

# WHL-DK6 Series 6" Disk Light Kelvin Field Selectable



## STANDARDS



## HOUSING

- Premium powder-coat, steel, white housing.

## ELECTRICAL

- Universal 120V AC voltage (60Hz) is standard.
- Triac dimming.
- Input transient surge protection = 0.5kV.
- Power factor > 0.90.
- Total Harmonic distortion < 20%.

## OPTICAL SYSTEM

- Polycarbonate diffuser.
- Field selectable 2700k(soft white), 3000k(warm white), 3500k(warm/neutral white), 4000k (neutral white) and 5000k (cool white) color temperatures\*.
- Provide 1,000 nominal lumens\*.
- Long-life LEDs provide 119,000 hours of operation with at least 70% of initial lumen output (L70).\*\*
- Beam angle 110°.
- Color rendering index > 90.

\* Factory Default kelvin temperature = 4000k and highest lumen output  
 \*\*L70 hours are IES TM-21-11 calculated hours.



## MOUNTING


- Surface mounting and retrofit installation.
- Covered ceiling mount.

## CODE COMPLIANCE

- cETLus listed for wet locations.
- Energy Star certified.
- Complies with FCC part 15, class B.

## WARRANTY

- 5 year warranty on all electronics and housing.

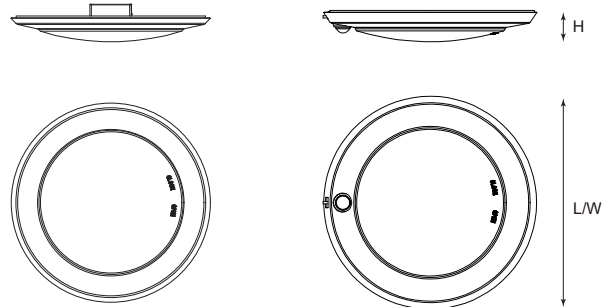

Model #	L (in)	W (in)	H (in)	Weight (lbs)
WHL-DK6-10L-KFS	7.23	7.23	1.36	0.53
WHL-DK6-10L-KFS-OS	7.4	7.4	1.03	0.48

## ORDERING INFORMATION

Example: DK6-10L-KFS-OS

Series	Nominal Lumen Output		Kelvin Selectable	Sensor
	10L	1000 lm		
WHL-DK6	10L	1000 lm	KFS 2700 / 3000/ 3500/ 4000/ 5000K	Blank OS No Sensor PIR Sensor

## COMPATIBLE DIMMERS AND CONTROLS

Manufacturer	Model Number		
Lutron	TG-600PR-WH	SLV-600P-AL	DVCL-153P
	S-600PR-WH	DV-600PR-WH	MSCL-OP153M
	CTCL-153PDH-WH	SCL-153PH-WH	PD-6WCL
	TGCL-153PH-LA	GT-600P	MACL-153M//MA-R
Leviton	6672	6674	IPL06
	RNL06	DSL06	-