


# WHL-E-1 LED Low Profile, Thermoplastic Emergency Light



## STANDARD



## ILLUMINATION

- Adjustable long lasting, efficient, ultra bright white LED lamp heads.
- One, 0.5W white LED per lamp head.
- Unique all-inclusive lamp, reflector and lens assembly.

## ELECTRICAL

- Dual 120/277 voltage standard. Optional dual 120/230 voltage available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- Surface mount back plate fits most standard size junction boxes and snaps into place.
- Suitable for wall or ceiling mount.

## HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.


## OPTIONS

- SPV: UL Listed for special voltage option.
- HL: Provides increased center-to-center spacing (2.0W per head).

## WARRANTY / LISTING

- One year warranty on all electronics and housing.
- UL Listed for damp locations (0°C – 30°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

## DIMENSIONS

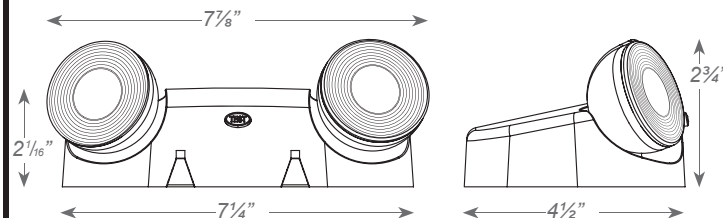

## ORDERING INFORMATION

Sample Part Number: WHL-E-1

MODEL	HOUSING COLOR		OPTIONS	
WHL-E-1	Blank	White	RC	Remote Capacity <sup>1</sup>
	B	Black	SPV	120/230 Volt 50/60Hz
			HL	High Lumen LED <sup>1</sup>

### NOTES:

<sup>1</sup> -HL and -RC options cannot be combined. 0.5W of remote capacity available standard with -HL option



Warehouse-Lighting.com  
2750 South 163<sup>rd</sup> St  
New Berlin, WI 53151

[Warehouse-Lighting.com](http://Warehouse-Lighting.com)  
Phone: 888-454-4480  
[info@warehouse-lighting.com](mailto:info@warehouse-lighting.com)

