

WHL-KZXTEU Thin Die-Cast Aluminum Exit Sign



WAREHOUSE-LIGHTING.COM

STANDARD



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 2.4V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.


HOUSING

- Premium-grade, die-cast aluminum housing (also available in optional black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators.
- Quick-snap face plate closure.
- Specification-grade, low profile, thin aluminum die-cast design.
- Available in single or double face only.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

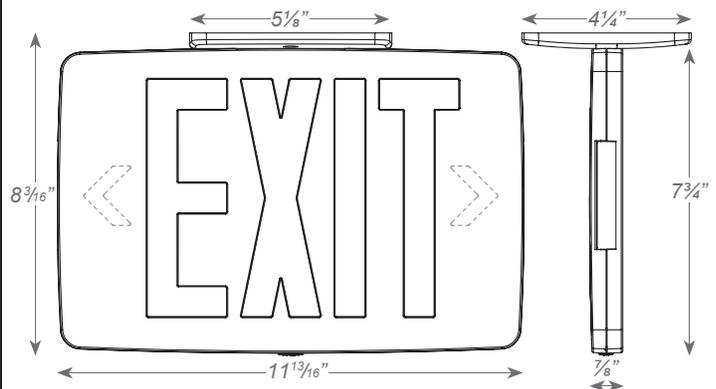

ORDERING INFORMATION

Sample Part Number: **WHL-KZXTEU1RW**

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY
WHL-KZXTEU	1	Single Face	R Red	(blank) AC-Only
	2	Double Face	G Green	EM Battery Backup
			A Aluminum	



WAREHOUSE-LIGHTING.COM

Warehouse-Lighting.com
2750 South 163rd St
New Berlin, WI 53151

Warehouse-Lighting.com
Phone: 888-454-4480
info@warehouse-lighting.com

WHL-KZXTEU Thin Die-Cast Aluminum Exit Sign

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
WHL-KZXTEU-RED/GREEN/EM	1.0	1.0	0.10	0.10