

# WHL-LEDCXTEU All LED Exit & Emergency Combo



## STANDARD



## OPTIONAL

### ILLUMINATION

- Long lasting, efficient ultra bright white LED lamp heads.
- 1 watt (8 LEDs x 0.125W) per head.
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing.
- Long life, energy efficient Red or Green LED EXIT sign illumination.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 9.6V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity option available.

### MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

### HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out chevron directional indicators.

### ORDERING INFORMATION

Special voltage & SALIDA face plate options available. Check with your Best Lighting Representative.

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
WHL-LEDCXTEU	2 Universal Single/ Double Face	R Red	W White	RC Remote Capacity
		G Green	B Black	HL High Lumen
				NH No Lamp Heads
				SDT Self-diagnostics
				CUSTOM Custom Wording



-NH model


### OPTIONS

- HL: 12-LED heads provide increased center-to-center spacing (1.5W per head).
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- NH: No lamp head attach to the unit enabling it to be used as remote capable exit sign.
- Custom: Signs available with requested 'special' wording.

### WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 40°C).
- Certified to CEC under Title 20 Regulations.

### DIMENSIONS

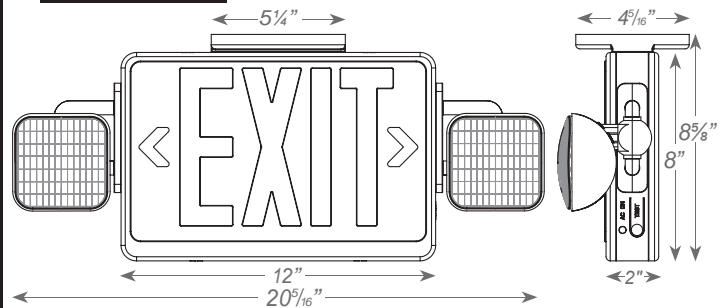

Warehouse-Lighting.com  
2750 South 163<sup>rd</sup> St  
New Berlin, WI 53151

[Warehouse-Lighting.com](http://Warehouse-Lighting.com)  
Phone: 888-454-4480  
[info@warehouse-lighting.com](mailto:info@warehouse-lighting.com)



# WHL-LEDCXTEU All LED Exit & Emergency Combo

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
WHL-LEDCXTE-RED	3.7	3.8	0.040	0.020
WHL-LEDCXTE-GREEN/RC	3.0	3.2	0.030	0.014
WHL-LEDCXTE-RED-RC	3.4	3.6	0.033	0.015
WHL-LEDCXTE-RED/GREEN-SDT/RC-SDT	5.2	5.7	0.046	0.022

## REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY														
			MRHLED	RHLED	RH16LED	RH16		RH		RHR		SRH		SRHLED			
				MV		6V	12V	6V	12V	6V	12V	6V	12V				
WHL-LEDCXTEU-RC	9.6V	3W-4W		X	X												