# WHL-SXTEU Steel Exit Sign



STANDARD

**OPTIONAL** 











Ultra bright, energy efficient, long life Red or Green LEDs.

# **ELECTRICAL**

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

#### MOUNTING

- Mounting canopy included for top or end mount.
- · Universal knockout pattern on back plate for wall mount.

#### HOUSING

- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Unique design allows double face conversion in the field.
- Field selectable steel knockout Chevron directional indicators.




# OPTIONS

 SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.

### WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C 50°C).
- Certified to CEC under Title 20 Regulations.

#### **DIMENSIONS**

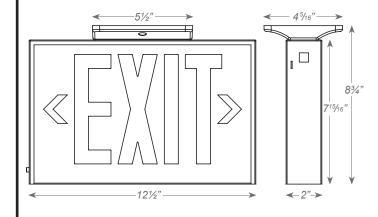

# ORDERING INFORMATION

MODEL		No. of FACES		LETTER COLOR		HOUSING COLOR		BATTERY		OPTIONS	
WHL-SXTEU	2	Universal Single/	R	Red	W	White	(blank)	AC-Only	SDT	Self-Diagnostics <sup>1</sup>	
h EM units.		Double Face	G	Green	В	Black	EM	Battery Backup			

WAREHOUSE-LIGHTING.COM

Warehouse-Lighting.com 2750 South 163<sup>rd</sup> St New Berlin, WI 53151 Warehouse-Lighting.com
Phone: 888-454-4480
info@warehouse-lighting.com

Sample Part Number: WHL-SXTEU2RWEM

# WHL-SXTEU Steel Exit Sign

CATALOG NUMBER	INPUT W	ATTS (W)	INPUT AMPS (A)		
	120V	277V	120V	277V	
WHL-SXTEU-RED/GREEN/EM/SDT	3.8	3.8	0.034	0.020	

