

WHL-WLEZXTEU Compact Wet Location Polycarbonate Exit Sign



STANDARD



OPTIONAL



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Polycarbonate mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING

- 5VA flame retardant, UV-stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.
- Knockouts provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.


OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.
- Custom: Signs available with requested "special" wording.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (-20°C – 50°C).
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

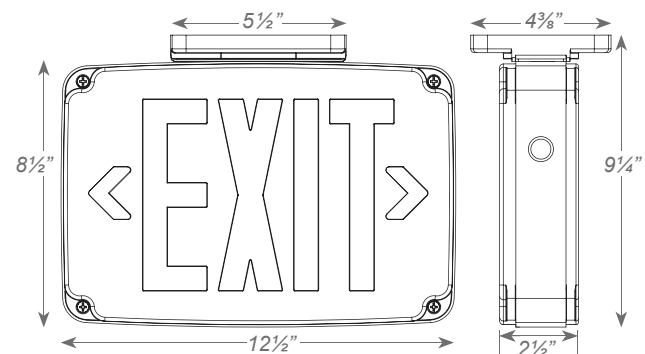

ORDERING INFORMATION

Sample Part Number: **WHL-WLEZXTEU1RWEM-CW**

Special voltage & SALIDA face plate options available. Check with your Best Lighting Representative.

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
WHL-WLEZXTEU	1 Single Face	R Red	W White (with white faceplate)	(blank) AC-Only	SDT Self-Diagnostics ¹
	2 Double Face	G Green	B Black (with black faceplate)	EM-CW Battery Backup (Cold Weather Standard)	2C Dual Circuit Operation ²
			G Gray (with white faceplate)		TP Tamper-Proof
					CUSTOM Custom Wording

¹ Available only with EM units.

² Available only with AC units.

Warehouse-Lighting.com
2750 South 163rd St
New Berlin, WI 53151

Warehouse-Lighting.com
Phone: 888-454-4480
info@warehouse-lighting.com



WHL-WLEZXTEU Compact Wet Location Polycarbonate Exit Sign

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
WHL-WLEZXTEU-RED/GREEN	2.7	2.7	0.025	0.011
WHL-WLEZXTEU-RED/GREEN/EM/SDT	3.3	3.4	0.030	0.014
WHL-WLEZXTEU-RED/GREEN-2C	2.4	2.4	0.023	0.011