



INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_

# Cylinder Series



This sleek and contemporary cylinder light is available in 4" and 6" diameters, black or white finish, and with a 60° beam angle. It can be surface mounted or suspended by rod or cord. A switch inside the fixture allows the selectable CCT (3500K/4000K/5000K) to be set in the field. Applications include residential, commercial offices and conference rooms, reception, atrium spaces, retail, and education facilities.

## Specifications – 4" Cylinder

CRI	>80	Beam Angle	60°
Light Source	LED	Mounting Options	Surface / Suspended
Dimmable	0-10v	Operating Temperature	30°-40°C (-22°F - +104° F)
CCT	Selectable 3500K/4000K/5000K	Housing	Extruded Aluminum
Wattage	15W	Voltage	120-277v
LPW	100-110 LPW	Finish	Black / White
Lumens	1650	Warranty	5 Years
Ratings and Certifications	cULus		

*\*Data is considered to be representative of the series. Actual production may vary between up to ±10% of initial delivered lumens.*





INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_

## Order Information


Cylinder Series					Example: WL-CYL4-15W-SCCT-0-10V-UNV-S-BK-G1			
Series	Size	Wattage	Color Temperature	Dimming	Voltage	Mounting	Color	Generation
WL-CYL	<b>4</b> 4 Inch	<b>15W</b> 15 Watt	<b>SCCT</b> Select 3500K/4000K/5000K	<b>0-10V</b>	<b>UNV</b> 120-277V	<b>S</b> Surface	<b>BK</b> Black	G1
	<b>6</b> 6 Inch	<b>25W</b> 25 Watt					<b>WH</b> White	

## Mounting Options

Pendant Kit



Rod Pendant Kit

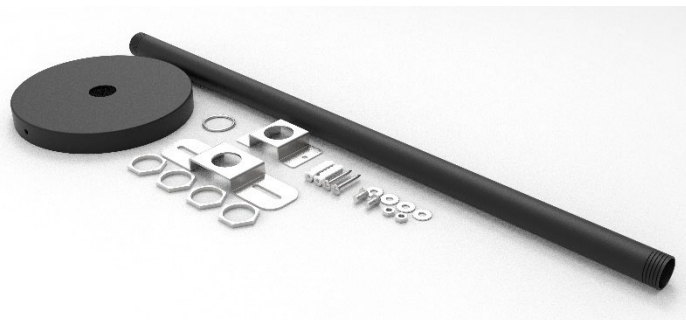



INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_

## Dimensions

Item	Diameter	Height	Weight
WL-CYL4-15W-SCT-0-10V-UNV-S-BK-G1	4"	12"	1.98 lbs
WL-CYL4-15W-SCT-0-10V-UNV-S-WH-G1	4"	12"	1.98 lbs
WL-CYL6-25W-SCT-0-10V-UNV-S-BK-G1	6"	12"	3.97 lbs
WL-CYL6-25W-SCT-0-10V-UNV-S-WH-G1	6"	12"	3.97 lbs

