



INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____

Cylinder Series



This sleek and contemporary cylinder light is available in 4” and 6” diameters, black or white finish, and with a 60° beam angle. It can be surface mounted or suspended by rod or cord. A switch inside the fixture allows the selectable CCT (3500K/4000K/5000K) to be set in the field. Applications include residential, commercial offices and conference rooms, reception, atrium spaces, retail, and education facilities.

Specifications – 6” Cylinder

CRI	>80	Beam Angle	60°
Light Source	LED	Mounting Options	Surface / Suspended
Dimmable	0-10v	Operating Temperature	30°-40°C (-22°F - +104° F)
CCT	Selectable 3500K/4000K/5000K	Housing	Extruded Aluminum
Wattage	25W	Voltage	120-277v
LPW	100-110 LPW	Finish	Black / White
Lumens	2200	Warranty	5 Years
Ratings and Certifications	cULus		

**Data is considered to be representative of the series. Actual production may vary between up to ±10% of initial delivered lumens.*





INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____

Order Information


Cylinder Series					Example: WL-CYL4-15W-SCCT-0-10V-UNV-S-BK-G1			
Series	Size	Wattage	Color Temperature	Dimming	Voltage	Mounting	Color	Generation
WL-CYL	4 4 Inch	15W 15 Watt	SCCT Select 3500K/4000K/5000K	0-10V	UNV 120-277V	S Surface	BK Black	G1
	6 6 Inch	25W 25 Watt					WH White	

Mounting Options

Pendant Kit



Rod Pendant Kit

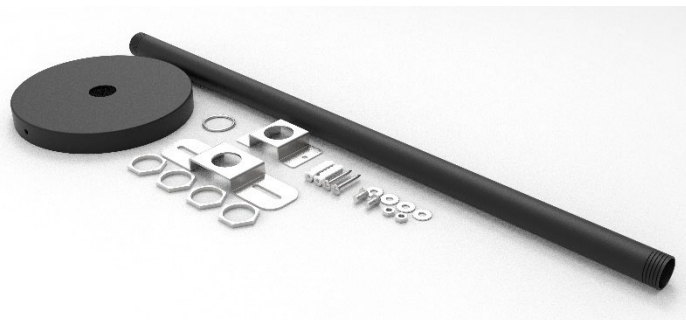



INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____

Dimensions

Item	Diameter	Height	Weight
WL-CYL4-15W-SCT-0-10V-UNV-S-BK-G1	4"	12"	1.98 lbs
WL-CYL4-15W-SCT-0-10V-UNV-S-WH-G1	4"	12"	1.98 lbs
WL-CYL6-25W-SCT-0-10V-UNV-S-BK-G1	6"	12"	3.97 lbs
WL-CYL6-25W-SCT-0-10V-UNV-S-WH-G1	6"	12"	3.97 lbs

