



WAREHOUSE-LIGHTING.COM  
INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_

# Vapor Tight Series



WareLight LED Vapor Tight fixtures are designed to save energy and meet your lighting requirements in harsher than normal environments. They can be used indoors or outdoors. They provide superior light distribution and are intended for applications where moisture and/or dust may be present. Applications include car washes, food processing, gas stations, laboratories, industrial facilities, refrigeration/freezers, parking garages, and warehouses.

## Specifications – 8 Foot

CRI	>82	Certifications	UL/cUL us listed for Wet Locations, IP66, NSF Rated, NEMA4X
Light Source	LED	Mounting Options	Surface
Dimmable	0-10V	Operating Temp	-20 ~ 55 °C (-4° F to +131° F)
CCT	Select 3500K/4000K/5000K	Lens	Polycarbonate lens, high flame-retardant point
Wattage	Select 80W/90W/100W	Product Dimensions	94.5" L x 4.92" W x 3.97" H
LPW	130	Weight	12.12 lbs
Lumens	13,000*	Warranty	5 Years
Voltage	120-277V		

\*Lumen and efficacy are based on the highest wattage 5000K. Data is considered to be representative of the series. Actual production may vary up to ±10% initial delivered lumens.





WAREHOUSE-LIGHTING.COM  
INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003


PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_

## Order Information

Vapor Tight Series WL-VT					Ex: WL-VT4-3CWS-60W-DMV
Series	Length	Light Source	Color Temperature	Wattage	Voltage/Dimming
WL-VT	<b>4</b> 4' Fixture	LED	<b>3CWS</b> 3500K/4000K/5000K	<b>60W</b> 40W/50W/60W	<b>DMV</b>  120-277V
	<b>8</b> 8' Fixture			<b>100W</b> 80W/90W/100W	0-10V Dimming

## Mount Option


Surface (Included)



## Dimensions

Item	Length	Width	Height	Weight
WL-VT4-LED-3CWS-60W-DMV-G3	47.2"	4.92"	3.62"	5.51 lbs
WL-VT8-LED-3CWS-100W-DMV-G3	94.5"	4.92"	3.97"	12.12 lbs

4FT

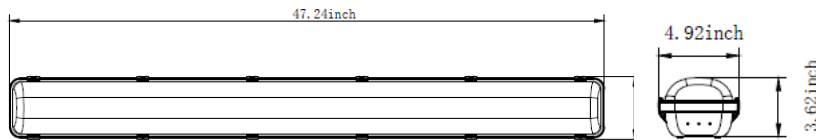

8FT

