

WMXE SERIES LED OUTDOOR LIGHTING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

WMXE-MD-80-120W-MCTP-P-EM

ADJUSTABLE BUILDER SERIES TRADITIONAL WALL PACK WITH EMERGENCY BACKUP


MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

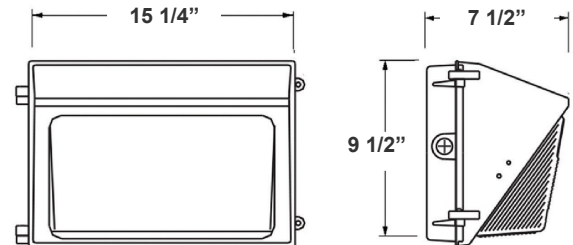

15 1/4"(W) x 9 1/2"(H) x 7 1/2"(D)

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

Features

- ADC12 Aluminum Heat Sink, Outdoor Powder Coating
- Multi-Power Switch is inside the Fixture
- IP67 Stainless Steel Test Button with Integrated Indicator Light
- 7-year warranty
- Prismatic Borosilicate Glass Lens
- 8W, 48V, 2500mAh Li-ion Battery for Minimum 90 Minutes Emergency Operation

Technical Specification

Electrical:

- Input Wattage: 80/100/120W
- Input Voltage: 120-277V AC 50/60Hz
- Input current: 1.0 A
- Power factor: >0.9
- Efficacy: 140 LP

Mechanical:

- ADC12 Aluminum Heat Sink, Outdoor Powder Coating
- Lens: Prismatic Borosilicate Glass Lens
- DC Button Photocell with ON/OFF switch Included
- Same Footprint as Traditional HID Wall Packs
- Four 1/2" Hubs: 1 top, 1 on Each Side, 1 Rear
- Mounting: Wall Mounting
- Operating Temperature: -40°F ~ 104°F
- IP67 Stainless Steel Test Button with Integrated Indicator Light, Wet Locations

Lighting:

- Dimming: 0-10V Dimming
- Multi-Power Switch is inside the Fixture
- Total Lumens: 16800LM Max.
- Color Temperature: 3000K/4000K/5000K
- 8W, 48V, 2500mAh Li-ion Battery for Minimum 90 Minutes Emergency Operation
- CRI: >70
- Lifespan: 70000 Hrs.

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID wall packs
- Great for use with photocell

Other Models:

• 65W | 9100LM | WMXE-MD-25-65W-MCTP-P

• 85W | 11900LM | WMXE-MD-45-85W-MCTP-P





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |




WMG-06282022

Photometrics: WMXE-MD-80-120W-MCTP-P-EM



BUG Rating: B3-U4-G4

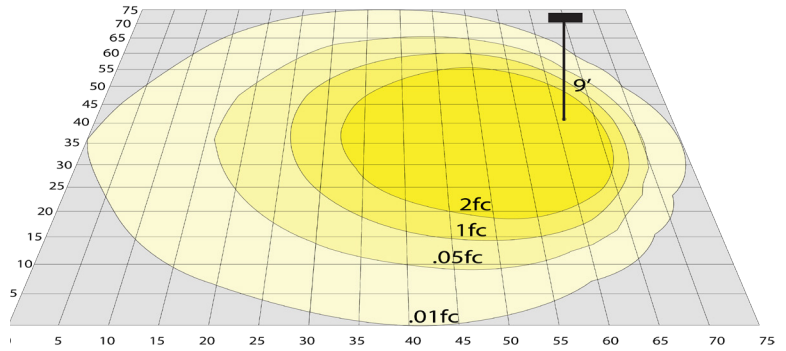

Area 75'x 75' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: WMXE-MD-80-120W-MCTP-P-EM

| MODEL NO. | Wattage | Voltage | Lumens | Color Temp. | BUG Rating | LPW |
|---------------------------|---------|----------|--------|-------------------------|------------|-----|
| WMXE-MD-80-120W-MCTP-P-EM | 80W | 120-277V | 11200 | 3000K 4000K 5000K | B3-U4-G4 | 140 |
| | 100W | | 14000 | | | |
| | 120W | | 16800 | | | |



Sample Ordering

| Model | Size | Min. Watt | Max. Watt | Color Temp. | Photocell | Battery |
|-------|------|-----------|-----------|-------------|-----------|---------|
| WMXE | - MD | - 80 | - 120W | - MCTP | - P | - EM |

Accessories:

Blank = No Option For Accessories
 WML-SH2= SHIELD FOR WMXE 60W

Factory-Installed Options:

Blank = No Option For Accessories
 OPT-SEN-3MRLV-5= PROGRAMMABLE MICROWAVE
 OPT-CLR-85= COLOR PAINT
 WEC-8RC= REMOTE CONTROL
 OPT-TRS-T20= TAMPER RESISTANT SCREW

ACCESSORY:



WML-SH2

FACTORY-INSTALLED OPTIONS:



WEC-8RC



OPT-SEN-3MRLV-5

Example:

1. WMXE-MD-80-120W-MCTP-P-EM

(FOR 120W WMXE MCTP FIXTURE 120-277V)

2. WMXE-MD-80-120W-MCTP-P-EM
 OPT-EM-OD3INT

(FOR 120W WMXE MCTP FIXTURE 120-277V)
 (INTERNAL EMERGENCY BACKUP BATTERY)

Dimensions:



WML-SH2
 SHIELD FOR WMXE 120W

