

WPX SERIES Outdoor Lighting

WPX-42W-MCTP
LED CUT-OFF WALL PACK


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____



Project Name: _____

Note: _____

Type: _____

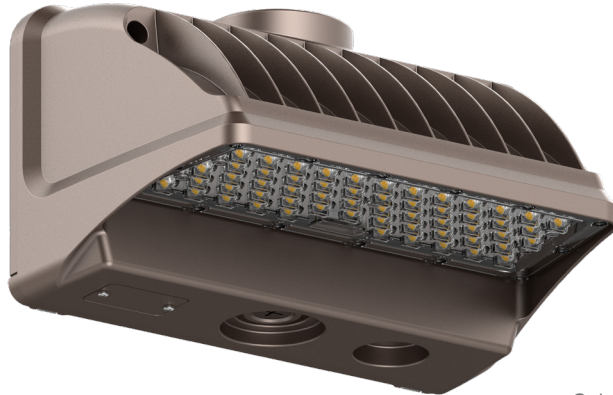

Selection:

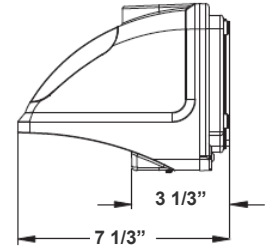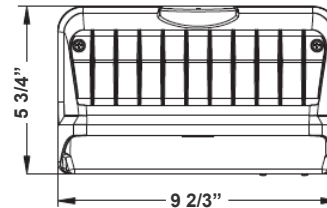

9 2/3" (W) x 5 3/4" (H) x 7 1/3" (D)

LED Wall Pack Light series can be widely used as Exterior or Interior LED lighting for Hotels, Garages, Commercial Buildings, Public areas, Schools and Hospitals, etc.

Features

- High Light Transmittance, Anti-UV and Fire Resistant PC Lens
- 7-Year Warranty
- Die-Cast Aluminum With Powder Coat Finish (Dark Bronze)
- Multi CCT and Power (Switches are inside fixture)

Technical Specifications

Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 11W/ 21W/ 32W/ 42W
- Power Factor: >0.95
- Efficacy: 135 LPW

Mechanical:

- Die-Cast Aluminum With Powder Coat Finish (Dark Bronze)
- High Light Transmittance, Anti-UV and Fire Resistant Shatterproof PC Lens
- Operating Temperature: -4°F to 104°F
- IP 65
- Wet Location
- 7-Year Warranty
- Full Cutoff, Dark sky Compliant

Other Models:

- 80W | 10800LM | WPX-80W-MCTP

Lighting:

- Dimming: 0~10V Dimmable
- Multi CCT and Power (Switches are inside fixture)
- The Type II Distribution Is Used for Wide Walkways, on Ramps and Entrance Roadways, As Well As Other Long, Narrow Lighting
- Total Lumens: 5670LM Max.
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Rated life: 70,000 Hrs

Applications:

- LED Wall Pack Light series can be widely used as Exterior or Interior LED lighting for Hotels, Garages, Commercial Buildings, Public areas, Schools and Hospitals, etc.



Lighting Supplier Since 2003




WAREHOUSE-LIGHTING.COM


Warehouse-Lighting.com
2750 South 163rd St
New Berlin, WI 53151

Warehouse-Lighting.com
Phone: 888-454-4480
info@warehouse-lighting.com

Photometrics: WPX-42W-MCTP

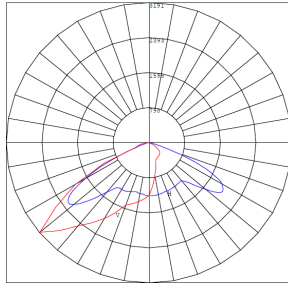

BUD Rating: B0-U0-G1

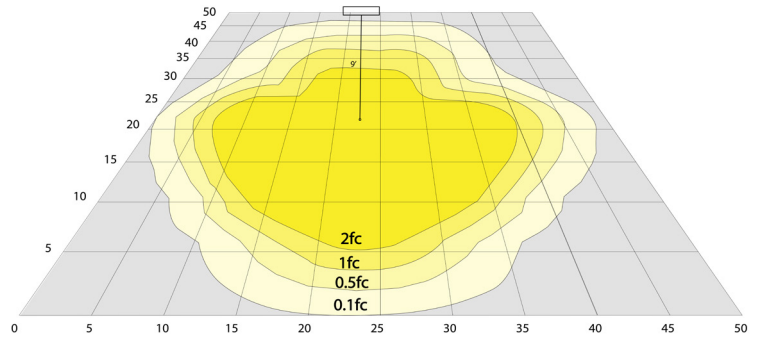

Area 45'x 50' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: WPX-42W-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WPX-42W-MCTP	11W	120~277V	1485LM	3000K 4000K 5000K	B0-U0-G1	135
	21W		2835LM			
	32W		4320LM			
	42W		5670LM			

Sample Ordering

Model Wattage. Color Temp.

WPX - 42W - MCTP

Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-OD1INT= INTERNAL EMERGENCY BACKUP BATTERY

OPT-SEN-3MRLV-5= PROGRAMMABLE MICROWAVE BI-LEVEL

OPT-CLR-85= COLOR PAINT

OPT-TRS-T20= TAMPER RESISTANT SCREW

OPT-PC-B = PHOTOCELL 120-277V

WEC-8RC = OPTIONAL REMOTE

Example:

1. WPX-42W-MCTP

2. WPX-42W-MCTP
OPT-EM-OD1INT

FACTORY-INSTALLED OPTIONS:



OPT-EM-OD1INT



OPT-SEN-3MRLV-5



WEC-8RC



OPT-PC-B

(FOR WPX 42W MCTP FIXTURE 120-277V)

(FOR WPX 42W MCTP FIXTURE 120-277V)
(INTERNAL EMERGENCY BACKUP BATTERY)

Lighting Supplier Since 2003



WAREHOUSE-LIGHTING.COM

Warehouse-Lighting.com
2750 South 163rd St
New Berlin, WI 53151

Warehouse-Lighting.com
Phone: 888-454-4480
info@warehouse-lighting.com