



HI-LITE MFG. CO., INC.

13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Toll Free: (800) 465-0211
Fax: (909) 465-0907
www.hilitemfg.com


Job Name: _____
Type: _____
Quantity: _____

Item Number	Height (A)	Width (B)	Length (C)	Projection (D)
H-CGU-SS-8-2B	10"	8"	20"	10"
H-LCGU-SS-10-2B	13"	10"	22 1/2"	12"
H-LCGU-SS-12-2B	13"	12"	30"	15"

For Wall Mount Only

Fixture No.	Fixture Color	Glass Color	Wattage/ Lamp options	Ballast	Voltage
H-CGU-SS-8-2B⁽¹⁾ H-LCGU-SS-10-2B⁽¹⁾ H-LCGU-SS-12-2B⁽¹⁾	Standard 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust) BK01, GN20. Upgraded Finishes ⁽²⁾ 29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 98, 101, 102, 137, 138, 139, 140, 121, 122, 123, 124, 125, 126, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49. For finish specs see pages 344-348.	CLR (Clear) RIB (Clear Ribbed) FR (Frost) RD (Red) BL (Blue) GRN (Green) AM (Amber) AMC (Amber Crackle)	Incandescent (4) (Fixture is standard 2-100W or 2-200W. Do not specify.) CFL (4) (Compact Fluorescent) 2-13/CFL 2-18/CFL 2-26/32/42/CFL 2-26/CFL 2-32/CFL 2-42/CFL 2-57/CFL DMB (Dimmable Ballast for CFL. Add to Part No.) HID (High Intensity Discharge) MH (4) (Metal Halide) 2-35/MH 2-50/MH 2-70/MH 2-100/MH 2-150/MH 2-175/MH HPS (4) (High Pressure Sodium) 2-50/HPS 2-70/HPS 2-100/HPS 2-150/HPS LED 20W 30W	Ballast option not available for INC For CFL only BCM (3) (Canopy Mount) For HID only RB (3) (Remote) For specs see pages 341-343.	Incandescent (Fixture is standard 120V. Do not specify.) CFL M (Multi 120/277V) HID RB and BCM M (Multi 120/208/240/277V)
			LED See specifications for complete part number.	LED See specifications for complete part number.	LED See specifications for complete part number.

Angle Vapor Jar Collection

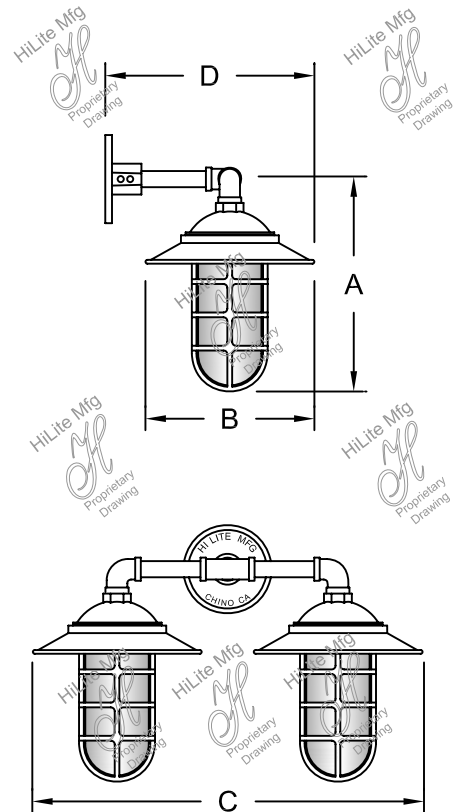

H-CGU-SS-8-2B - 91 - CLR / 2-13/CFL - BCM - M

ORDER EXAMPLE

(USE THIS FORMAT TO PLACE ORDER)

Notes:

- (1) H-CGU-SS-8-2B available for 2-100W Max INC, 2-32W Max CFL and 2-100W Max HID. H-LCGU-SS-10-2B and H-LCGU-SS-12-2B available for 2-200W Max INC, 2-57W Max CFL and 2-175W Max HID. Above fixtures available with WGU wireguard.
- (2) Casting will be painted to match copper and brass finishes.
- (3) (RB) Remote Ballast not available for Fluorescent Lamping. (BCM) Ballast Canopy Mount not available for HID Lamping.
- (4) Socket Bases: INC and HID are medium base, CFL are GX24Q.

Suitable for wet location.