



INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____

Beam IP66 Series



This IP66 rated linear light fixture can fulfill several lighting needs. It can be surface, suspended, or pendant mounted. A switch on top of the fixture allows the selectable CCT (3500K/4000K/5000K) to be set in the field. It is constructed of extruded aluminum and has a snap in polycarbonate diffuser to help reduce glare. Applications include outdoor patios, washdown bay, parking structures, rooftop bars, pergolas, overhangs, and pavilions.

Specifications – 4 Foot

CRI	>80	Beam Angle	Wide
Light Source	LED	Mounting Options	Surface and Pendant Rod Suspension
Dimmable	0-10v	Operating Temperature	-30° C to 40° C (-22° F to 104° F)
CCT	Selectable 3500K/4000K/5000K	Housing	Extruded Aluminum
Wattage	Selectable 40W/60W/80W	Voltage	120-277v
LPW	105	Finish	White
Lumens	4400-8800	Warranty	5 Years
Ratings and Certifications	cULus, IP66, Wet Location		

**Data is considered to be representative of the series. Actual production may vary between up to ±10% of initial delivered lumens.*





INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____

Order Information

Beam 1P66			EX: BEAMLED4-IP66-3CT-SUSP-DMV-G1		
Series	IP Rating	Color Temperature	Mount	Dimming/Voltage	Generation
BEAMLED4	IP66	3CT Select 3500K/4000K/5000K	SUSP Suspended Mount SURF Surface Mount	DMV 0-10V Dimming 120-277V (Universal Voltage)	G1

Mounting Options

Surface



Pendant Rod Suspension



Dimensions


Item	Length	Width	Height	Weight
BEAMLED4-IP66-3CT-SUSP-DMV-G1	47.5"	4.19"	4.00"	10.43 lbs
BEAMLED4-IP66-3CT-SURF-DMV-G1	47.5"	4.19"	3.74"	10.91 lbs
BEAMLED8-IP66-3CT-SUSP-DMV-G1	94.4"	4.19"	4.00"	20.00 lbs
BEAMLED8-IP66-3CT-SURF-DMV-G1	94.4"	4.19"	3.74"	20.50 lbs



INDUSTRIAL AND COMMERCIAL
LIGHTING MFR SINCE 2003

PROJECT NAME _____
ITEM # _____
FIXTURE SCHEDULE _____
NOTES _____

BEAMLED4

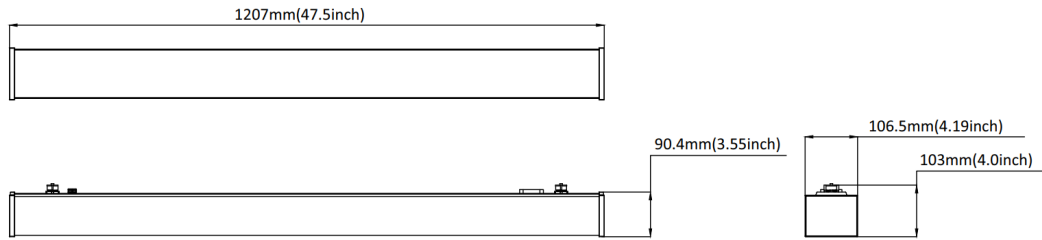

BEAMLED8

