



Job Name: _____
 Type: _____
 Quantity: _____


**HI-LITE MFG.
 CO., INC.**

13450 Monte Vista Avenue
 Chino, California 91710
 Telephone: (909) 465-1999
 Fax: (909) 465-0907

Fixture No.	Height (A)	Width (B)	Canopy (C)
H-28114-F	7 1/2"	14"	7"
H-28116-F	8 1/2"	16"	7"
H-28118-F	9 1/2"	18"	9"
H-28124-F	11 1/2"	24"	9"

For Flush Mount Only

Self Ballasted Cordelia Collection

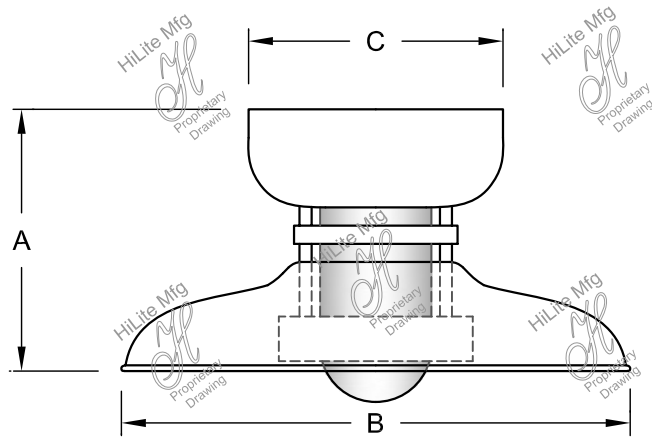

Fixture No.	Fixture Color	Glass Color	Optional Accessories	Wattage/Lamp Options	Ballast Options	Voltage
H-28114-F (1)	Standard (2)	CLR (Clear)	CAL (Clear Acrylic Layer)	Incandescent (1) (5) (Fixture is standard 100W or 200W. Do not specify.)	Ballast option not available for INC.	Incandescent (Fixture is standard 120V. Do not specify.)
H-28116-F (1)	91 (Black)	RIB (Clear Ribbed)	BAL (Blue Acrylic Layer)	CFL (5) (Compact Fluorescent)	RB (3) (Remote)	CFL M (Multi 120/277V)
H-28118-F (1)	93 (White)	FR (Frost)	RAL (Red Acrylic Layer)	13/CFL	OBB (4) (Onboard)	HID RB and BCM
H-28124-F (1)	95 (Dk. Grn)	RD (Red)	GNAL (Green Acrylic Layer)	26/32/42/CFL	OBB (4) (Fluorescent Options 13W-57W)	M (Multi 120/208/240/277V)
	96 (Galv.)	BL (Blue)	For specs see pages 321-344.	26/CFL	For specs see pages 341-343.	
	BR47 (Rust)	GRN (Green)		32/CFL		
	BK01, GN20.	AM (Amber)		42/CFL		
	Upgraded Finishes.	AMC (Amber Crackle)		57/CFL		
	29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 98, 101, 102, 137, 138, 139, 140, 121, 122, 123, 124, 125, 126, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16.			DMB (Dimmable Ballast for CFL. Add to Part No.)		
	For finish specs see pages 344-348.			HID (High Intensity Discharge)		
				MH (5) (Metal Halide)		
				35/MH		
				50/MH		
				70/MH		
				100/MH		
				150/MH		
				175/MH		
				HPS (5) (High Pressure Sodium)		
				50/HPS		
				70/HPS		
				100/HPS		
				150/HPS		
				LED	LED See specifications for complete part number.	LED See specifications for complete part number.
				20W		
				30W		

H-28114-F - 91 - CLR / CAL / 13/CFL - OBB - M

ORDER EXAMPLE
 (USE THIS FORMAT TO PLACE ORDER)

Notes:

- (1) H-28114-F and H-28116-F available for 100W Max INC, 32W Max CFL and 100W Max HID.
 H-28118-F and H-28124-F available for 200W Max INC, 57W Max CFL and 175W Max HID.
- (2) For interior finish of fixture refer to color chart on pages 344-348.

- (3) (RB) Remote Ballast not available for Fluorescent Lamping.
- (4) OBB will add 4" to fixture height.
- (5) Socket Bases: INC and HID are medium base, CFL are GX24Q.

Suitable for wet location.