



HI-LITE MFG. CO., INC.

13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Toll Free: (800) 465-0211
Fax: (909) 465-0907
www.hilitemfg.com

Job Name: _____
Type: _____
Quantity: _____

Item Number	Height (A)	Width (B)	Projection (C)	Canopy (D)
H-FGU-HB	10"	4"	6"	5"
H-FGU-1HB	10"	10"	8"	5"
H-LFGU-HB	12"	5"	7"	6"
H-LFGU-1HB	12"	13"	11"	6"

**For Wall
Mount Only**

Fixture No.	Fixture Color	Glass Color	Optional Accessories	Wattage/ Lamp options	Ballast	Voltage
H-FGU-HB (1)	Standard	CLR (Clear)	CAL (Clear Acrylic Layer)	Incandescent (1) (4)	Ballast option not available for INC.	Incandescent (Fixture is standard 120V. Do not specify.)
H-FGU-1HB (1)	91 (Black) 93 (White)	RIB (Clear Ribbed)	BAL (Blue Acrylic Layer)	(Fixture is standard 100W or 200W. Do not specify.)	RB (3) (Remote)	CFL M (Multi 120/277V)
H-LFGU-HB (1)	95 (Dk. Grn) 96 (Galv.)	FR (Frost)	RAL (Red Acrylic Layer)	CFL (4) (Compact Fluorescent)	BCM (Canopy Mount)	HID RB and BCM M (Multi 120/208/240/277V)
H-LFGU-1HB (1)	BR47 (Rust) BK01, GN20.	RD (Red)	GNAL (Green Acrylic Layer)	13/CFL 18/CFL 26/32/42/CFL 26/CFL 32/CFL 42/CFL 57/CFL	For specs see pages 341-343.	
	Upgraded Finishes.(2) 29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 98, 101, 102, 137, 138, 139, 140, 121, 122, 123, 124, 125, 126, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49.	BL (Blue)	For specs see pages 321-344.	DMB (Dimmable Ballast for CFL. Add to Part No.)		
	For finish specs see pages 344-348.	GRN (Green)		HID (High Intensity Discharge)		
		AM (Amber)		MH (4) (Metal Halide) 35/MH 50/MH 70/MH 100/MH 150/MH 175/MH		
		AMC (Amber Crackle)		HPS (4) (High Pressure Sodium) 50/HPS 70/HPS 100/HPS 150/HPS		
				LED 20W 30W	LED See specifications for complete part number.	LED See specifications for complete part number.





H-FGU-HB - 91 - CLR / - / 13/CFL - BCM - M

ORDER EXAMPLE
(USE THIS FORMAT TO PLACE ORDER)


Notes:

- (1) H-FGU-HB and H-FGU-1HB available for 100W Max INC, 32W Max CFL and 100W Max HID. H-LFGU-HB and H-LFGU-1HB available for 200W Max INC, 57W Max CFL and 175W Max HID.
- (2) Casting will be painted to match copper and brass finishes.
- (3) (RB) Remote ballast not available for fluorescent lamping.
- (4) Socket Bases: INC and HID are medium base, CFL are GX24Q.

Layered Vapor Jar Collection

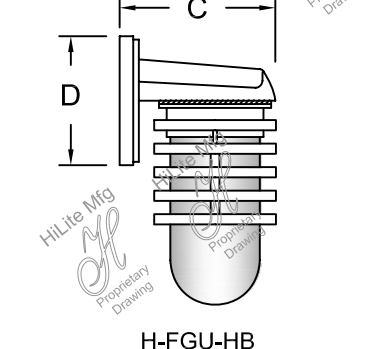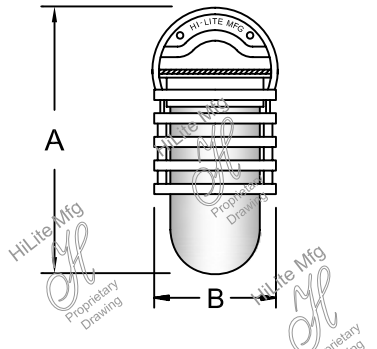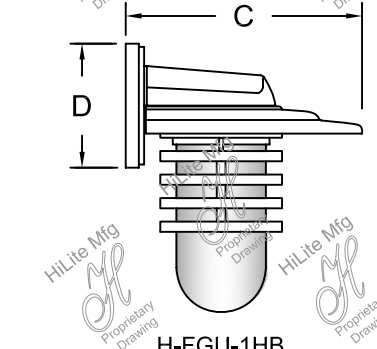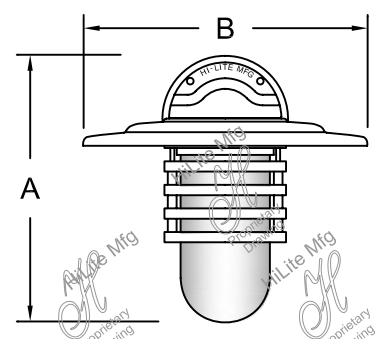

**H-FGU-HB
H-LFGU-HB**

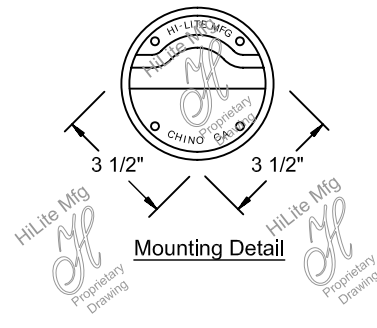

Suitable for wet location.