




Job Name: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Quantity: \_\_\_\_\_

# HI-LITE MFG. CO., INC.

13450 Monte Vista Avenue  
 Chino, California 91710  
 Telephone: (909) 465-1999  
 Toll Free: (800) 465-0211  
 Fax: (909) 465-0907  
 www.hilitemfg.com

Item Number	Height (A)	Width (B)
H-7230	10 1/2"	9 3/4"

## MC Headlight Collection

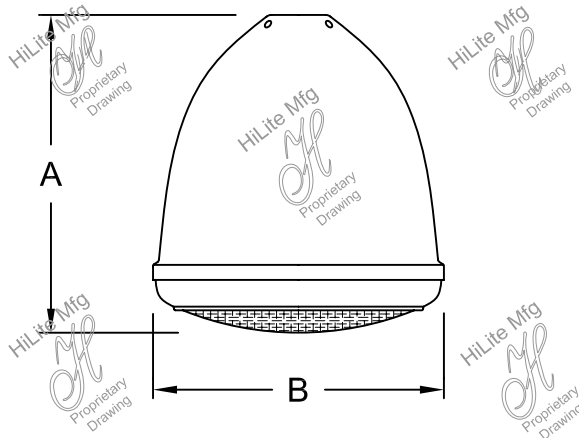

Fixture No.	Fixture Color	Lens Color	Mounting	Mounting Color	Wattage/Lamp options	Ballast	Voltage
H-7230	Standard (1) 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust) BK01, GN20.  Upgraded (1) Finishes. 29, 66, 82, 92, 97, 100, 103, 104, 105, 112, 113, 114, 117, 118, 119, 127, 128, 133, 134, 135, 136, 98, 101, 102, 137, 139, 140, 121, 122, 123, 124, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16.  For finish specs see pages 344-348.	<b>RIB</b> (Clear Ribbed)  <b>FR</b> (Frost)  <b>RD</b> (Red)  <b>BL</b> (Blue)  <b>GRN</b> (Green)  <b>AM</b> (Amber)	Cord Options <sup>(2)</sup> <b>CB8</b> (8' Blk Cord) <b>CW8</b> (8' Wht Cord) <b>CG8</b> (8' Gray Mesh Cord)  Custom Cord Options <sup>(2)</sup> <b>CB</b> (Black) <b>CW</b> (White) <b>CG</b> (Gray Mesh) Specify length.  Stem Options (Stem 1/2") <b>ST</b> Specify length and canopy. <b>HSC</b> (Canopy) <b>SMC</b> (Canopy)  Flush Mount Options <b>FHSC</b> <b>FSMC</b>  For specs see pages 321-344.	Standard <b>91</b> (Black) <b>93</b> (White) <b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust)  For all finishes see pages 344-348.	Incandescent (3) (Fixture is standard 100W. Do not specify)  CFL (3) (Compact Fluorescent) <b>13/CFL</b> <b>18/CFL</b> <b>26/32/42/CFL</b> <b>26/CFL</b> <b>32/CFL</b> <b>42/CFL</b>  <b>DMB</b> (Dimmable Ballast for CFL. Add to Part No.)	Ballast option not available for INC.  <b>BCM</b> (Canopy Mount)  For specs see pages 341-343.	Incandescent (Fixture is standard 120V. Do not specify.)  CFL <b>M</b> (Multi 120/277V)

H-7230	91	RIB	1/2"	91	13/CFL	BCM	M
--------	----	-----	------	----	--------	-----	---

### ORDER EXAMPLE (USE THIS FORMAT TO PLACE ORDER)

#### Notes:

- (1) For interior finish of fixture refer to color chart on pages 344-348. (3) Socket Bases: INC is medium base. CFL is GX24Q.  
 (2) Cord Mounting wattage not to exceed 100 for HID. Gray Mesh Cord not available for HID.

**Cord-hung fixtures:** suitable for dry location only.  
**Stem-hung fixtures:** suitable for damp & dry location.