




HI-LITE MFG. CO., INC.

13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Fax: (909) 465-0907

Job Name: _____
Type: _____
Quantity: _____

For Wall
Mount Only

Item Number	Height (A)	Width (B)	Projection (C)	Diameter of Canopy (D)
H-4111-B	11"	12"	13 3/4"	6 1/4"
H-4314-B	12 3/4"	14"	15"	6 1/4"
H-4316-B	14"	16"	18"	6 1/4"

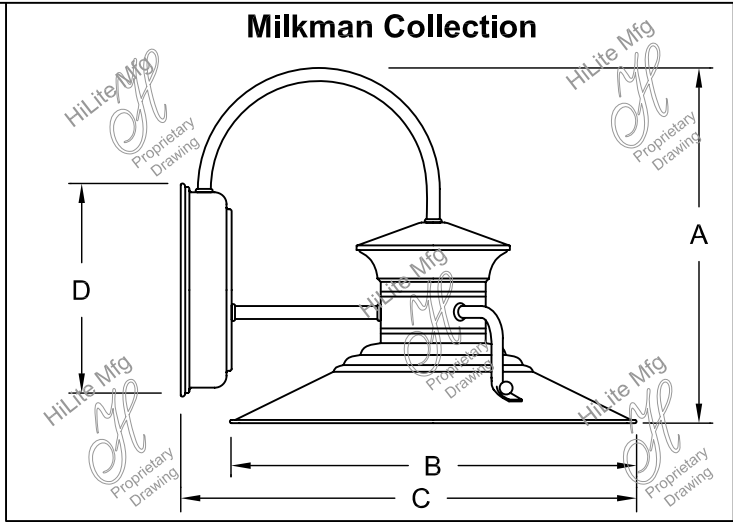

Fixture No.	Fixture Color	Optional Accessories	Accessory Color	Wattage/Lamp options	Ballast	Voltage
H-4111-B (1)	Standard (2) 91 (Black)	CGU (Cast guard & glass)	Standard 91 (Black)	Incandescent (5) (Fixture is standard 100W or 200W. Do not specify.)	Ballast option not available for INC.	Incandescent (Fixture is standard 120V. Do not specify.)
H-4314-B (1)	93 (White)	LCGU (Large cast guard & glass)	93 (White)	CFL (3) (5) (Compact Fluorescent)	RB (4) (Remote)	CFL M (Multi 120/277V)
H-4316-B (1)	95 (Dk. Grn) 96 (Galv.) BR47 (Rust) BR01, GN20.	WGU (Wire guard & glass)	95 (Dk. Grn) 96 (Galv.) BR47 (Rust)	13/CFL 18/CFL 26/32/42/CFL 26/CFL 32/CFL 42/CFL 57/CFL	OBB (Onboard)	HID RB and BCM M (Multi 120/208/240/277V)
	Upgraded Finishes 29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 138, 139, 140, 01, 11, 22, 25, 33, 77, 89, 24, 44, 48, 49.	LWGU (Large wire guard & glass)	For all finishes see pages 344-348.	DMB (Dimmable Ballast for CFL. Add to Part No.)	For specs see pages 341-343.	
	For finish specs see pages 344-348.	ARN (Acorn globe)		HID (3) (High Intensity Discharge)		
		WGR (Wire guard)		MH (3) (5) (Metal Halide)		
		For specs and glass color see pages 321-344.		35/MH 50/MH 70/MH 100/MH 150/MH 175/MH		
				HPS (3) (5) (High Pressure Sodium)		
				50/HPS 70/HPS 100/HPS 150/HPS		
				LED 20W 30W	LED See specifications for complete part number.	LED See specifications for complete part number.

H-4111-B - 91 / CGU-CLR - 91 / 13/CFL - BCM - 1

ORDER EXAMPLE

(USE THIS FORMAT TO PLACE ORDER)

Notes:

- (1) H-4111-B available for 100W Max INC, 32W Max CFL and 100W Max HID and available with CGU and WGU glass enclosures.
H-4314-B and H-4316-B available for 200W Max INC, 57W Max CFL and 175W Max HID.
- (2) For interior finish of fixture refer to color chart on pages 344-348.
H- 4314-B and H-4316-B not available in copper finish.
- (3) Requires Globe Option (See pages 339-341 for Globe Options)
CGU and WGU Max Wattage 100W INC, 100W HID and 32W CFL.
LWGU, LCGU, ARN and LARN Max Wattage 200W INC, 175W HID and 57W CFL .
- (4) (RB) Remote ballast not available for Fluorescent Lamping.
- (5) Socket Bases: INC and HID are medium base, CFL are GX24Q.
Suitable for wet location.