





# HI-LITE MFG. CO., INC.

13450 Monte Vista Avenue  
Chino, California 91710  
Telephone: (909) 465-1999  
Fax: (909) 465-0907

Job Name: \_\_\_\_\_  
Type: \_\_\_\_\_  
Quantity: \_\_\_\_\_


## Radial Vapor Jar Collection

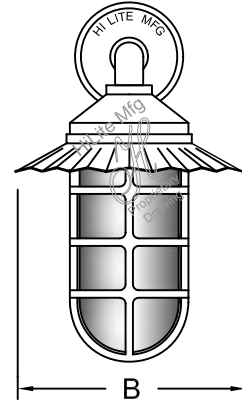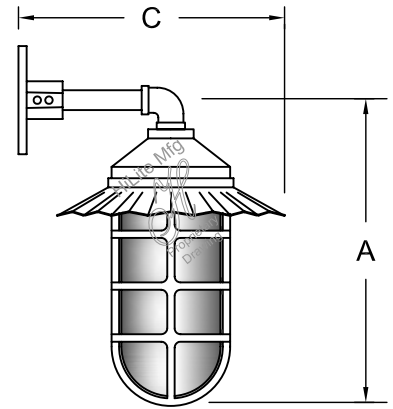

Item Number	Height (A)	Width (B)	Projection (C)
H-CGU-RS-8-1B	12"	8"	10"
H-CGU-RS-9-1B	12"	9 1/2"	10 1/2"
H-LCGU-RS-10-1B	13"	10"	11"
H-LCGU-RS-12-1B	13"	12"	14"

For Wall  
Mount Only

Fixture No.	Fixture Color	Glass Color	Wattage/Lamp options	Ballast	Voltage
<b>H-CGU-RS-8-1B<sup>(1)</sup></b>	Standard	<b>CLR</b> (Clear)	Incandescent <sup>(1) (4)</sup> (Fixture is standard 100W or 200W. Do not specify.)	Ballast option not available for INC.	Incandescent (Fixture is standard 120V. Do not specify.)
<b>H-CGU-RS-9-1B<sup>(1)</sup></b>	<b>91</b> (Black) <b>93</b> (White)	<b>RIB</b> (Clear Ribbed)	CFL <sup>(1) (4)</sup> (Compact Fluorescent)	<b>RB</b> <sup>(3)</sup> (Remote)	CFL <b>M</b> (Multi 120/277V)
<b>H-LCGU-RS-10-1B<sup>(1)</sup></b>	<b>95</b> (Dk. Grn) <b>96</b> (Galv.)	<b>FR</b> (Frost)	<b>13/CFL</b> <b>18/CFL</b> <b>26/32/42/CFL</b> <b>26/CFL</b> <b>32/CFL</b> <b>42/CFL</b> <b>57/CFL</b>	<b>BCM</b> (Canopy Mount)	HID RB and BCM <b>M</b> (Multi 120/208/240/277V)
<b>H-LCGU-RS-12-1B<sup>(1)</sup></b>	<b>BR47</b> (Rust) <b>BK01, GN20.</b>	<b>RD</b> (Red)	<b>DMB</b> (Dimmable Ballast for CFL. Add to Part No.)	For specs see pages 341-343.	
	Upgraded Finishes <sup>(2)</sup> <b>29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 98, 101, 102, 137, 138, 139, 140, 121, 122, 123, 124, 125, 126, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49.</b>	<b>BL</b> (Blue)	HID <sup>(1)</sup> (High Intensity Discharge)		
	For finish specs see pages 344-348.	<b>GRN</b> (Green)	MH <sup>(1) (4)</sup> (Metal Halide)		
		<b>AM</b> (Amber)	<b>35/MH</b> <b>50/MH</b> <b>70/MH</b> <b>100/MH</b> <b>150/MH</b> <b>175/MH</b>		
		<b>AMC</b> (Amber Crackle)	HPS <sup>(1) (4)</sup> (High Pressure Sodium)		
			<b>50/HPS</b> <b>70/HPS</b> <b>100/HPS</b> <b>150/HPS</b>		
			LED	LED	LED
			<b>20W</b> <b>30W</b>	See specifications for complete part number.	See specifications for complete part number.

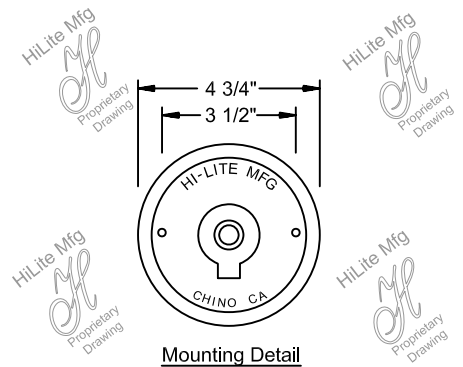

H-CGU-RS-8-1B - 91 - CLR / 13/CFL - BCM - M

### ORDER EXAMPLE

(USE THIS FORMAT TO PLACE ORDER)

#### Notes:

- (1) H-CGU-RS-8-1B and H-CGU-RS-9-1B available for 100W Max INC, 32W Max CFL and 100W Max HID. H-LCGU-RS-10-1B and H-LCGU-RS-12-1B available for 200W Max INC, 57W Max CFL and 175W Max HID. Above fixtures available with WGU wireguard.
- (2) Casting will be painted to match copper and brass finishes.
- (3) (RB) Remote Ballast not available for Fluorescent Lamping.
- (4) Socket Bases: INC and HID are medium base, CFL are GX24Q.

Suitable for wet location.