

CLEAR₂O Quick Start Card



Step 1 Identify Your Faucet

Identify and remove your faucet's aerator. If your faucet has an aerator, unscrew it as shown below in figure A1 and A2 (Your aerator may look different)

A1
OUTSIDE THREAD




A2
INSIDE THREAD



Important: The aerator has a rubber washer that can get stuck to the metal faucet. Be sure to remove rubber washer from the faucet.

Step 2 Your aerator installation kit includes :


• Clear₂O aerator • Two different sized adapters each with a rubber washer.

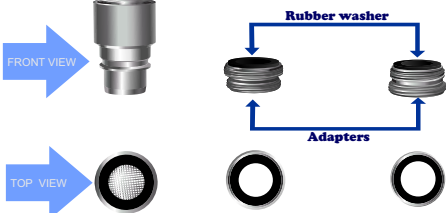

Step 3 Procedure Install CLEAR₂O aerator to your faucet.

Note: You will only need to use the CLEAR₂O aerator for this procedure.

Faucet with Outside Thread



Faucet with Inside Thread



Make sure the adapter has the rubber washer in place. If not, insert rubber washer into adapter.

Once you have the adapter that fits onto your faucet, screw onto faucet.

Tighten adapter in place.

Once adapter is secure, screw wide end of the CLEAR₂O aerator onto adapter with permanent rubber washer in place.

Never remove the rubber washers from the CLEAR₂O aerator.

Step 4 Ready to Attach Connector to Faucet



Grip connector with one hand and with free hand, push down outer ring.



Keeping outer ring in the down position, place connector under the faucet and push it up onto the faucet to fit securely in place.

Once in place, release outer ring to secure.

Important : To avoid damage to the faucet connector, you must push down the outer ring before pushing up the connector onto the faucet.

Step 5 Ready for Filtered Water



Turn faucet to cold water.

Important: You must use municipally treated / private well, potable water.

Never use hot water (above 85 °F)



Open the faucet enough so that water flows through the hose.

Important: To avoid overflow, do not use too much water pressure.

Fill the pitcher to the MAX line. Do not overfill.

Discard the first 3 pitchers of filtered water to flush the system.

Step 6



Once the pitcher is filled with desired amount of water, again push down outer ring and then pull down connector to disconnect from the faucet.

Wipe the quick connector hose to dry.



When finished, insert quick- connect hose into storage compartment.

Keep new faucet adapter attached in place.



Model No. CWX100

TIP: If you need a longer hose you can extend it by 18" with the CLEAR₂O Quick Connect Hose Extender.

Available on www.clear2o.com.

Step 7


Replacing the filter



Good for 40 Gallons
GREEN



Good for 10 more Gallons
YELLOW



Replace filter
RED

Your CLEAR₂O pitcher has an intelligent Filter indicator built into the filter cover that automatically activates to the flow meter indicator and resets it every time you install a new filter.

Making it easy to know exactly when to replace the filter.



To remove the filter, lift the lid and open the lid .

Turn the bar on the filter counter clockwise to the unlocked position. Keep turning the bar until filter is released.

Pull out the filter and discard.