

# CAPXM

Smart Video Intercom - M  
Section 28 13 00

DATA SHEET



## Key Features

Unit Interface Capabilities  
Scheduling Capabilities  
Radio Receiver  
Wireless Communication

Touchscreen/voice/PIN/card/transmitter/RFID tag  
Yes  
Included  
Yes\*\*

## Specifications

|   |   |
|---|---|
| Data Connectivity                               | Wi-Fi/cellular/wired high-speed internet/DSL                          |
| Voice Communication                             | Wi-Fi/cellular/wired high-speed internet/DSL                          |
| Calling Connectivity                            | VoIP (Phone.com)  |
| Power Supply                                    | 120VAC to 24VDC transformer (included)                                |
| Programming (Database Management)               | Cloud (myQ® Community)  |
| Remote Programming (Database Management)        | Yes   |
| Realtime Event Monitoring (Email Notifications) | Yes   |
| Software  | myQ Community   |
| Wiegand Input Data Format                       | 26 BIT, 30 BIT, 37 BIT (HID), 37 BIT (Transcore), AND 32 BIT (MiFare) |
| Wiegand Output Data Format                      | 26 BIT  |
| Local User Capacity Per Unit                    | 50,000  |
| Local Event History Per Unit                    | 50,000  |
| Max Number of Gates/Doors of Control (Each)     | 2   |
| Wiegand Input                                   | 2   |
| Relay Output                                    | 4 (2 primary, 2 auxiliary)  |
| Mounting Options                                | Surface/flush/gooseneck   |
| Operating Temperature                           | -20°F to 130°F (-29°C to 54°C)  |
| Display Type                                    | 7-inch full color touch screen with Picture-in-Picture                |
| Display Resolution                              | 720p high definition  |
| Integrated Video Camera                         | Yes   |
| Anti-Tamper Alarm                               | Yes   |
| Warranty  | 2 years   |

## Construction

Enclosure Material Cast Metal, Power Coated Black


**LiftMaster**

# CAPXM

DATA SHEET

Smart Video Intercom - M  
Section 28 13 00

## Dimensions

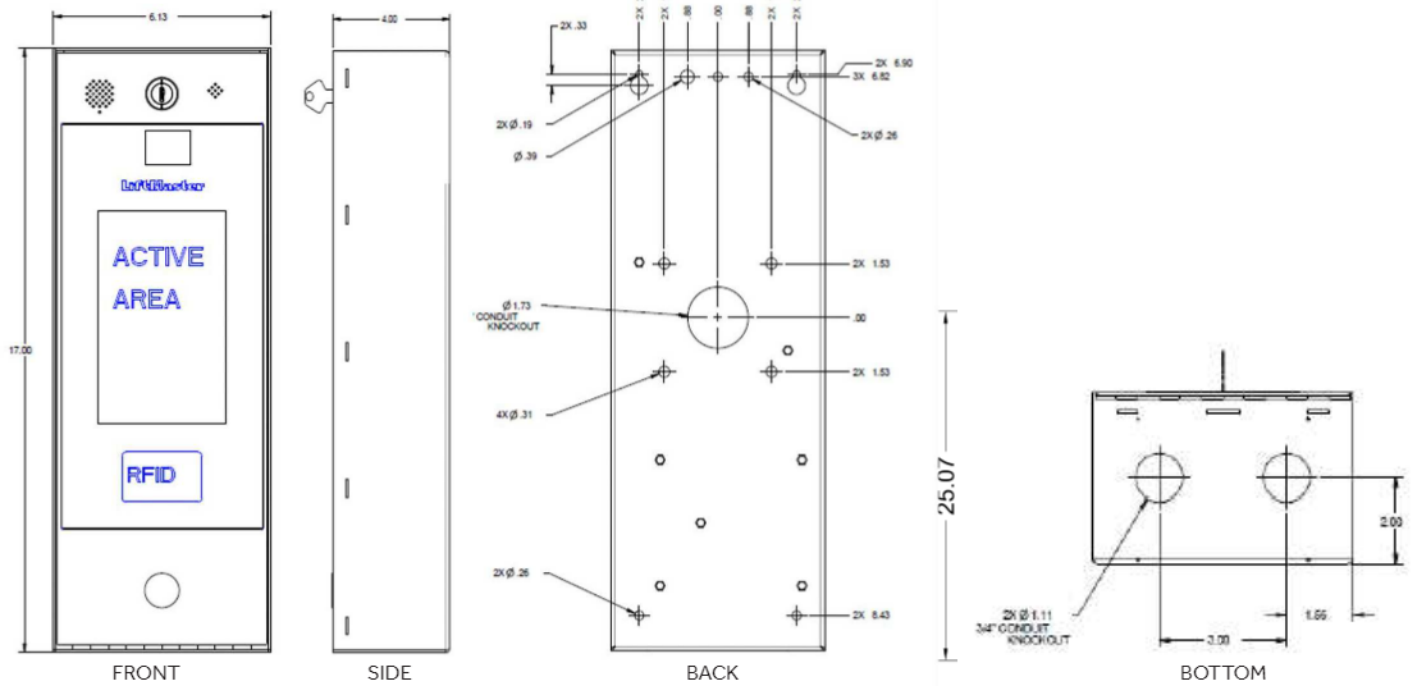

## Range

| CAPXM Feature   | Wired | Wireless | Wire Type   | Range   |
|---|-------|----------|---|---|
| Power 120VAC to 24VDC transformer (from outlet to controller) | x     |          | 2 wire (14 AWG)<br>2 wire (16 AWG)<br>2 wire (18 AWG) | Up to 300 ft.<br>Up to 200 ft.<br>Up to 100 ft. |
| Wiegand accessory wiring                                      | x     |          | 7 wire (18-22 AWG)                                    | Up to 500 ft.                                   |
| Relay output wiring   | x     |          | 2 wire (18-24 AWG)                                    | Up to 2500 ft.                                  |
| Exit Request (REX)  | x     |          | 2 wire (18-24 AWG)                                    | Up to 500 ft.                                   |
| Supervised Input  | x     |          | 2 wire (18-24 AWG)                                    | Up to 500 ft.                                   |
| RJ-45 Internet  | x     |          | CAT5e or better 8 strand (24 AWG)                     | Up to 328 ft.                                   |
| Wireless link to LiftMaster® Operators                        |       | x        | N/A   | Up to 750 ft.*                                  |
| Wi-Fi   |       | x        | N/A   | Up to 250 ft.**                                 |

\*When used with LiftMaster® Operators with Security +2.0® Radio

\*\*When used with LiftMaster® Gate Operator mfg. after Nov. 2017

© 2021 The Chamberlain Group, Inc. All Rights Reserved. myQ®, the myQ® logo, myQ® Community, LiftMaster, the LiftMaster logo, are registered trademarks of the Chamberlain Group, Inc. LiftMaster.com LMACENSCAPXM 5/21

**LiftMaster**