

PROXPLUS™ CARD READERS

ACCESS CONTROL



ProxPlus Secure
Model 1815-684
Mullion Mount



ProxPlus Secure
Model 1815-685
Single Gang Box Mount

Extremely High Security and Compatibility in One Card

ProxPlus Secure

- Reads only ProxPlus Secure cards which offer an extremely high level of encryption
- Output from reader is 26-bit Wiegand format
- 13.5 MHz frequency
- Three colors LED
- 5-Year limited factory warranty

*MIFARE® is a registered Trademark of NXP B.V.

CONDOMINIUM/RESIDENTS HALLS • GATED COMMUNITIES • COMMERCIAL/INDUSTRIAL • MIXED USE • PARKING • SELF STORAGE • MAXIMUM SECURITY



ProxPlus Secure Applications

are available for applications that require a higher level of security, providing a variety of security levels and clearances for vulnerable locations such as ports, schools, laboratories, utility facilities, airports, and more.



Card Scanner

Enables administrators to view card number of unlabeled cards, keeping security intact. (Optional Accessory)



Two Levels of Security

ProxPlus Secure cards and card readers include an encrypted unique identifier making the cards almost impossible to duplicate.




Functional Design

Card Readers come in two sizes to accommodate sizeable high-traffic access points and even small or awkward locations where wall space is at a premium.

ACCESS CONTROL SOLUTIONS




PROXPLUS™ CARD READERS ACCESS CONTROL

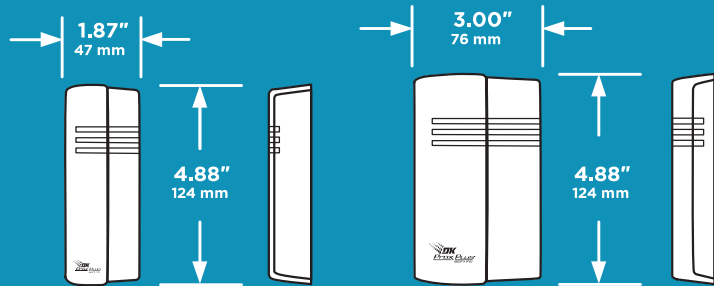

**ProxPlus Secure
Model 1815-684**
Mullion Mount

**ProxPlus Secure
Model 1815-685**
Single Gang Box Mount

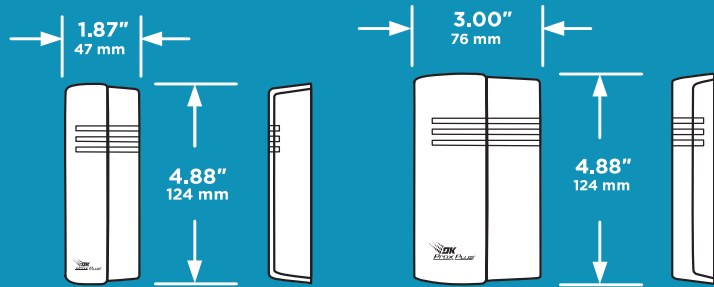

**Mifare Reader
Model 1815-680**
Mullion Mount

**Mifare Reader
Model 1815-681**
Single-Gang Mount

	PROXPLUS SECURE	
	1815-684	1815-685
APPLICATION	Where a higher degree of security is desired. Cards cannot be duplicated.	
OUTPUT	26-Bit Wiegand	26-Bit Wiegand
RANGE	Up to 1-inch	Up to 1-inch
INPUT POWER	12 VDC	12 VDC
LED / BEEPER	Yes	Yes
READER	DK ProxPlus Secure Cards Only	DK ProxPlus Secure Cards Only

TECHNICAL FEATURES

DK PROXPLUS SECURE READERS

ProxPlus Secure

1815-684; Up to 1-inch read range

1815-685; Up to 1-inch read range

These readers will read only DoorKing ProxPlus Secure cards and output the card code in a 26-Bit wiegand format. These readers offer higher security levels and are not compatible with Mifare 4 or 7 byte UID cards

DK PROXPLUS SECURE CARDS

Factory Coded Cards

These cards are factory pre-coded. Card numbers may or may not be in numerical sequence.

1508-252 Secure Cards

1508-257 Secure Key Tags

Custom Programmed Cards

These cards include sequential coding, specific card numbers and specific start / stop numbering sequences.

1508-250 Secure Cards

1508-255 Secure Key Tags

MIFARE READER

Use these readers only to match to existing Mifare Classic 4 or 7 byte UID cards that are already in use. The 1815-690 card scanner is required to identify the actual Wiegand card code so that it can be entered into the access controller.

Mifare Reader

1815-680; Up to 1-inch read range

1815-681; Up to 1-inch read range

CARD SCANNER

ProxPlus Secure Card Scanner

1815-692 Reads ProxPlus Secure Cards

Use this card scanner when the card code is not printed on the card or the code has worn off the card. This scanner will read ProxPlus Secure cards only.

Mifare Card Scanner

1815-690 Reads Mifare Cards

Because of the nature of how the UID code generates the 26-bit Wiegand code in Mifare readers, the card scanner MUST be used to ensure the correct Wiegand code is entered in the access controller.

Scanners require ProxPlus/Mifare card scanner software - free download at doorking.com.

ELECTRICAL

Input voltage / current

1815-680: 12 VDC - 200mA
 1815-681: 12 VDC - 200mA
 1815-684: 12 VDC - 200mA
 1815-685: 12 VDC - 200mA

3 color LED (Red, Yellow, Green), Piezo Beeper
 Output Format 26-bit wiegand

Operating Environment: -31°F to 149°F (-35°C to 65°C)

DoorKing® Inc.

Access Control Solutions since 1948



120 S. Glasgow Avenue,
 Inglewood, California 90301 U.S.A.
 Tel: 310-645-0023 FAX: 310-641-1586
 www.doorking.com

© 2022 All Rights Reserved.
 Product specifications may
 change without notice. Rev. 3/22



MEMBER:



DISTRIBUTED BY:

