


//////
X-390 SWING GATE
OPERATOR



RESIDENTIAL AND COMMERCIAL
CLASS I, II, III, & IV VEHICULAR SWING GATE OPERATOR

EASY ACCESS TO
LIMIT SWITCHES

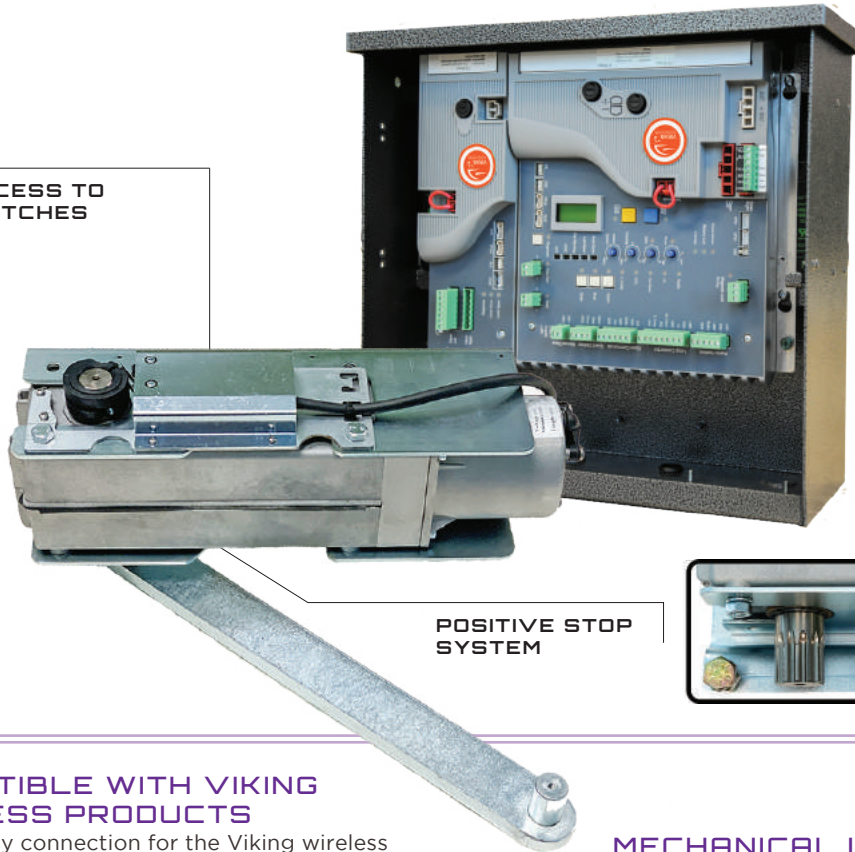

POSITIVE STOP
SYSTEM



COMPATIBLE WITH VIKING WIRELESS PRODUCTS

- Plug & Play connection for the Viking wireless expansion products.
- Viking Konnect - Wireless Kit provides secure and reliable wireless communication when the application requires two single ECUs.
- Viking Monitor - Remote access to the control board settings, operator diagnostics, controls, gate status and error notifications, all from the convenience of a computer or any compatible hand held device.

BATTERY BACKUP INCLUDED

- Standard Battery Backup provides 400 continuous cycles at 100% duty cycle.
- With Viking's "True" Battery Backup System, batteries are not used during normal operations, maximizing battery life.

LIGHTNING PROTECTION

- Advanced lightning strike protection up to 20,000 volts / 10,000 amps
- On-board surge protection monitoring.

MECHANICAL LIMITS

- Allows for easy adjustment of the limits and reliable operation

INTEGRATED HEATER

- Built-in heater for operating temperatures down to -20° F.
- This will allow you run your operator in the coldest conditions.

SOLAR SMART

- Power Saving technology minimizes current draw while at standby.

DIAGNOSTICS DISPLAY

- On-board LCD screen displays voltages, amps, gate status and diagnostics.

LARGE BOX OPTION

- A bigger box option that fits up to (2) 35 amp hour batteries is available

Operational Voltage 24 VDC

Main Power Source Options 120/240 VAC Single Phase

Max Torque 184 lb-ft (250 Nm)

Battery 12VDC x 2 / Up to 400 Full Contin. Cycles

Operating Speed 10-13 seconds per 90°

Operating Temperature -20°F up to +131°F

Max Gate Capacity 600 lbs/ 14'

Max Duty Cycle 100% Contin. Cycle