


DATA SERIES ICON DATA HPL

RECOMMENDED APPLICATIONS



DATA CENTRES SERVER ROOMS

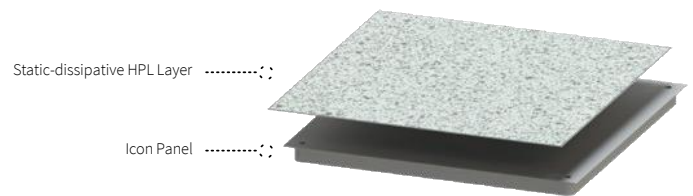

SYSTEM NAME

Icon Data HPL Super Heavy Industrial Grade 2500LBS (11.12kN)

DESCRIPTION

Icon Data HPL is a finished system designed for Computer and Data Centre environments. It can be used for mapping and distributing cabling, data and other electrical services in the sub-floor.

The Icon Data HPL system has a 0.06in thick anti-static High-Pressure Laminate covering. The HPL protects against voltage shorts that can occur with electrical equipment and creates an electrostatic discharge to help prevent buildup of the static electricity which could damage equipment.

COMPLIANT STANDARDS

CISCA 2007
ISO9239-1-2003
EN12825-2001
DIN4102-1-1998

CORE Cementitious Compound

FINISH Anti-static 0.06in 'high pressure laminate' surface finish.

CONSTRUCTION

The panels consist of a hardened steel top and bottom sheet plate with corrosion resistant protection, inside and out, encapsulating a structural cementitious core.

TOLERANCE

±0.001in and a flatness tolerance of ±0.02in measured on a diagonal across the top of the panel

CONNECTION

The panel is gravity held on top of the stringer assembly.

SIZE 24in x 24in

DEPTH 1.4in

PERFORMANCE TO STANDARDS GUIDE PER CISCA STANDARD 2007

Load Level	Panel (kg)	System (kg/m ² at 17.7in FFH)
2500LBS (11.12kN) Industrial Grade	21.23	67.65
STATIC PERFORMANCE (kN)		
Concentrated	Impact	Ultimate
2500LBS (11.12kN)	150LBS (0.67kN)	10,800LBS (48.1kN)
DYNAMIC PERFORMANCE (kN) - Passes		
10 passes (wheel size 3in x 1.2in)	10,000 passes (wheel size 6in x 2in)	Uniform (kN/m ²)
2000LBS (8.89kN)	1600LBS (7.11kN)	58.3
Safety Factor: Panels must provide a minimum safety factor of five (5) times the uniform load specified above in accordance with CISCA Standard ICC-ES.		



PEDESTAL SIZE

4in x 4in base plate

PEDESTAL CONSTRUCTION

Hot dipped galvanised steel pedestal base, head and rod. Finished with an ABS locating gasket.

PEDESTAL LOCKING

The pedestals will be provided with an adjusting and locking nut to maintain the assembly at a selected height, which requires a deliberate action to change the height setting, and which prevents vibration displacement.

PEDESTAL FINISH

Hot dipped galvanized finish.

PEDESTAL CONNECTION

The panel is gravity held on top of the stringer assembly.

PEDESTAL FINISHED FLOOR HEIGHT (FFH)

The finished floor height of the access floor is measured from the sub floor to the top surface of the installed access floor.

STRINGER SIZE

1.2in x 0.8in x 0.05in x 24in

STRINGER CONSTRUCTION

Rectangular steel welded tube with 0.06in sponge rubber foam.

STRINGER FINISH

Hot dipped galvanized finish.

STRINGER CONNECTION

The stringer is screw fixed to the pedestal head.

PERFORMANCE OF SURFACE FINISH

PROPERTIES	REQUIREMENT IN NEMA LD3-2005 HGS	RESULT
Light Resistance	Rating Min: SL	Pass
Cleanability	Cleanability Rating: ≤20	Pass Cleanability Rating: 10
Boiling water resistance	No effect	Pass No effect
High temperature resistance	Slight effect	Pass No effect
Ball impact resistance	≥49.2in	Pass >79in
Dart impact resistance	≥20in	Pass >39.5in
Dimensional change	X-direction: ≤0.8%	Pass X-direction: 0.58%
	Y-direction: ≤0.5%	Pass Y-direction: 0.35%
Room temperature dimensional stability	X-direction: ≤0.8%	Pass X-direction: 0.38%
	Y-direction: ≤0.5%	Pass Y-direction: 0.35%
Wear resistance	≥400r	Pass >6000r
Dry Floor Friction Test per AS/NZS 4586:2004		Class F
Wet Pendulum Test per AS/NZS 4586:2004		Class X
Oil-Wet Ramp Test per AS/NZS 4586:2004		R9


CARE & MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and dry mopping. Damp mopping with using a neutral cleanser, more intense cleaning should be carried out using a neutral cleanser. Harsh chemicals can affect the adhesive layer between the HPL and Icon Panel.

Maintain temperatures during and after installation to between 15 and 32 degrees Celsius, with a relative humidity between 40-60%. Avoid extreme changes in temperature and humidity.

It is recommended that plywood protection is used for all rolling loads over the access floor finish.

ICON Data HPL Colour Hub

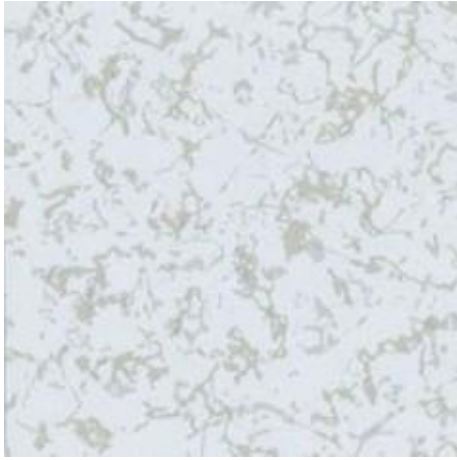

VENTUS (8192)



SOLIS (2010-5)



STELLA (2103)



TERRA (2158)

*Colours are subject to availability and minimum order quantities may apply.