



Finish: Anthracite

**Read these instructions before commencing installation & retain them for future reference.**

**IP54** **240V 8.5W**

**Important Information**

It is recommended that luminaires are installed by a qualified electrician. The installation of this product must comply with the current edition of the IEE wiring regulations BS7671. These products are designed for connection to a 240V 50Hz supply. Any damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a poor installation.



**Important User Advice**

Always safely isolate the mains supply before installation or servicing. KSR recommends a maintenance schedule of washing with soapy water no abrasives and re-greasing screws at least quarterly.

**Installation Details**

Safely isolate the mains supply.  
 Remove and retain the two screws from the sides of the bollard to release the baseplate.  
 Pass the mains supply cable through the grommet in the baseplate ensuring a good watertight seal.  
 This luminaire is not suitable for looping through.  
 Fix the baseplate to the surface using suitable fixings.  
 Remove the rubber seal from the termination box.  
 Pass the mains supply cable through the grommet in the termination box ensuring a good watertight seal.  
 Connect the mains supply to the terminal block following the marking on the block and/or the guide in Fig.1 as below.  
 Refit the rubber seal on the termination box.  
 Install the bollard on the baseplate and secure using the two retained screws.  
 (KSR recommends using a suitable water repellent grease on the screws).  
 Switch on the mains supply and test.

Fig.1

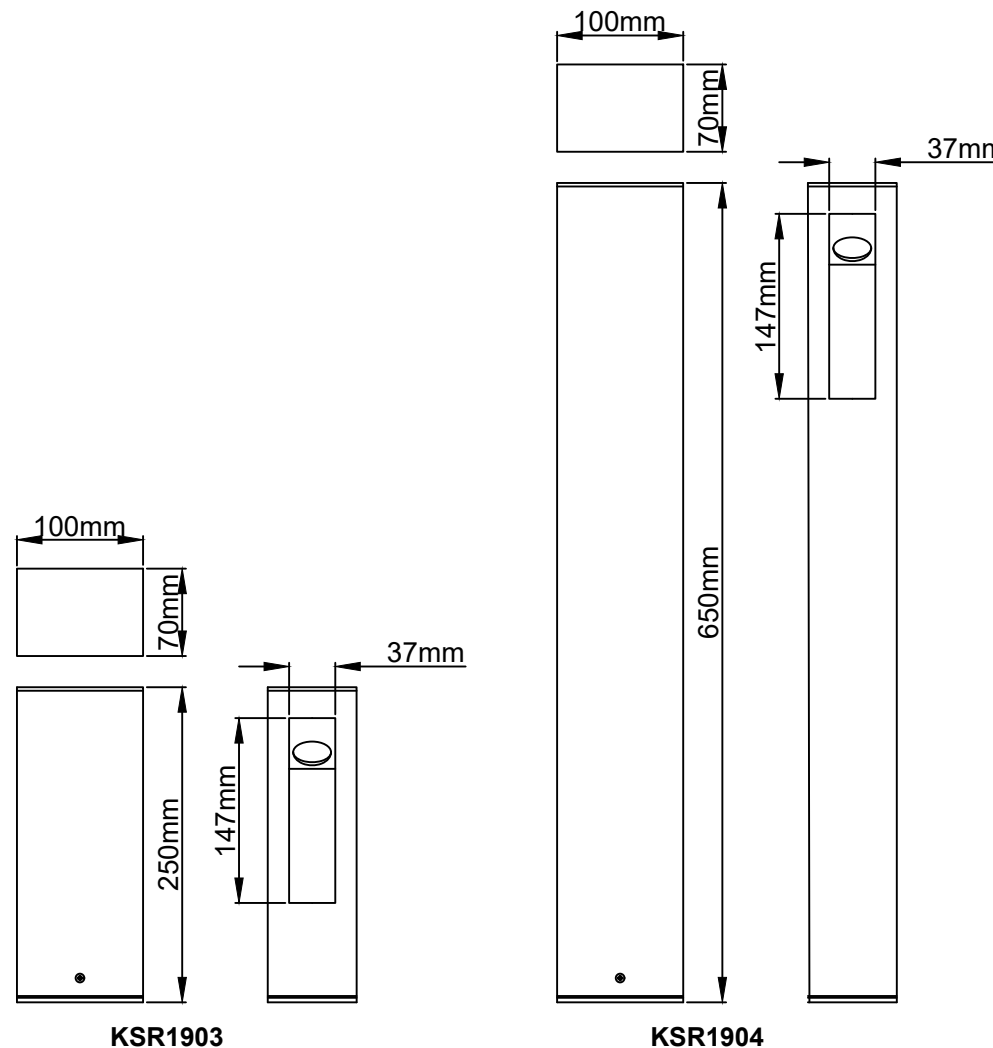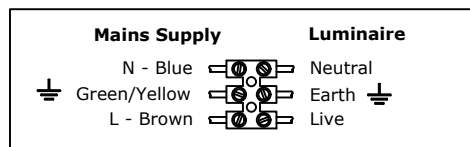

KSR1903

KSR1904

**Lamp Details**

Light Source: Non-replaceable LED  
 Wattage: 8.5W  
 Lumens: 75  
 Colour: 3000K  
 CRI: Ra68



KSR Lighting Aftersales: 023 92 674343  
 E-mail: aftersales@ksrlighting.com