



Finish: Anthracite

Read these instructions before commencing installation & retain them for future reference.

IP54 **240V 13W**

Important Information

It is recommended that luminaires are installed by a qualified electrician. The installation of this product must comply with the current edition of the IEE wiring regulations BS7671. These products are designed for connection to a 240V 50Hz supply. Any damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a poor installation.



Important User Advice

Always safely isolate the mains supply before installation or servicing. KSR recommends a maintenance schedule of washing with soapy water no abrasives and re-greasing screws at least quarterly.

Installation Details

Safely isolate the mains supply.
 Loosen the four hex screws from the four sides of the bollard to release the base assembly.
 Remove and retain the 2 screws from the base assembly and remove the base plate.
 Pass the mains supply cable through the grommet in the baseplate ensuring a good watertight seal.
 This luminaire is not suitable for looping through.
 Fix the baseplate to the surface using suitable fixings.
 Pass the mains supply cable through the grommet in the top baseplate ensuring a good watertight seal.
 Connect the mains supply to the terminal block following the marking on the block and/or the guide in Fig.1 as below.
 Re-fit the top baseplate back onto the baseplate using the retained screws.
 (KSR recommends using a suitable water repellent grease on the screws).
 Install the bollard on the base assembly and secure using the four hex screws. (KSR recommends using a suitable water repellent grease on the screws).
 Switch on the mains supply and test.

Fig.1

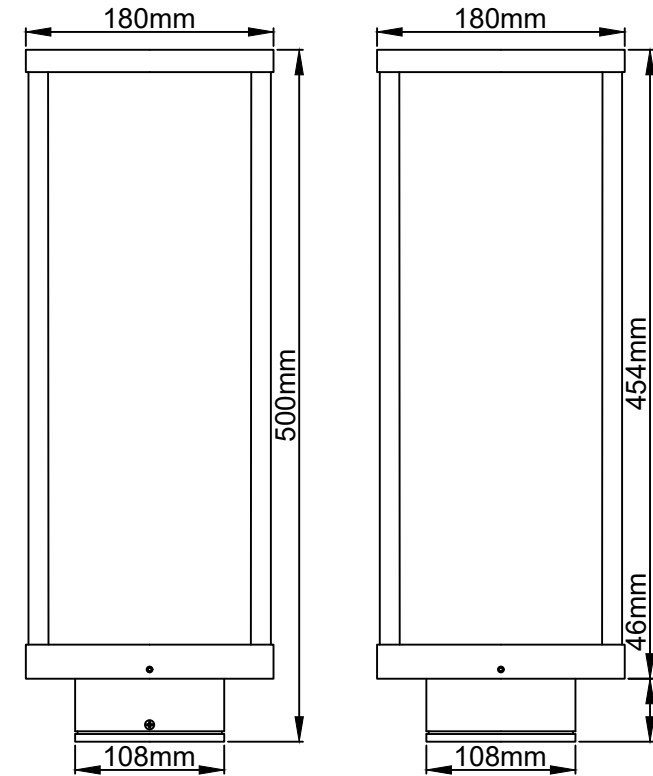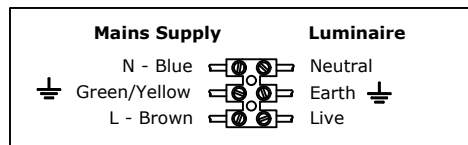

KSR1912

Lamp Details

Light Source: Non-replaceable LED
 Wattage: 13W
 Lumens: 1075
 Colour: 3000K
 CRI: Ra83

KSR Lighting Aftersales: 023 92 674343
 E-mail: aftersales@ksrlighting.com

