



Product Information

The Viella Bollard Range are ideal for path lighting and accenting for commercial and domestic applications.

Supplied with an anthracite finish and Bronze inlay it has modern appearance for a more high-end look.

Complete with a 2 year warranty



Product Features

- 2 year warranty
- IP54
- Class I
- Supplied in 3000K as standard
- 28° emitting beam angle
- CREE LED technology
- Strong Cast Aluminium Body
- Life Expectancy up to 40,000hrs

Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (Im)	CRI (Ra)	Energy Efficiency Class	Protection Class
KSR1903	Viella 8.5w LED 250mm Bollard	8.5w	3000	75	68 (due to copper reflector)	A+	1
KSR1904	Viella 8.5w LED 650mm Bollard	8.5w	3000	75	68 (due to copper reflector)	A+	I

Nominal voltage	100~240VAC		
Operating frequency	50/60Hz		
Circuit Wattage	7w Cree LED		
Circuit Current	ТВС		
Driver mA Rating	ТВС		
PFC	0.52		
In Rush Current	ТВС		
Ambient temperature range	-20°c to +40°c		
IP rating	54		

Construction

Body: Cast Aluminium Lens: Clear Polycarbonate

Standards

BSEN60598-1:2015 Luminaires – Part 1: General requirements and tests


In Conformity with

LVD Low voltage directive 2014/35/EU


EMC Electromagnetic compatibility directive 2014/30/EU ERP Energy related products directive 2009/125/EC RoHS Restriction of hazardous substances 2011/65/EU

Product Dimensions

KSR1903



KSR1904

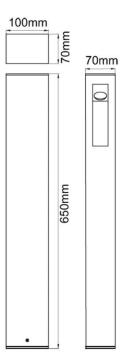

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.