


GreenPerform Highbay II 飞利浦LED高天棚灯(可调光)

BY688P PSD/BY689P PSR

Mounting instruction / 安装说明书


4441 000 87071



产品名称 Description	色温 Color	配光 Optics	重量 Weight	系统功率 Wattage
BY688P LED I40/CW PSD WB	CW	WB	7kg	140W
BY688P LED I40/CW PSD NB		NB		
BY688P LED I40/NW PSD WB	NW	WB		
BY688P LED I40/NW PSD NB		NB		
BY688P LED I40/CW PSR WB	CW	WB		
BY688P LED I40/CW PSR NB		NB		
BY688P LED I40/NW PSR WB	NW	WB		
BY688P LED I40/NW PSR NB		NB		

Dimensions 尺寸

Type 型号	Dimension 尺寸(mm)		
	D	W	H
BY688P PSD	Φ457	466	158
BY688P PSU	Φ457	466	158

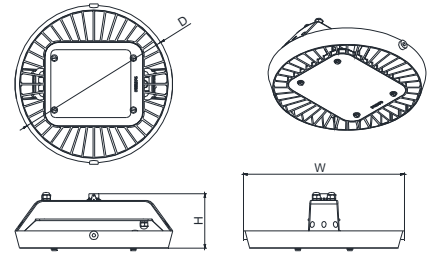


安装附件/Mounting accessories



- 挂钩组件/Mounting hook
 - Hook
- 支架组件/Mounting bracket
 - BY618Z MB
 - BY619Z MB

1 Installation 安装应用

Hook mounting/吊装




Pipe mounting/杆装

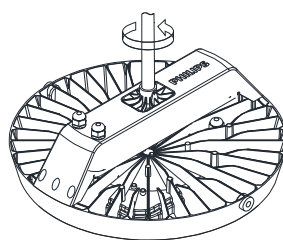


Pipe dim.
铁管尺寸

Bracket mounting/支架安装



- D10 平垫圈
D10 washer
- D10 齿形垫圈
D10 tooth washer
- D10 弹簧垫圈
D10 Spring washer



Mounting hole
安装孔位

- M10x20 螺栓
M10x20 bolt
- 支架
Bracket

DETAIL A

2 Connect entry cable

Please use IP65 or above waterproof terminal block, it is not provided by Philips.

连接电源线

请使用IP65以上的接线盒(接线端子尺寸不小于10x20x25mm),飞利浦不提供接线盒。

Cable/外部接线:

- 60227IEC53 3x1.0~1.5mm²
- 60245IEC57 3x1.0~1.5mm²

外部3芯线定义如下:

- 棕Brown - L
- 黄绿YellowGreen - G
- 蓝Blue - N

外部2芯线定义如下:

- 棕Brown - DALI+ / I⁺10V+
- 蓝Blue - DALI- / I⁻10V-



1、The luminaire shall be installed or maintained By a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.

灯具应由有资格的电工安装或维修,接线要符合IEE 电气标准或国家标准。

2、The luminaire shall ,under no circumstance,be covered with insulation matting or similar material.

灯具不适合被隔热或类似材料覆盖。

3、The cable of the luminaire should use "Y" type connection. It should be maintained by professional electrician.

灯具电源线使用Y型连接,电源线损坏需专业人士更换。