



**LEDVANCE**

**LED VALUE  
LINKABLE BATTEN**



# LINKABLE BATTEN

The LED Linkable Batten is a super slim, lightweight design with an integral driver. With a polycarbonate body and opal diffuser, this batten offers homogeneous light distribution with low power consumption. Perfect for applications within shops, shelving and under cabinets.



## FEATURES AND BENEFITS

- 6.5W, 13W
- Available in 600mm and 1200mm
- Single colour in 4000K and 6500K
- High efficacy up to 100lm/W
- Beam angle 100°
- IP20
- Pre-wired with flex and plug
- Housing material polycarbonate
- Lifetime 15000 hours

## AREAS OF APPLICATION

- Reception areas and foyers
- Garages
- Corridors, stairways, and entrance areas
- Entrances and hallways
- Retail and hospitality

**Distributed by:**  
Reduction Revolution Pty Ltd  
[www.reductionrevolution.com.au/LED](http://www.reductionrevolution.com.au/LED)

## AVAILABLE SIZES



6.5W  
580x20x31mm




13W  
1180x20x31mm

## SPECIFICATIONS


<b>Wattage</b>	6.5W, 13W	<b>Connection Type</b>	1.5m power cable, 265mm connection cable
<b>Lumens</b>	650, 1300		Max connections: 6.5W Batten 15 pcs, 13W Batten 8 pcs, or <104W mixed lengths
<b>lm/W</b>	100	<b>PF</b>	>0.5
<b>CCT</b>	4000K, 6500K	<b>Frequency</b>	50/60Hz
<b>IP Rating</b>	IP20	<b>Mounting Type</b>	Surface mounting
<b>Housing Material</b>	Polycarbonate	<b>Operating Temperature</b>	-10°C to 40°C
<b>Beam Angle</b>	100°	<b>Lifetime</b>	15000 hours
<b>CRI</b>	>80	<b>Warranty</b>	2 years
<b>SDCM</b>	<6		
<b>Electrical Classification</b>	Class II		

## PHOTOMETRICS

(Example of LDWALBAT2FT840G3)

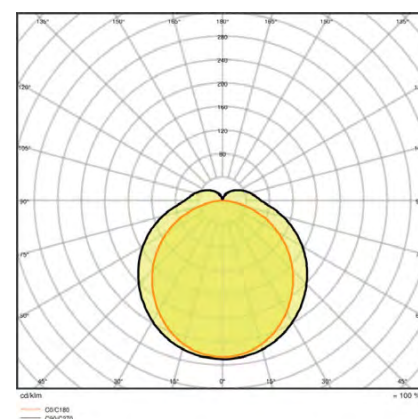

## DIMENSIONS

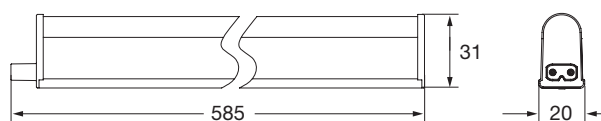

6.5W  
580x20x31mm



13W  
1180x20x31mm

Power cable and connection cable included in package  
Length of power cable 1.5m  
Length of connection cable 265mm  
Max connections 6.5W - 15pcs, 13W - 8 pcs, or <104W mixed lengths

## ORDERING CODES - LINKABLE BATTEN



Product name	EAN10	Model number	W	lm	K	$\Delta^{\circ}$	lm/w	$\curvearrowright$	L (mm)	w (mm)	h (mm)	
--------------	-------	--------------	---	----	---	------------------	------	--------------------	--------	--------	--------	--

## LINKABLE BATTEN

LDVAL BAT 600 6.5W 4000K 30X1 G4AU LEDV	<b>4099854114991</b>	LDWVALBAT2FT840G4	6.5	650	4000	120	100	×	585	20	31	150
LDVAL BAT 600 6.5W 6500K 30X1 G4AU LEDV	<b>4099854115011</b>	LDWVALBAT2FT865G4	6.5	650	6500	120	100	×	585	20	31	150
LDVAL BAT 1200 13W 4000K 30X1 G4AU LEDV	<b>4099854115059</b>	LDWVALBAT4FT840G4	13	1300	4000	120	100	×	1185	20	31	290
LDVAL BAT 1200 13W 6500K 30X1 G4AU LEDV	<b>4099854115073</b>	LDWVALBAT4FT865G4	13	1300	6500	120	100	×	1185	20	31	290