



# SmartBright Lumen & Colour Select Waterproof

Real professionals choose **Philips SmartBright** for their everyday lighting installations.

## Trusted performance, everyday.

The SmartBright Lumen and Colour Selectable Waterproof Batten offers unparalleled flexibility making it suitable for any application.

Colour Selectable in either 4000, 5000 or 6500K and Lumen selectable from 60% to 100% output. Now in slim and wide varieties makes this the only waterproof batten you need for almost any application.

### **Features and benefits**

- ✓ High Efficiency, up to 120lm/W
- ✓ Long lifetime, 50,000 hrs and 5 yr warranty as standard
- ✓ Robust polycarbonate design
- ✓ Wide base option for direct replacement of T8 luminaires

# **Product highlights**









### **Applications**

- ✓ Warehouses
- ✓ Wet areas
- ✓ Car parks
- ✓ Factories

✓ Garages

Distributed by:


Reduction Revolution Pty Ltd

www.reductionrevolution.com.au/LED

### **Product data**

|                       | SmartBright Lumen & Colour Select Waterproof Batten |               |  |  |  |
|-----------------------|---|---------------|--|--|--|
| Size                  | 600mm   | 1,200mm       |  |  |  |
| Lumen (lm) Output     | 1265 / 2000   | 2000 / 4000   |  |  |  |
| Wattage (W)           | 10 / 18   | 20 /36        |  |  |  |
| Surge Protection      | 2kV   |               |  |  |  |
| Safety Class          | Class 2   |               |  |  |  |
| Beam Angle            | Wide beam   |               |  |  |  |
| ССТ                   | Dip Switch Selectable 4000K / 5000K / 6500K         |               |  |  |  |
| CRI                   | > 80  |               |  |  |  |
| IP/IK Rating          | IP65 / IK08   |               |  |  |  |
| Lifetime              | 50,000 hrs / 5 yr warranty                          |               |  |  |  |
| Operating Temperature | -20°C to + 40°C                                     |               |  |  |  |
| Connection            | Screw Terminals                                     |               |  |  |  |
| Material & Finish     | Polycark  | Polycarbonate |  |  |  |

## **Dimensions**

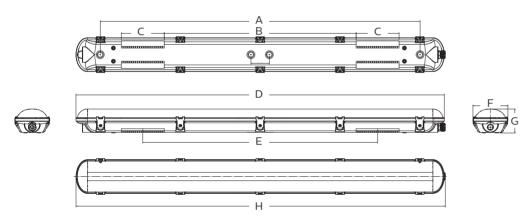

| Model                              | A<br>(mm) | B<br>(mm) | C<br>(mm) | D<br>(mm) | E<br>(mm) | F<br>(mm) | G<br>(mm) | H<br>(mm) |
|------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| WT071C LED SWT/SCCT L600 PSU Slim  | 452       | 180.5     | 99.5      | 600       | 280       | 90        | 78        | 607       |
| WT071C LED SWT/SCCT L1200 PSU Slim | 1,055     | 625       | 140       | 1,200     | 765       | 90        | 78        | 1,207     |
| WT072C LED SWT/SCCT L600 PSU Wide  | 440       | 180.5     | 99.5      | 600       | 280       | 115       | 80        | 607       |
| WT072C LED SWT/SCCT L1200 PSU Wide | 1,040     | 625       | 140       | 1,200     | 765       | 115       | 80        | 1,207     |

# **Ordering Information**

| Specification  |                                    | Part Number  | Short Code     |
|--|------------------------------------|--------------|----------------|
| 11/18W, 1265/2000lm, 4000K/5000/6500K, 600mm <b>SLIM</b>   | WT071C LED SWT/SCCT L600 PSU Slim  | 911401801984 | WT071CS600CCT  |
| 20/36W, 2400/4000lm, 4000K/5000/6500K, 1,200mm <b>SLIM</b> | WT071C LED SWT/SCCT L1200 PSU Slim | 911401802084 | WT071CS1200CCT |
| 11/18W, 1265/2000lm, 4000K/5000/6500K, 600mm <b>WIDE</b>   | WT072C LED SWT/SCCT L600 PSU Wide  | 911401802284 | WT072CW600CCT  |
| 20/36W, 2400/4000lm, 4000K/5000/6500K, 1,200mm <b>WIDE</b> | WT072C LED SWT/SCCT L1200 PSU Wide | 911401802384 | WT072CW1200CCT |