

# LED AR111 G53 10.0W-75W D 4000K 25D 735lm

## 4000K Neutral White 735 LM DIM

- G53 Socket
- 12 AC/DCV
- 50.000 hours Lifetime
- Dimmable
- 87% Energy Saving
- Luminous Flux: 735 lm
- Equivalent to 75W incandescent bulb




<b>Product Number</b>	<b>52344</b>
<b>General Data</b>	
Lamp Socket	G53
Design	AR111
<b>Electric Data</b>	
Wattage (W)	10.0
Wattage Equivalent (W)	75
Voltage (V)	12V AC/DC
Dimmable	yes
Power Factor	0.90
Operating Frequency (Hz)	50/60
<b>Geometric Data</b>	
Length (mm)	58
Diameter (mm)	111
Weight (g)	90
<b>Photometric Data</b>	
Luminous Flux (lm)	735
CRI	90
CCT (K)	4000
Luminous Intensity (cd)	2500
Beam Angle (°)	25
Luminous Efficacy (lm/W)	75
Lifetime (hrs)	50.000
Switching Cycle	100.000
Operating Temperature	-20°C to 40°C



**Distributed by:**  
Reduction Revolution Pty Ltd  
[www.reductionrevolution.com.au](http://www.reductionrevolution.com.au)


### Photometric Diagrams

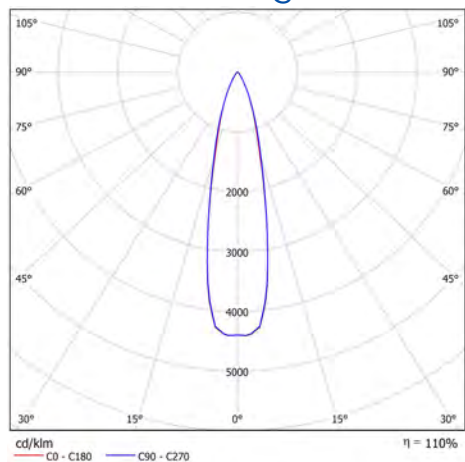

Distance [m]	Cone Diameter [m]	E(0°)	E(C90)	E(CD)	Illuminance [lx]
0.5	0.21	13656	12.1°	6471	6482
	0.21		12.0°	6482	
1.0	0.43	3414	12.1°	1618	1620
	0.43		12.0°	1620	
1.5	0.64	1517	12.1°	719	720
	0.64		12.0°	720	
2.0	0.86	853	12.1°	404	405
	0.85		12.0°	405	
2.5	1.07	546	12.1°	259	259
	1.06		12.0°	259	
3.0	1.29	379	12.1°	180	180
	1.28		12.0°	180	

Distance [m] Cone Diameter [m] Illuminance [lx]  
 — CD - C180 (Half-value Angle: 24.0°)  
 — C90 - C270 (Half-value Angle: 24.2°)

### Energy Rating

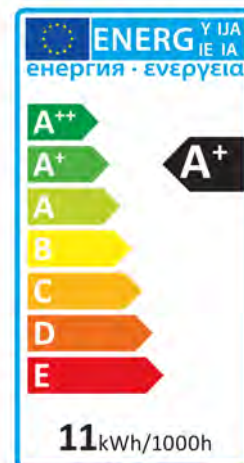

### Technical Packaging Details

**Barcode**

0023942523444

**EAN 128**

(02)00023942523444(37)12(91)814

**EAN 14**

50023942523449

**Pack Dimensions(HxWxL)**

68 x 125 x 125mm (mm)

**Pack Weight**

150g (g)

**MOQ**

1

**Carton Dimensions (HxWxL)**

225 x 275 x 270mm (mm)

**Cartons/Pallet**

32

**Layers/Pallet**

4

**Units/Pallet**

384

**Distributed by:**

Reduction Revolution Pty Ltd

www.reductionrevolution.com.au