

- IP65 rated for outdoor installation, suitable for outdoor installation
- Slim design, only 28mm thick
- Easy Installation
- Dedicated power cord outlet and power cord outlet stopper provided
- Wide input voltage range, 100-277V
- Long lifespan and little maintenances required
- More than 50% power saving compared to fluorescent tube
- Lifetime of 40,000 hrs



Order Code 65053

General Data

Filter Design Frosted PMMA

Geometric Data

Thickness (mm) 28mm

Length (mm) 1210mm

Weight (g) 770g

Electric Data

Wattage 42W

Voltage 100-277 V AC

Current 480mA (primary @ 230V Input)

Power Factor 0.90

Operating Frequency 50/60 Hz

Photometric Data

Luminous Flux (lm) 3600


CRI Typ.80

CCT 5000 K – cool white


Luminous Intensity (cd) 1260

Beam Angle (°) 110°

Lifetime (L70) 40,000 hrs



Polar intensity diagram

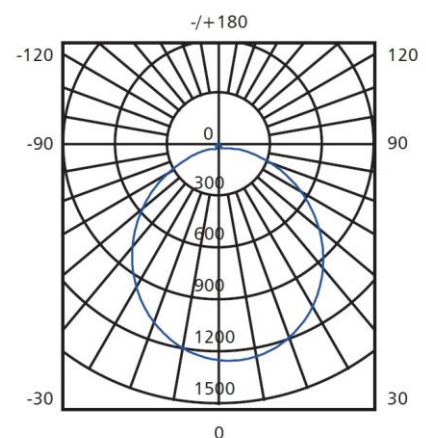

UNIT: cd
AVERAGE BEAM ANGLE(50%): 108.6 DEG





Order Code	65053
Product Description	Verbatim LED IP65 Linear Batten 42W 5000K 1200mm Outdoor

Technical Packaging Details

Giftbox Barcode	6943760250534
Outer Carton Barcode	26943760250538
Inner Carton Barcode	16943760250531
Pack Dimensions (HxWxL)	1238mmx86.5mmx40mm
Pack Weight	1000g
Carton Qty (Shipping Unit)	25
Carton Dimensions (HxWxL)	1290mmx480mmx250mm
Cartons/Layer	2
Layers/Pallet	3
Units/Pallet	150

Distributed by:

Reduction Revolution Pty Ltd
www.reductionrevolution.com.au