

- High lumen output : 480lm
- Lifetime of 20,000 hrs
- Ideal for accent lighting in hotels, hospitals, shops, restaurants or museums
- 36° beam angle
- 90% Energy saving
- Compatible to Clipsal leading/universal/trailing edge dimmers
- Switching cycle 100,000 times



Order Code 65110

**General Data**

Lamp Socket GU10

Design Lens

**Geometric Data**

Length (mm) 54.0

Diameter (mm) 50.0

Weight (g) 40

**Electric Data**

Wattage 6.5 W

Voltage 220-240 V AC/DC

Power Factor ≥0.80

Operating Frequency 50/60 Hz

**Photometric Data**

Luminous Flux (lm) 480

90° cone lumen (lm) 465

CRI ≥80




CCT 3000 K – warm white

Luminous Intensity (cd) 1000

Beam Angle (°) 36°

Lifetime 20,000 hrs

**Equivalent to (W)** 66 W

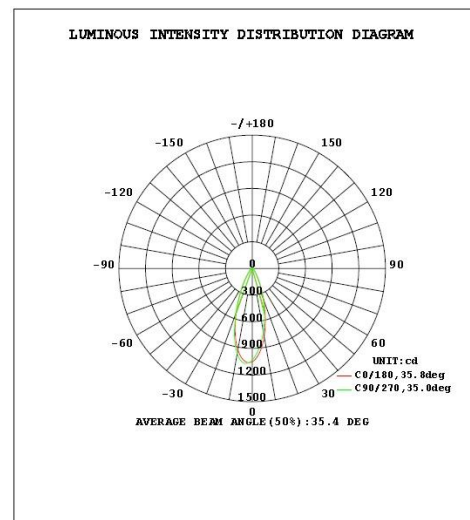



<b>Order Code</b>	65110
<b>Product Description</b>	LED PAR16 GU10 6.5W 36 deg 3000K WW 220-240V Dimmable

### Technical Packaging Details

Giftbox Barcode	6943760251104
Outer Carton Barcode	16943760251101
Inner Carton Barcode	26943760251108
Pack Dimensions (HxWxL)	69 mm x 51 mm x 51 mm
Pack Weight	50g
Carton Qty (Shipping Unit)	10
Carton Dimensions (HxWxL)	80 mm x 115 mm x 270 mm
Cartons/Layer	24
Layers/Pallet	10
Units/Pallet	2400