


D6



Dimensions

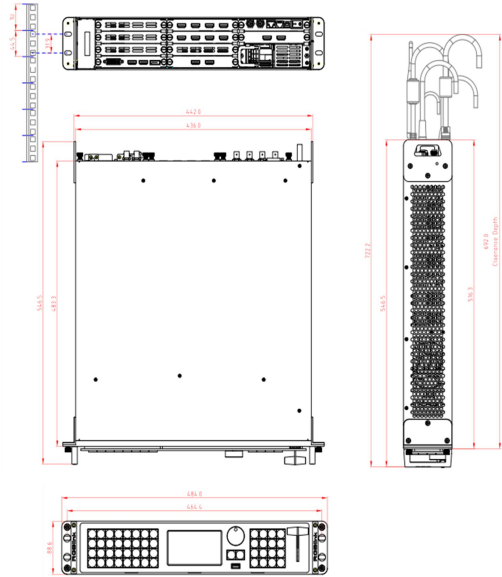

Key Features

- Internal 4:4:4 processing
- HDR Compliance
- HDMI 2.0 / DP 1.2/ HDMI 1.4/ Dual Link DVI inputs Compatible
- 12G/6G/3G/HD/SD SDI inputs Compatible
- HDMI 2.0 output
- 12G/6G/3G/HD/SD SDI outputs
- EDID management up to 4K
- Multiple working mode
- Presentation Switching with 4K background + 8 layers
- AUX outputs
- PVW with all the inputs multi viewer and PST
- Demountable front panel for remote control
- Genlock for both inputs and outputs

Specification

Connectors	Input	4K Module fitted with 12G SDI Module fitted with	1 × DUAL-DVI / 1 × HDMI 1.4 / 1 × HDMI 2.0 / 1 × DisplayPort 1.2 1 × 12G/6G SDI or 4 × 3G/HD/SD SDI
	Output	4K Module fitted with: 2K Module fitted with: PVW Module fitted with: 12G SDI Module fitted with:	2 × HDMI 2.0 4 × HDMI 1.3 2 × HDMI 1.3 1 × 12G/6G SDI or 4 × 3G/HD/SD SDI
Performance	Communication	1 × RJ45 1 × RS232 1 × USB	
	Input Resolutions	SDI 480i 576i 720p@25/30/50/60Hz 1080i@50/59.94/60Hz 1080p@23.98/24/25/29.97/30/50/59.94/60Hz 1080psf@23.98/24/25/29.97/30Hz 2160p@30/50/60Hz DUAL-DVI / HDMI 1.4 SMPTE: 480i 576i 720p@50/60Hz 1080i@50/60Hz 1080p@50/60Hz 2160p@30Hz VESA: 800x600@50/60Hz 1024x768@50/60Hz 1280x720@50/60Hz 1280x800@50/60Hz 1280x960@50/60Hz 1280x1024@50/60Hz 1400x1050@50/60Hz 1600x1200@50/60Hz 1920x1080@50/60Hz 2048x1152@50/60Hz 2560x1600@50/60Hz 3840x1080@50/60Hz 3840x2160@24/25/30/50/60Hz DisplayPort 1.2 / HDMI 2.0 SMPTE: 480i 576i 720p@50/60Hz 1080i@50/60Hz 1080p@50/60Hz 2160p@50/60Hz VESA: 800x600@50/60Hz 1024x768@50/60Hz 1280x720@50/60Hz 1280x800@50/60Hz 1280x960@50/60Hz 1280x1024@50/60Hz 1400x1050@50/60Hz 1600x1200@50/60Hz 1920x1080@50/60Hz 2048x1152@50/60Hz 2560x1600@50/60Hz 3840x1080@50/60Hz 3840x2160@24/25/30/50/60Hz	
Output Resolutions	SDI	480i 576i 720p@25/30/50/60Hz 1080i@50/59.94/60Hz 1080p@23.98/24/25/29.97/30/50/59.94/60Hz 1080psf@23.98/24/25/29.97/30Hz 2160p@30/50/60Hz	
	HDMI 1.3	SMPTE: 720p@50/60Hz 1080p@50/60Hz VESA: 800x600@50/60Hz 1024x768@50/60Hz 1280x720@50/60Hz 1280x800@50/60Hz 1280x960@50/60Hz 1280x1024@50/60Hz 1400x1050@50/60Hz 1600x1200@50/60Hz 1920x1080@50/60Hz 2048x1152@50/60Hz	
Supported Standards	HDMI	1.3 1.4 2.0	
	DVI	DVI-I (Dual Link DVI) DVI (Single Link)	
Power	Voltage	AC 100V-240V/50/60Hz	
	Max Power	400W	
Environmental	Temperature	0°C - 40°C	
	Humidity	10%-85% RH	
Physical	Weight	Nett 15.1Kg Packaged 19.7Kg	
	Dimensions	Device 483mm×545mm×95mm Packaged 630mm×595mm×255mm	

Order Codes

Product Code	Item
110-0628-01-0	D6
190-1628-06-0	SDI Input Module (configurable 3G/6G/12G)
190-1628-07-0	4K Input Module (DVI/HDMI/DP)
190-1628-21-0	HDMI 2.0 4K Output Module
190-1628-23-0	SDI 12G Output Module
190-1628-30-0	Four Layer Output Module
190-1628-31-0	HDMI 2K Output Module (4×HDMI 1.3)
190-1628-50-0	PVW HDMI Output Module
950-0005-00-0	Hot Swap PSU 400W

Tel: +86-592-5771197 Fax: +86-592-5788216
 E-mail: sales@rgbink.com http://www.rgbink.com
 Headquarter: S601-607, S504 Weiye Building Torch Hi-Tech Industrial
 Development Zone, Xiamen, Fujian Province, P.R.C
Specifications are correct at time of printing and subject to change or alteration without notice.

Application

