

DXP H0404



Key Features

- Connects up to 4 HDMI sources to 4 x HDMI display monitors.
- HDMI 2.0 with 3D, HDCP 2.2 & DVI1.1 Compliant.
- Ultra-high-definition video up to 4K 60Hz @ 4:4:4 18Gbps (6Gbps per color)
- Support HDR10, Dolby Vision, HLG
- Supports up to, Dolby TrueHD, Dolby ATMOS, DTS-HD MA, DTS:X, LPCM 7.1 @ 192KHz
- Supports ARC (Audio Return Channel) function.
- Multiple control methods:
Front panel buttons/ IR remote control/ Web UI Control/ and RS232 Control.
- Built-in LCM screen & LED button at front panel provides quick view of all port connection.
- Rack mountable(1U design)
- S/PDIF coaxial audio outputs allow audio to be de-embedded from HDMI outputs
- Support HDMI cable lock on each HDMI input/output port


Specification

Connectors	Input	HDMI	4×HDMI-A
	Output	HDMI SPDIF	4×HDMI-A 4×RCA
	Communication	IR TCP/IP RS232	1×3.5mm mini jack 1×RJ45 1×3-pin pluggable terminal block
Performance	Input Resolutions	HDMI SMPTE	480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 2160p@60
		VESA	800×600@60 1024×768@60 1280×768@60 1280×1024@60 1366×768@60 1600×1200@60 1920×1080@60 2048×1152@60 2560×1600@60 3840×1080@60 3840×2160@60 4096×2160@60
	Output Resolutions	HDMI SMPTE	720p@50/60 1080p@50/60 2160p@60 1024×768@60 1280×768@60 1280×1024@60 1366×768@60 VESA 1600×1200@60 1920×1080@60 2048×1152@60 2560×1600@60 3840×1080@60 3840×2160@60 4096×2160@60
	Supported Standard	HDMI 2.0	
Power	Input Voltage	24V DC 1.25A (via AC plug pack supplied)	
	Max Power	14W	
Environment	Temperature	-10℃~ 55℃	
	Humidity	10%~95%	
Physical	Weight	1.7kg	
	Dimension	437mm×44mm×237mm	

Application



Dimension

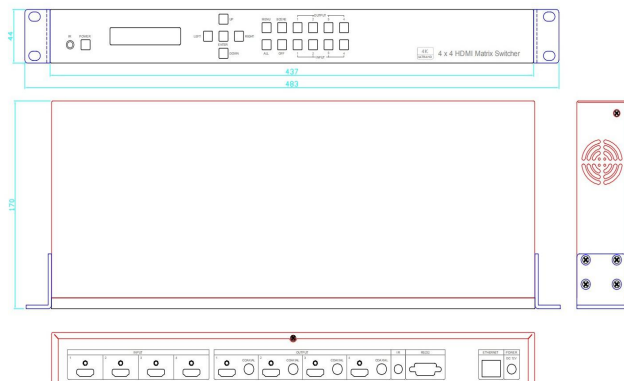

Order Codes

Product Code	Item
621-4104-01-0	DXP H0404

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com
Headquarter: S601 Weiy Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

RGBlink[®]

www.rgbink.com

