


FLEX 8




Key Features

- 8 optional inputs and 8 optional outputs
- Mixed signal matrix switching
- Up to 16 mega pixels output splicing
- Auto switch input
- Load and save up to 256 presets
- Output resolution up to 2048x1152@60Hz / 2560x816@60Hz
- EDID management
- Remote control by XPOSE and Rgblink OpenAPI

Application

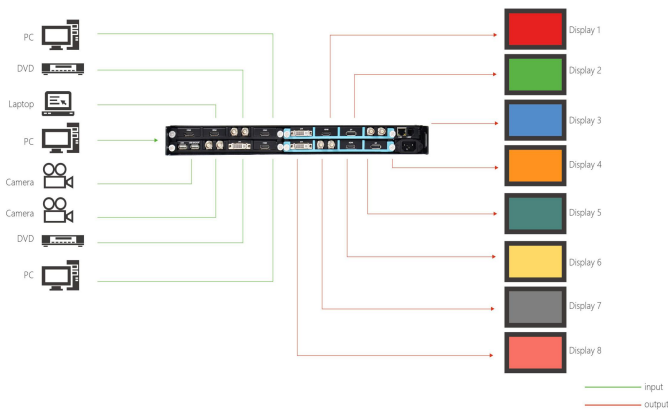

Dimensions

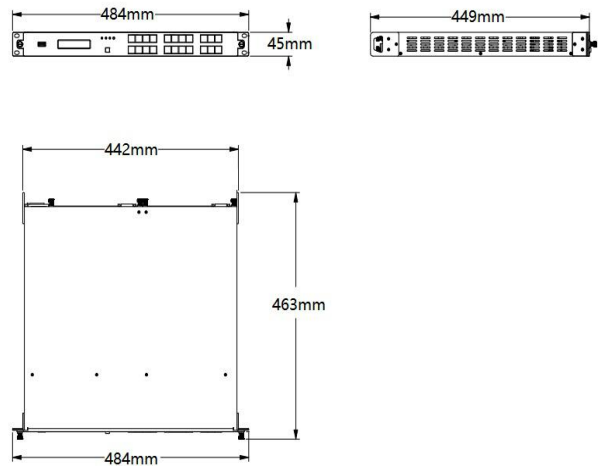

Order Codes

Product Code	Item
710-0008-01-0	FLEX 8
190-0001-10-2	USB Input/Backup Module
190-0001-07-2	SDI Input/Loop Module
190-0001-13-2	HDMI Input Module 1xHDMI
190-0001-03-2	DisplayPort Input Module 1xDisplayPort
190-0001-04-2	Composite DVI Input Module
190-0002-29-0	HDBaseT Input Module

Product Code	Item
790-0001-22-0	HDMI Output Module 1xHDMI
790-0001-21-0	DVI Output Module 1xDVI
790-0001-24-0	3G/HD/SD SDI Output Module
790-0001-27-0	DP Output Module
190-0002-30-0	HDBaseT Output Module
980-0004-01-0	Input EXT Interface
980-0002-01-0	Output EXT Interface

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.



www.rgblink.com



Specifications are correct at time of printing and subject to change or alteration without not.

Specification

Connectors	Input	2 slots, up to 8 inputs <i>Select from</i>		DVI Module	1 × DVI (compatible with DVI,VGA,YPbPr,CVBS)
				3G SDI Module	1 x BNC
				HDMI Module	1 x HDMI
				USB Module	1 x USB
			HDBaseT Module	1 x RJ45	
	Output	2slots, up to 8 outputs <i>Select from</i>		3G SDI Module	1 x BNC
				HDMI Module	1 x HDMI
				DVI Module	1 x DVI(compatible with DVI,VGA,YPbPr,CVBS)
				DisplayPort Module	1 x DisplayPort
				HDBaseT Module	1 x RJ45
	Communication	LAN	1 x RJ45		
		Serial	1 x RS232		
	Power	1 slot	1 x IEC		
Performance	Input Resolutions	SDI	480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60		
		SMPTE	480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60		
		DVI HDMI HDBaseT * USB	800x600@60 1024x768@60 1280x720@50/59.94/60 1280x800@60 1280x960@60 1280x1024@60 1400x1050@60 1600x1200@60 1920x1080@23.98/24/25/29.97/30/50/59.94/60 2048x1152@60		
	VESA	800x600@60 1024x768@60 1280x800@60 1280x720@50/59.94/60 1280x960@60 1280x1024@60 1400x1050@60 1600x1200@60 1920x1080@23.98/24/25/29.97/30/50/59.94/60			
	CVBS	480i 576i			
	YPbPr	480i 576i 720@50/59.94/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60			
Output Resolutions	Supported Standard	SDI	SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI		
		HDMI	1.3		
		DVI	S-DVI		
	DisplayPort	1.1			
	HDBaseT	1.0			
	Grey Level	10 bit			
Features	Splicing	16K1K output slicing only with the optional splicing output module			
	Scale	Management of Scale and Position only with the optional splicing output module			
	Format Conversion	Output resolution ajustable (HDMI,DP and HDBaseT output resolution adjusted after input or splicing output)			
	Brightness Ajustment	0-100			
	EDID Management	Yes			
	Hot Backup	Yes			
Power	Test Pattern	Input Output			
	Input Voltage	AC 100V-240V, 50/60Hz			
	Max Power	200W			
Environment	Temperature	0℃~40℃			
	Hudmidity	10%~85%			
Physical	Weight	Nett	2.5kg		
		Packaged	5.73kg		
	Dimension	Nett	484mmx463mmx45mm		
Packaged		635mmx545mmx135mm			

*When EXT4F-OS Splicing Output is installed, any HDBaseT input must be configured to 1080p resolution.

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
Headquarter: S601 Weiye Building,Torch Hi-Tech Development Zone,Xiamen,Fujian,P.R.C.

RGBlink[®]

www.rgblink.com



Specifications are correct at time of printing and subject tochange or alteration without notice.