


FLEX RS1



Dimensions

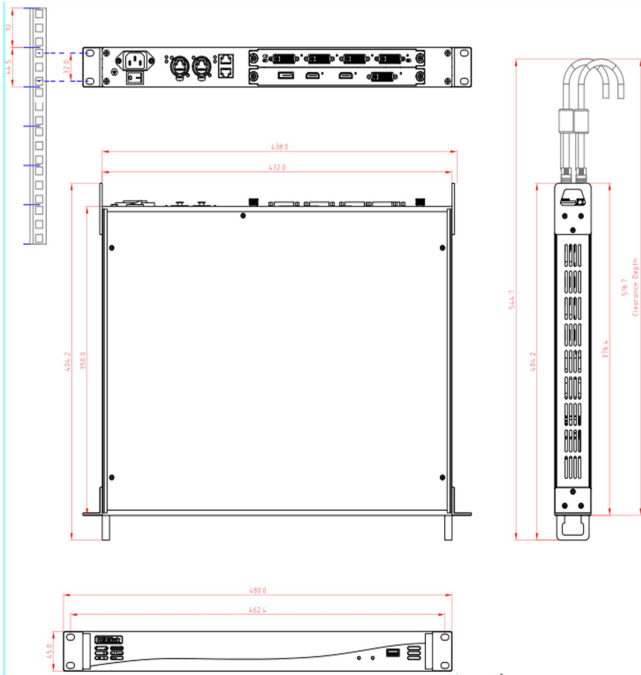

Order Codes

Product Code	Item
700-0001-01-0	FLEX RS1




Tel: +86-592-5771197 Fax: +86-592-5788216
 E-mail: sales@rgbink.com http://www.rgbink.com
 Headquarter: S601-607, S504 Weiye Building Torch Hi-Tech Industrial
 Development Zone, Xiamen, Fujian Province, P.R.C
**Specifications are correct at time of printing and subject to change
 or alteration without notice.**

Key Features

- 4K@60Hz input via DP 1.2, HDMI 2.0 with internal 4:4:4 processing and HDR compliance
- 4K@30Hz input via Dual Link DVI, HDMI 1.4
- 3 Different Operation Mode: Rotation, Edge Blending and Splicing
- Independent output scaling to any aspect or resolution
- Rotation: Any degree rotation for each of the output
- Edge Blending: Independent edge blending for each output
- Splicing: Image splicing for each 2K output
- Cascade multiple units for additional screens
- Control Support: Art-Net DMX512-A, RS 232, IP (TCP/UDP)
- Manage with XPOSE on Windows, MacOS, iOS, Android or Linux

Application

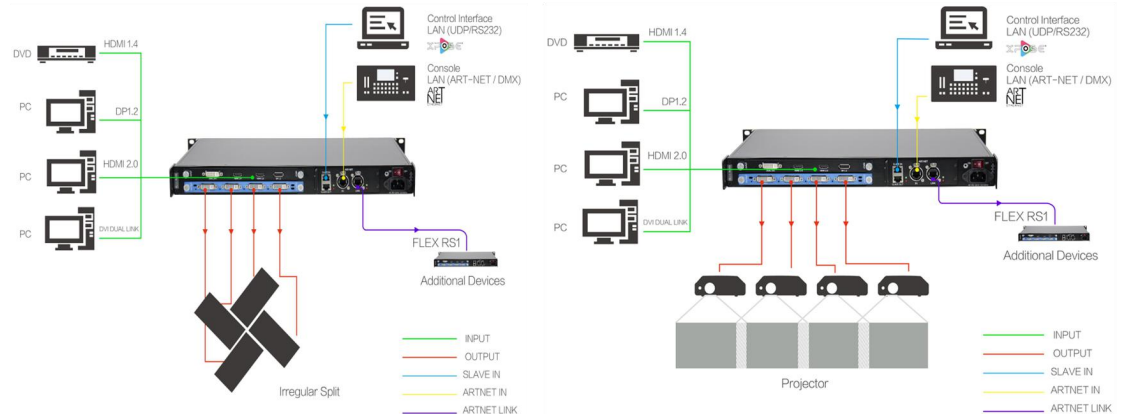

System Connection Diagram 1

System Connection Diagram 2

Specification

Connectors	Input	1 x Quad Slot 4K Module fitted with: 1 x DVI-I 2 x HDMI 1 x DisplayPort
	Output	1 x Quad Slot Quad DVI Module fitted with: 4 x DVI
	LAN /Ethernet	2 x RJ45
	ArtNet	2 x RJ45 (EtherCon)
	USB	1 x USB-A
	Power	IEC
Performance	Input Resolutions (4K Module fitted)	DVI/HDMI SMPTE: 480i 576i 720p 1080i 1080p 2160p VESA: 800x600@50/60Hz 1024x768@50/60Hz 1280x720@50/60Hz 1280x800@50/60Hz 1280x960@50/60Hz 1280x1024@50/60Hz 1400x1050@50/60Hz 1600x1200@50/60Hz 1920x1080@50/60Hz 2048x1152@50/60Hz 2560x1600@50/60Hz 3840x1080@50/60Hz 3840x2160@24Hz 3840x2160@25Hz 3840x2160@30Hz 3840x2160@50Hz 3840x2160@60Hz DisplayPort VESA: 1920x1080@60Hz 2560x1600@60Hz 3840x2160@30Hz
	Output Resolutions (DVI Module fitted)	DVI SMPTE: 720p 1080p VESA: 800x600@50/60Hz 1024x768@50/60Hz 1280x720@50/60Hz 1280x800@50/60Hz 1280x960@50/60Hz 1280x1024@50/60Hz 1400x1050@50/60Hz 1600x1200@50/60Hz 1920x1080@50/60Hz
	Supported Standards	HDMI 1.4 2.0 DVI DVI-I (Dual Link DVI) DisplayPort 1.2 USB 2.0
Power	Voltage	AC 85-264V, 50/60Hz
	Max Power	65W
Environmental	Temperature	-25°C - 55°C
	Humidity	20%-90% RH
Physical	Weight	Nett 2.5kg Packaged 5.73kg
	Dimensions	Device 480mm x 303mm x 45mm
		Packaged 540mm x 460mm x 135mm