




Key Features


- Picture-in-Picture (PIP)
- Transition effects
- RGBlink instant TAKE with pre-Sync
- Audio controls
- Support for additional input options
- EDID management on board
- On board test patterns
- Support for multi-device cascade
- Two empty slots reserved for universal sender cards and RGBlink SubitoNX™ Quatro sender module to install
- Support for XPOSE 2.0 control
- Support for RGBlink OpenAPI

Application

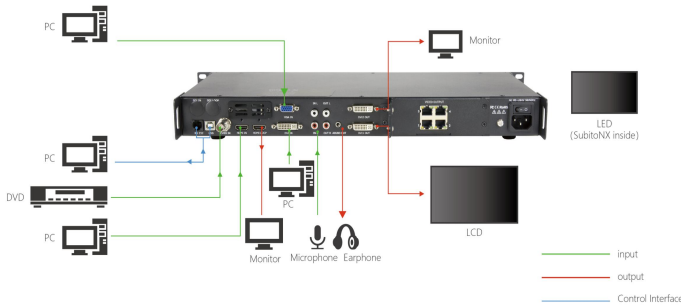

GX4pro with SubitoNX Quatro Module

Dimensions

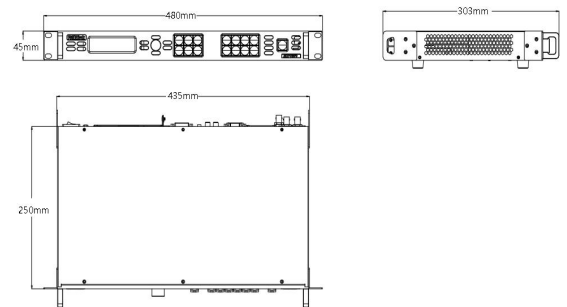

Order Codes

Product Code	Item
820-1004-05-0	GX4pro
190-0001-02-1	Single VGA Input Module
190-0001-04-1	Single DVI Input Module
190-0001-07-1	Single 3G SDI Input/Loop Module
190-0001-09-1	Single CVBS Input/Backup Module

Product Code	Item
190-0001-13-1	Single HDMI Input Module
190-0004-03-0	Single HDMI Input/Loop Module
190-0004-05-0	Single HDBaseT Input Module
190-0004-08-0	Single SDI Input/Loop Module
880-0033-01-0	SubitoNX Quatro Sender Module

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

www.rgblink.com



Specification

Connectors	Input	<i>Standard with</i> HDMI In/Loop Module 2×HDMI-A DVI Module 1×DVI-I VGA Module 1×DB15 CVBS Module 1×BNC <i>1 specific slot up to 1 SDI input</i> <i>Select from</i> SDI In/Loop 2×BNC(1 In 1 Loop) <i>1 slot up to 1 SDI input</i> <i>Select from</i> DVI Module 1×DVI-I (DVI,VGA, YPbPr,CVBS) HDMI Module 1×HDMI-A HDMI Module 2×HDMI-A (1 In 1 Loop) 3G SDI Module 2×BNC (1 In 1 Loop) USB Module 2×USB-A (1 In 1 Backup) CVBS Module 2×BNC (1 In 1 Backup) HDBaseT Module 1×RJ45
	Audio	IN L/R 2×RCA OUT L/R 2×RCA Audio Out 1×3.5mm Stereo Jack
	Output	DVI 2×DVI-I <i>2 slots up to 4 Gigabit ethernet ports</i> SubitoNX Quatro Module 4×RJ45
	Communication	Serial RS232 In 1×RJ11 Serial USB In 1×USB-B
	Power	1×IEC
Performance	Input Resolutions	DVI HDMI SMPTE 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 VESA 800×600@60 1024×768@60 1280×768@60 1280×1024@60 1366×768@60 1600×1200@60 1920×1080@60 VGA VESA 800×600@60 1024×768@60 1280×1024@60 1366×768@60 1440×900@60 1600×1200@60 1920×1080@60 SDI SMPTE 480i 576i 720p@25/30/50/60Hz 1080i@50/59.94/60Hz 1080p@23.98/24/25/29.97/30/50/59.94/60Hz
	Output Resolutions	<i>Select from below or configure customized</i> DVI SMPTE 720p@30/50/60 1080p@30/50/60 VESA 1024×768@60 1280×720@60 1280×800@60 1280×1024@60 1360×768@60 1366×768@60 1440×900@60 1400×1050@60 1600×1200@60 1680×1050@60 1920×1080@60 1920×1200@60 2048×1152@60 2560×816@60
	SubitoNX™ Quatro	RJ45 Digital Output Port (each port) Capacity 2310000 pixels Horizontal Range 3840 pixels Vertical Range 1920 pixels
	Supported Standard	SDI SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI VGA UXGA HDMI 1.3
	Power	Input Voltage AC 100V-240V, 50/60Hz Max Power 25W
Environment	Temperature	0°C ~ 55°C
	Humidity	20%~90%
Physical	Weight	Net (Device) 3.1kg Packaged 5.25kg
	Dimension	Net (Device) 480mm×303mm×45mm Packaged 540mm×360mm×135mm

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink
www.rgblink.com

