

MSP 318-4




Key Features

- Compatible with resolution up to 3840X2160@60(YCbCr420)
- HDCP compatible
- 1xLC connector on both transmitter and receiver
- Transmit 300m by Multi Mode Fiber or 2000m by Single Mode Fiber
- 1310/1550nm laser diode as optical source
- Built-in 1310/1550nm WDM filter
- Transmission bandwidth 10.2Gb/s
- Resist electromagnetic interference
- Easy installation


Specification

| | | | | |
|--------------------|-------------------|---|--------|---|
| Connectors | Input | Transmitter | 1xHDMI | |
| | Output | Receiver | 1xLC | |
| Performance | Input Resolution | Transmitter | 1xLC | |
| | | Receiver | 1xHDMI | |
| | Output Resolution | HDMI | SMPTE | 480i@60 576i@60 720p@50/60 1080i@50/60 1080p@50/60 |
| | | | VESA | 800x600@60 1024x768@60 1280x768@60 1280x1024@60 1360x768@60 1366x768@60 1400x1050@60 1440x900@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1152@60 2560x812@60 2560x816@60 3840x2160@30 3840x2160@60 |
| | | HDMI | SMPTE | 480i@60 576i@60 720p@50/60 1080i@50/60 1080p@50/60 |
| | VESA | 800x600@60 1024x768@60 1280x768@60 1280x1024@60 1360x768@60 1366x768@60 1400x1050@60 1440x900@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1152@60 2560x812@60 2560x816@60 3840x2160@30 3840x2160@60 | | |
| Supported Standard | HDMI | 1.4 | | |
| Power | Input Voltage | 5V DC | | |
| Physical | Weight | 0.06kg | | |
| | Dimension | 60mmx22mmx11mm | | |

Application

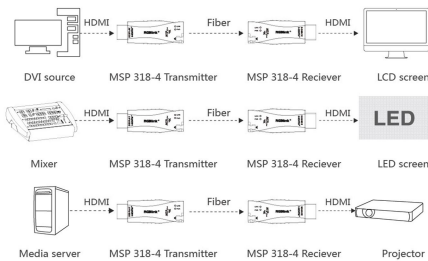

Dimension

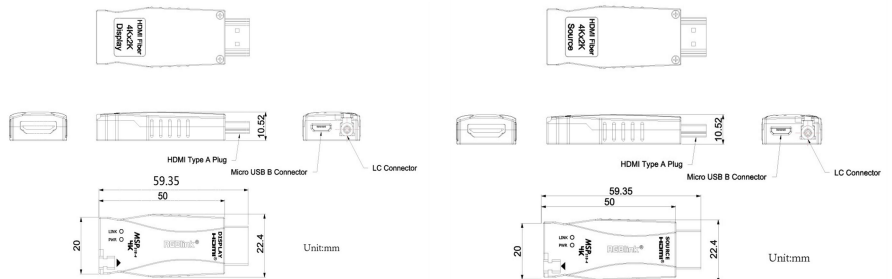

MSP 318-4 Transmitter

MSP 318-4 Receiver

Order Codes

| Product Code | Item |
|---------------|-----------|
| 611-0012-01-0 | MSP 318-4 |