
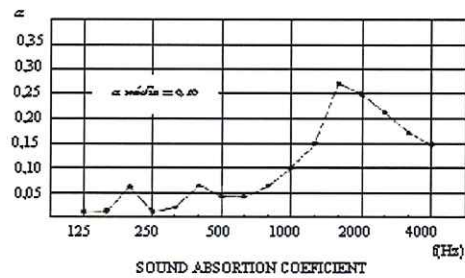


TECHNICAL DATA SHEET

Dimensions 600 x 300 x 3mm 23 1/3 x 11 2/3 x 1/8" | 300 x 300 x 3mm 11 2/3 x 11 2/3 x 1/8"

Glue-Down	Standard	Unit	Specification	
			Sanded	Waxed
Dimensions	EN 427	mm	600 ± 0.5% 300 ± 0.5%	
Squareness	EN 427	mm	600: < 1.0mm 300: 0.5mm	
Thickness	ISO 7322	mm	3.0 ± 0.3%	
Apparent Density	EN 672	Kg / m ³	≥ 200	
Dimension stability (humidity)	EN 434	%	≤ 0.4	
Curling	EN 434	mm	≤ 6	
General Properties				
Moisture Content	EN 12105	%	≤ 7	
Formaldehyde Emission	EN 12149 (Method C)	mg / Kg	≤ 95	
Vinyl Chloride Monomer (VCM)	EN 12149 (Test B)	mg / Kg	≤ 0.2	
Thermal Resistance	EN 12667	m ² K/w	0.0583	0.0572
Reaction to Fire	EN 15102:2007	Class	E	E
Sound Absorption	ISO 354	αw	0.10	
Release of Heavy Metals and Specific Elements	EN 12149	-	Fulfilled	

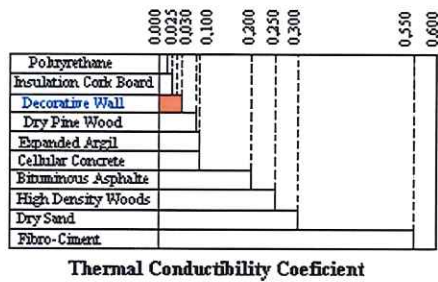

Storage: The temperature and humidity of the place should be ± 20-25°C

Environmental Health and Safety: If properly used, this product is not known to be environmental harmful. Based on available toxicity tests, this product is not human hazard. Besides, as certified by the binder manufacturer, the type of glues and chemicals used in the manufacturing of our products, are specially designed for the production of cork agglomerated being food grade products. All products accomplish to F.D.A. rules, chapter 21, parts 170 to 199 and are in accordance with EN 71 directive.