


Terra 800



Terra 800

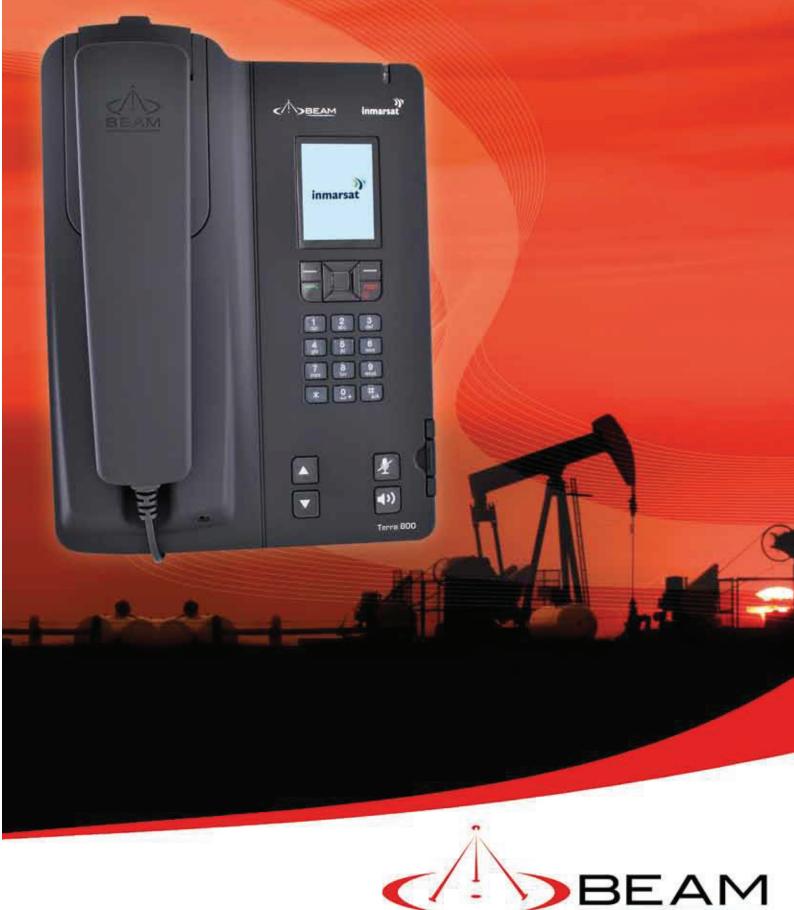

Terra 800 is an all-in-one communications terminal, specifically designed to be utilized in a wide variety of land based applications; such as a dedicated telephone service or a back up emergency telephone system that can be deployed throughout the world.

Featuring an intelligent RJ11/POTS interface, it enables connection of up to 5 standard corded/cordless phones or integration to a PABX system. It can support cable runs of up to 600m (2000 feet) with in-built intelligence to support standard ring, busy and dial tones.

The Terra 800 has an intuitive color LCD display that provides easy and convenient access to send and receive SMS or to retrieve phone numbers stored in the terminal.

Other key features of the Terra 800 include: a secondary SIM socket to override the internal SIM, an active privacy handset, in-built handsfree speakerphone, integrated bluetooth, USB data, in-built phone book, adjustable ring tones, desk or wall mountable.

The Terra 800 is designed to operate with the Inmarsat Link Phone service and is supplied with a dedicated high quality directional/fixed antenna system to provide a completely integrated solution that is ready for use anytime.



Remote Towns/ Communities







In Building Disaster Recovery



In Building - PBX Integration







Bluetooth



SIM (Rear)





USB

LCD Display

Mute





POTS/RJ11





Data

SMS

Phonebook

Privacy Handset

Handsfree



Work Sites

Remote









Farm Houses

KEY FEATURES

DESIGN

- High quality IP54 rated enclosure
- Colour LCD Screen
- Compact all-in-one design
- Wall or desk mounting options
- Lock bolt for securing to wall
- Accessible control buttons
- Integrated antenna connections
- In-built Slimline active privacy handset
- In-built speakerphone
- Cable routing LHS/TOP/BOTTOM
- Dual SIM card enclosures

POWER

- 10-32V DC Input
- 110-240V AC plug pack, included

INTELLIGENT POTS/RJ11 INTERFACE

- Supports up to 600m (2000 feet) of RJ11 cable runs
- Standard dial, ring & busy tones
- Integrates to PABX System
- Support standard corded, cordless and DECT phones
- Auto-dial & speed dials available

VOICE CALLING FEATURES

- In-built phonebook/contacts
- Privacy handset calling
- In-built handsfree speakerphone
- Access from PABX or other corded/cordless handsets
- Bluetooth headsets (not included)

OTHER KEY FEATURES

- Includes BEAM Directional/Fixed Antenna (Passive)
- Adjustable brightness
- USB data access
- Supported by Inmarsat's IsatPhone Link Service

www.beamcommunications.com

TECHNICAL SPECIFICATIONS

AVERAGE POWER CONSUMPTION (Passive Antenna Connected)	CURRENT @ 15V AVERAGE	POWER
Standby	0.17 A	2.6 W
Transmit (RJ11/POTS call)	0.31 A	4.7 W
Transmit (Spreakerphone)	0.27 A	4.0 W
Sleep Mode	5mA	75mW
Peak Current	0.70 A	10.5 W
PHYSICAL SPECIFICATIONS	6	
Dimensions	241 x 185 x 93 (mm)	9.49 x 7.28 x 3.66 (inches)
Weight TR800 Only	1.27kg	2.80lb
ENVIRONMENT SPECIFICA	TIONS	
Operation	-20°C to +55°C	-4°F to +131°F
Storage	-30°C to +80°C	-22°F to +176°F
Humidity		<=75% RH
TRANSCEIVER		
Inmarsat-4 Satellite GMR - 2+ Frequency Bands	i	
Tx Operating Frequency	1626.5 - 1660.5 MHz	
Rx Operating Frequency	1518 - 1565 MHz (Inmarsat) 1565.19 - 1585.65 MHz (GPS)	
RF Output Impedance	50 Ohms	
Carrier Frequencies	Channel 0 = 1626.525 MHz Channel 169 = 1660.475 MHz	
TX Modulation	GMSK	
RX Modulation	OQPSK	
CONNECTORS / INTERFAC	ES	
POTS/RJ11	RJ11/2-wire, 5REN @ 600m, Adjustable dial, ring, busy tone configured frequency and adaptive impedance.	
Inmarsat Antenna	TNC-Female	
GPS Antenna	SMA-Female	

10-32 V DC		4-way microFit (AC/DC adator, or DC lead)	
Privacy Handset	Port	RJ9 connector	
Configuration/Da	ata	USB Mini B	
Speakerphone		In-built speaker/microphone	
CERTIFICATIONS			
Inmarsat Type Approval, FCC, CE Compliance, Electrical Safety, RoHS, Industry Canada, C-Tick			
 IP54 Rating 5 = Protected against dust limited ingress (no harmful deposits). 4 = Protection against water sprayed from all directions - limited ingress permitted. 			
KIT CONTENTS			
Terra 800 Terminal			
ISD700 Directional/Fixed Antenna (Passive)			
Privacy Handset			
110 - 240V AC Plug Pack, 15V DC Out			
10 - 32V DC Power Cable			
1 x Spring cup (attached to terminal)			
1 x Springless cup			
USB Cable			
2m Alert wiring loop			
Wall mounting plate			
User manual & Quick Start Guide			
Antenna Installation Guide			
OPTIONAL ACCESSORIES			
ISD936	lsatDock/	Terra 10m SMA/TNC cable kit (Passive)	
ISD937	lsatDock/	Terra 20m SMA/TNC cable kit (Passive)	
ISD939	lsatDock/	Terra 30m SMA/TNC cable kit (Passive)	
ISD940	lsatDock/	Terra 40m SMA/TNC cable kit (Passive)	
ISD941	lsatDock/	Terra 50m SMA/TNC cable kit (Passive)	
RST055	Beam UPS Battery Pack		



Globalsat USA

10404 W. State Road 84, Suite 101 Davie, FL 33324 **Tel:** +1 (561) 208 6088 **globalsat.us**

Model: TR800