



Quick Set Shelf Kit for cart models: R8/R10/R11G/R12

RSH10Q Model Specifications	
Length (Compact)	32"
Length (Extended)	50"
Width	16"
Weight	16.5 lbs.

Your RSH10Q shipping box should contain the following part:			
4 x	5/16" low profile socket head screw	6 x	swivel tab
4 x	round support tubes	10 x	short Allen bolt
1 x	32" x 16" main shelf	10 x	small washers
1 x	18" x 16" shelf extension	10 x	small 10 mm hex nut
2 x	wing bolts with spring	1 x	10 mm wrench
2 x	metal rail, long	1 x	Allen wrench, large
2 x	metal rail, short	1 x	Allen wrench, small
2 x	hooked mounting bracket		

LIMITED WARRANTY: RocknRoller Multi-Cart shelves carry a one-year warranty against defective material or workmanship on components. As with any equipment, normal maintenance is required. Caution should be used when moving any load with Multi-Carts or any other dolly.

Rail Adjustment

The support rails and mounting brackets will fit between the handles. The rails feature a slotted hole for adjustment. If needed, the width of the rails can be adjusted by loosening the bolts that secure the rails to the bottom. Please make sure all of the bolts are tightened again before using the shelf.



Customer Service & Technical Support
ACE PRODUCTS GROUP

3920 Cypress Drive, Suite B Petaluma, CA 94954 • 800-950-1095 • 707-765-1500 • www.rocknrollercart.com • info@aceproducts.com


Assembly Instructions

1. Install support tubes



With the RocknRoller Multi-Cart extended and both handles raised, install the round support tubes. Insert the 5/16" low profile socket head screws into the handle's pre-drilled holes from the outer edge, so the support tube is inside the handle. Make sure each tube is set to the same height before screwing them in securely.

2. Install long rails

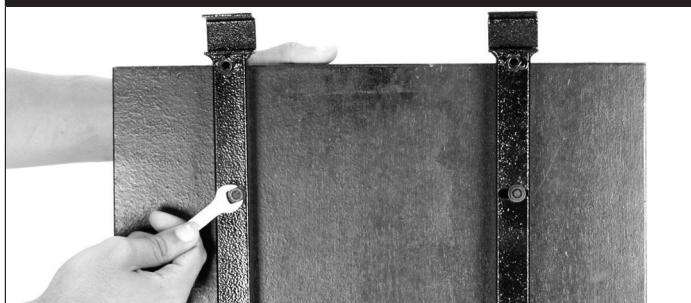

Install the 2 long metal rails to the 32" x 16" main shelf. Position the rails on the board so the hooked end sits just past the same edge. Insert small Allen bolts into the shelf from the textured side, and secure with a washer and 10 mm hex nut. Do not tighten the bolts completely yet.

3. Install short rails



Install the 2 short metal rails to the 18" x 16" extension shelf. Position the rails on the board so the hooked end sits just past the same edge. Insert small Allen bolts into the shelf from the textured side, and secure with a washer and 10 mm hex nut. Do not tighten the bolts completely yet.

4. Connect shelf units



Connect the two shelf pieces by inserting the rails of the shelf extension into the larger rails of the main shelf. Install the wing bolts with springs to lock the rails together securely.

5. Secure shelf



Install the shelf by placing the hooked brackets on the support tubes. Align the deck pieces together and tighten all the short Allen bolts completely. The rails should now be secured to the shelves firmly.

6. Short shelf option



The shelf may also be used while the cart is compact. Simply replace the extension shelf with the short, hooked mounting brackets. The open end of hook should be facing downwards. Please make sure to secure the brackets by tightening the wing bolts firmly before installing the shelf.

There are also additional swivel tabs that may be installed by the shelf's hooks. They can be rotated under the support tubes once the deck is installed. This provides additional, light security and is optional.



Customer Service & Technical Support
ACE PRODUCTS GROUP