

# THE BISON BELT™

INSTRUCTION MANUAL



# INTERFACE AND ADJUSTMENT



- 1** WEAVE THE INNER BELT COMPONENT (G-HOOK FIRST) THROUGH YOUR PANT BELT LOOPS. MAKE SURE THE HOOK IS POINTED DOWNWARDS.
- 



- 2** ADJUST THE INNER BELT TO THE LENGTH YOU REQUIRE. MEDIUM AND X-LARGE USE THE FIRST LOOP. SMALL AND LARGE USE THE SECOND LOOP.



**3** HOOK AND SECURE THE HOOK OF THE G-HOOK INTO THE APPROPRIATE LOOP.

---



**4** PLACE THE FEMALE BUCKLE OF THE OUTER BELT IN LINE WITH THE CENTER OF YOUR BODY AND LINE UP THE TOP WITH THE INNER BELT.



- 5** GUIDE AND SECURE THE OUTER BELT AROUND THE INNER BELT AS EVENLY AS POSSIBLE.
- 



- 6** SECURE THE MALE AND FEMALE BUCKLE ENDS TOGETHER. PULL THE 1" WEBBING END TO ADJUST THE OUTER BELT TO PREFERENCE.



**7** FOR WEBBING MANAGEMENT, ROLL THE EXTRA WEBBING INWARDS TOWARD THE BELT.

---



**8** UNDO THE VELCRO® ONE WRAP AND PLACE THE ROLLED WEBBING DOWN ON THE BELT.



9

SECURELY FASTEN THE VELCRO® ONE WRAP OVER THE ROLLED WEBBING END. YOUR BISON BELT™ IS NOW ADJUSTED AND READY TO USE.

---

## ACCESSORY INSTALLATION






- 1 LOOSEN AND REMOVE THE WEBBING END FROM THE FIRST SLOT OF THE MALE BUCKLE
- 



- 2 REMOVE THE MALE BUCKLE COMPLETELY FROM THE WEBBING END.

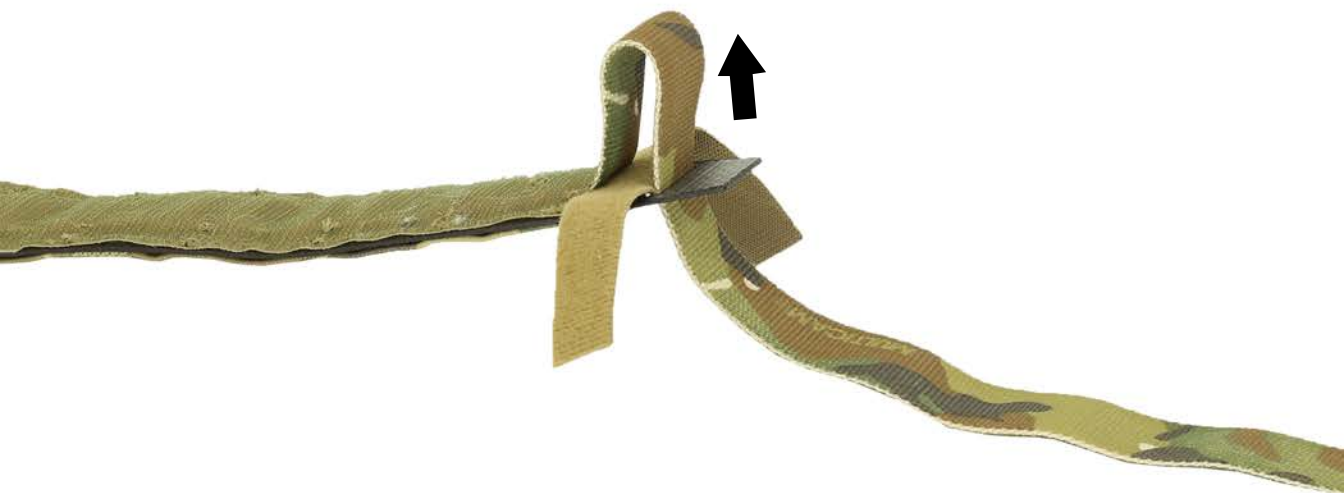

**3** LOOSEN THE WEBBING ON THE END OF THE OUTER BELT TO RELEASE THE TENSION ON THE VELCRO® ONE WRAP.


---



**4** REMOVE THE VELCRO® ONE WRAP FROM THE OUTER BELT.



- 5** SLIDE YOUR ACCESSORY ONTO THE OUTER BELT TO YOUR DESIRED LOCATION.
- 

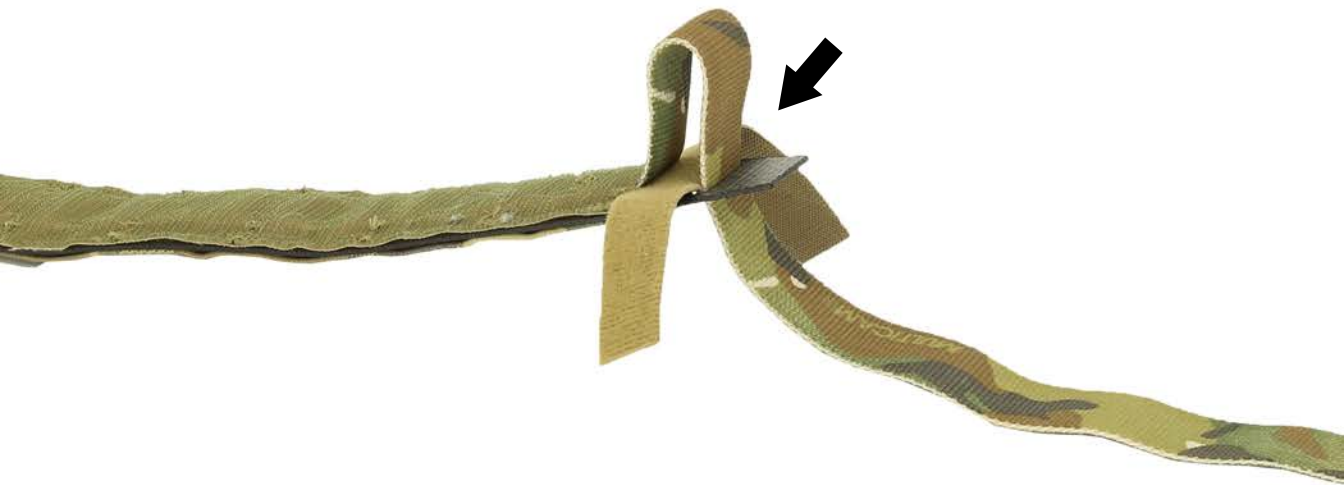


- 6** REINSTALL THE VELCRO® ONE WRAP UNDER THE WEBBING.



**7** WEAVE THE WEBBING END THROUGH THE BACK SIDE OF THE BOTTOM SLOT IN THE MALE BUCKLE.

---

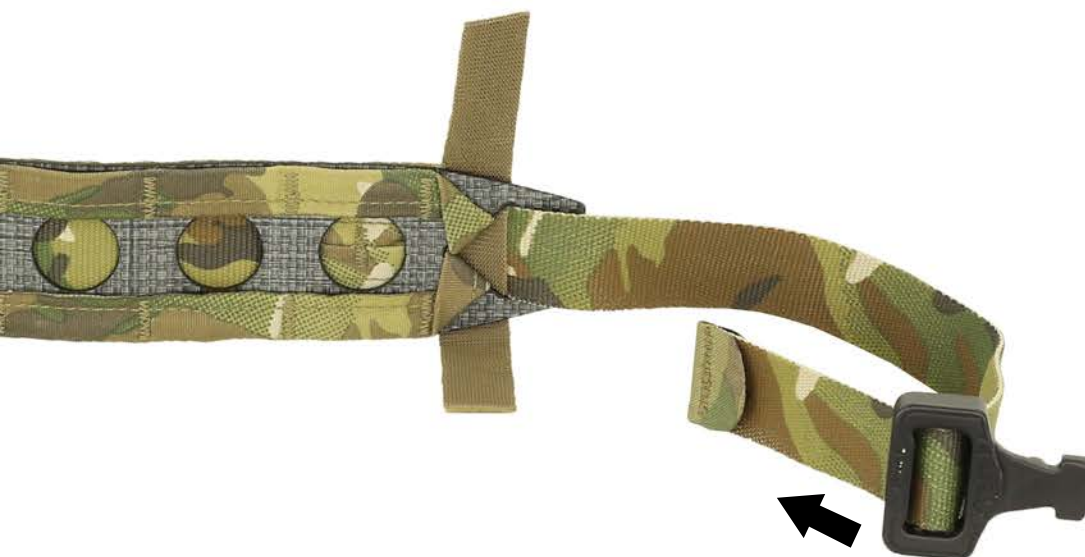

**8** WEAVE THE WEBBING END THROUGH THE FRONT SIDE OF THE UPPER SLOT IN THE MALE BUCKLE.








9 ADJUST AND RESECURE THE WEBBING END BY FOLLOWING INSTRUCTIONS 4 TO 9 IN THE INTERFACE AND ADJUSTMENT SECTION IN THIS MANUAL.

---

## SIZING GUIDE

To determine the size of Bison Belt you require, use the diagram and instructions for reference.

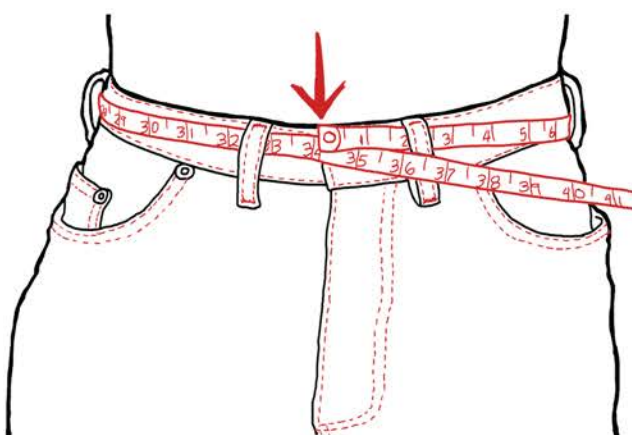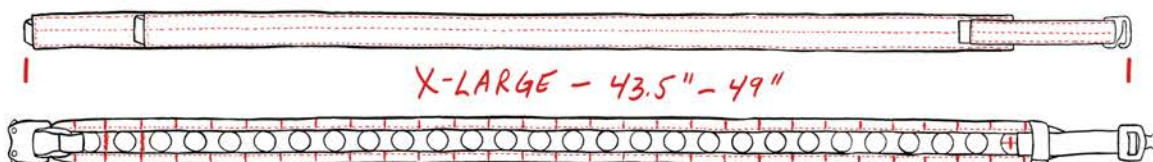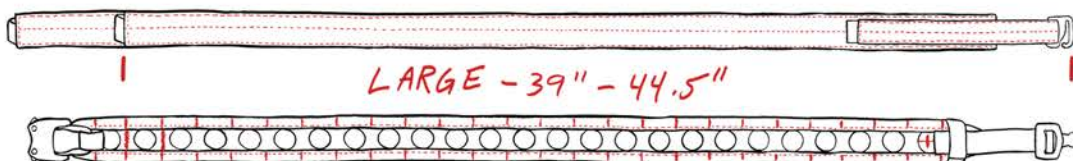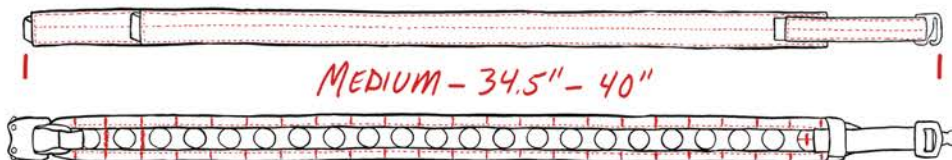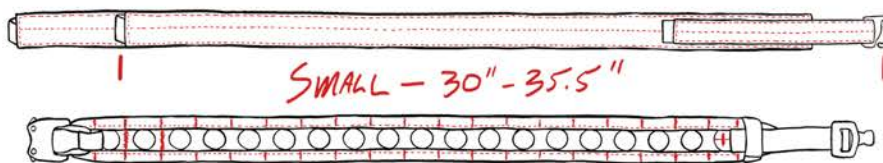

1. Do not use your pant size for reference as pant size varies greatly amongst brands (kind of gives you horrible flashbacks of plate sizing am I right?!).

2. Do an exact measurement of your waist around your pants. Use a measuring tape or a piece of rope or string and put it through your pant loops (while wearing pants) as shown.

3. Note the measurement on the tape or of the rope and then use the attached sizing guide to find your size.

**As per this picture the waist size is a 34 and you would choose a size small belt.**