

FERRO CONCEPTS



Chesty Rig Mini V2 | Table of Contents

Product Overview Chesty Rig Mini V2.....	1
Shoulder & Waist Strap Adjustment	2-3
Front Flap G-Hook Installation	4
PTT Placement Example	5



Chesty Rig Mini V2 (Front)



Chesty Rig Mini V2 | Product Overview

The Chesty Rig Mini V2 is an update to our Chesty Rig Mini Harness, providing a sleek alternative while maintaining the quality and functionality of the Chesty Wide V2. We've updated the H-harness system with multiple adjustment points for improved fitment, articulation, and mobility. The V2 is compatible with all of our ADAPT front flaps and contains multiple cable management points.

Features:

- Updated H-Harness System for increased articulation
- Multiple Points of adjustability for dialed fitment
- Metal Tri-Glides
- Compatible with our ADAPT Front Flaps
- Weight: 9.93 oz
- Made in USA

Components:

Chesty Rig Mini V2



Chesty Rig Mini V2 (Front)



Chesty Rig Mini V2 (Back)

Shoulder & Waist Strap | Adjustment



1. To adjust the sizing of the shoulder straps and waist strap, pass the webbing through the metal tri-glides. Adjustments can be made on the front and rear of straps to help locate the placement of the front, shoulder straps, and H-harness.



2. Pull the webbing through the tri-glide and ensure the webbing is taut.

Shoulder & Waist Strap | Adjustment



3. Once the adjustments are finalized on the front and rear shoulder straps, pass the excess webbing through the bottom of the shoulder strap.



4. The placement of the metal tri-glides can be adjusted by holding both sides of the webbing and moving the tri-glide up or down.

Front Flap G-Hook | Installation



1. To install a front flap on the Chesty V2, pass G-Hook through the same loop of the shoulder strap ring.




2. Ensure that the G-Hook has passed all the way through the loop and repeat on the opposite side.

PTT Placement | Example



1. The vertical laser-cut slots on the front of both shoulder straps is ideal for cable passthrough or an ideal location for PTT.

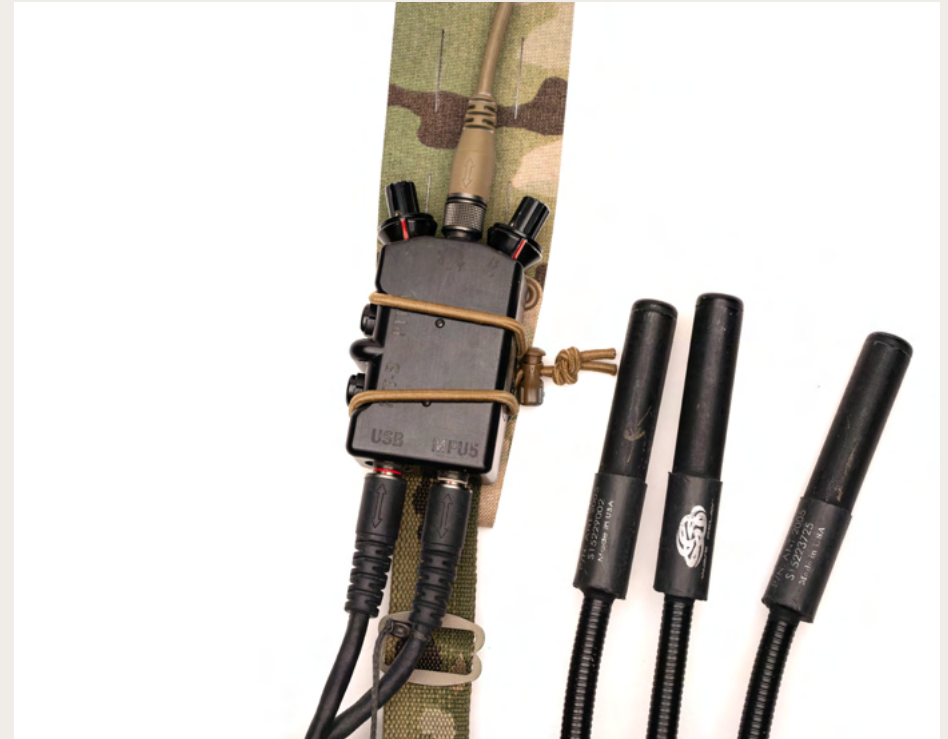

2. PTT can be secured to the front of either shoulder straps with the use of the Retention Collection or any other retention method.