

6 UNIT NEW STYLE KLEEN-FLO[®] WASHER PARTS BREAKDOWN

**THIS UNIT IS SHIPPED FULLY ASSEMBLED AND READY TO HOOK UP.
DESIGNED FOR CLEANING MILKING CLUSTERS ON A VACUUM OPERATED SYSTEM.**

56200 - Complete 10" claw washer assembly , 6 unit

56201 - Complete 15" claw washer assembly , 6 unit

56202 - Stainless wall bracket for 10" washer

56203 - Stainless wall bracket for 15" washer

56209 - Weight (3 required)

56210 - Clip pin (2 required)

56211 - Rod spring

56212 - Stainless steel float

56213 - Gasket for clear sight tube (2 required)

56214 - Clear sight tube, 10"

56215 - Clear sight tube, 15"

56216 - Bottom dome with 6 - 5/8" ports

56235 - Bottom dome with 6 - 3/4" ports

56217 - Bracket gasket (under bottom dome)

56218 - Drain hose

56219 - Check valve assembly for drain hose

56220 - Ball only for drain assembly

56221 - Clip pin for drain assembly

56222 - Rubber plug for ports

56259 - Stainless e-clip for washer rod

56245 - Valve guide block without bushing

56252 - New style stainless dome with 23/32" hole

56267 - 15" rod assembly for new style washer,
with valve head and rod seal

56269 - 10" rod assembly for new style washer,
with valve head and rod seal


56256 - New style valve head

56261 - New style 15" rod ONLY

56263 - New style 10" rod ONLY

38215 - Blue elbow, with 3/8 thread

38211 - Rubber seal for releaser rod

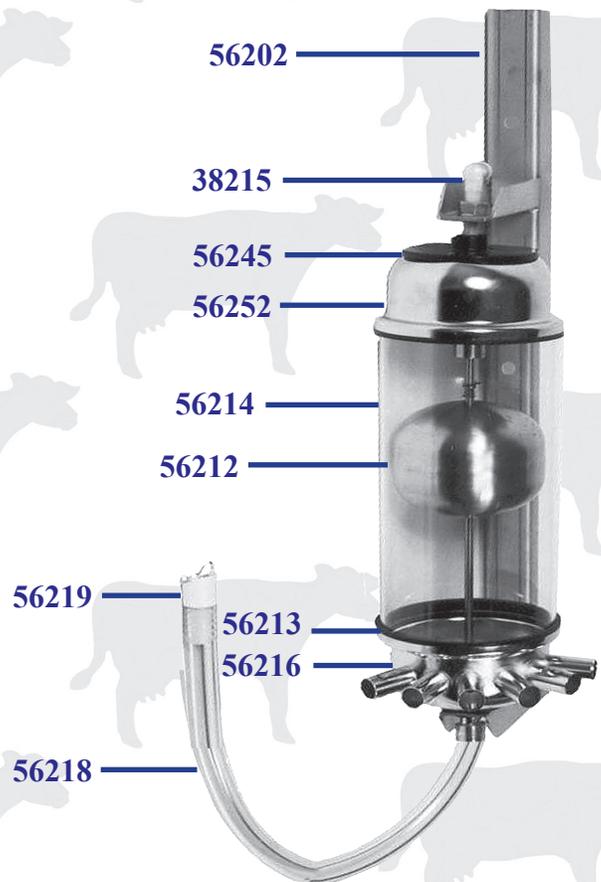

KLEEN FLO NEW STYLE CLAW WASHER INSTALLATION GUIDE

1) Claw washers should be installed on the wall, 12 to 16 inches above the top of the tub, where the milker units will be in to wash.

2) The drain hose on the bottom of the washer with a check ball, should be about 3" from the bottom of the tub. The elbow on top of the washer is a vacuum inlet; install a valve or lever stall cock to shut off vacuum supply when not in use.

3) Performance of the claw washers may vary from one installation to the next, as some vacuum systems may be at a higher or lower vacuum level.