

#### **FEATURES**

- Easy connection
- · Ergonomically designed for comfortable handling
- · Suspension possible by both the built-in hook and the handle
- The normal grip is adjusted to fit the hand during normal usage · Extremely durable acetal plastic that also isolates against cold media
- · Infinitely variable airflow with high volume flow for efficient cleaning

#### **SPECIFICATIONS**

	Airflow at inlet pressure of 6 bar (87 psi)	500 l/m (18 CFM)
	Max working pressure	Standard blow guns: 16 bar (232 psi) 8 bar (116 psi) blow gun with regulator
	Temperature range	-20°C to +60°C (-4°F to +140°F)

#### APPLICABLE SAFETY STANDARDS



The products with the "OK" symbol are compliant with the OSHA directive STD1-13.1 (1910-242(b). When dead ending occurs, static pressure at the main orifice shall not exceed 30 psi (2 bar).



The products with the "EAR" symbol are compliant with the International Standard ISO 4414 - Pneumatic Fluid Power and OSHA 1910.95 - Occupational Noise Exposure. These products have a sound level below 85 db(A) and meet the EU Machine Directive §1.5.8. concerning noise reduction



#### **BLOW GUN** WITHOUT NOZZLE

1/4" BSPT

PART NUMBER DESCRIPTION PRICE Blow gun, C112080000 £13.70 no nozzle supplied



620

620

#### OK **BLOW GUN** WITH REGULATOR 1/4" BSPT



PART NUMBER DESCRIPTION PRICE Blow gun 90 mm, C112080300 £34.06 automatic shut-off



PART NUMBER	DESCRIPTION	PRICE
C112080100	Blow gun, non-removable nozzle	£15.43
C112080200	Blow gun, removable nozzle	£16.19





PART NUMBER	DESCRIPTION	PRICE
C112083100	Blow gun 90 mm, non-removable nozzle	£17.00
C112083200	Blow gun 90 mm, removable nozzle	£17.88

#### **BLOW GUN DISPLAY CASE**

#### **FEATURES**

1/4" BSPT

- · Blow gun display and contents
- 208 Series
- · Easy connection
- · Suitable for air and fluids
- Ergonomically designed for comfortable handling



#### **20 PIECE BLOW GUN DISPLAY CASE**

PART NUMBER	DESCRIPTION	PRICE
C112089984	20 x C112080100	£309 16



20 PIECE 208 STAR-TIP **BLOW GUN DISPLAY CASE** 


PART NUMBER	DESCRIPTION	PRICE
C112089986	20 piece 208 star-tip display case	£313.17



620





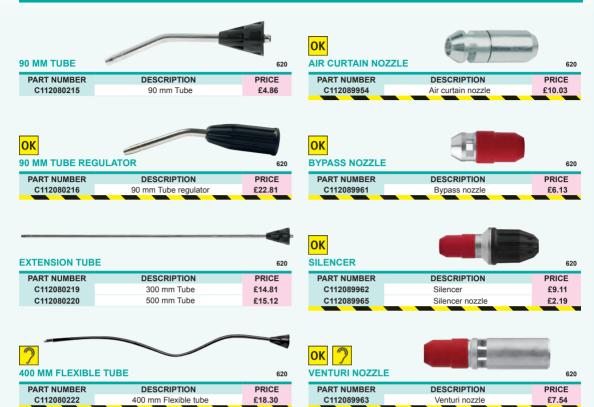



DESCRIPTION	PRICE
14 mm Rubber tip	£6.20
25 mm Rubber tip	£7.81
35 mm Rubber tip	£12.29
3 Piece rubber tip kit	£22.51
	14 mm Rubber tip 25 mm Rubber tip 35 mm Rubber tip

**RUBBER TIP NOZZLE** 



PART NUMBER	DESCRIPTION	PRICE
C112089955	Translucent shield diameter 100 mm	£5.52

#### NOZZLES FOR USE WITH C112080000 / C112083200





OK

#### **MULTIFLOW AIR AND FLUID GUN**



620

#### DESCRIPTION

CEJN's new MultiFLOW blowgun effectively cleans surfaces with air or water with unparallelled blowing force. Precise flow is achieved by adjustable flow settings. Nozzle adjusts from narrow jet to wide beam. The MultiFLOW meets and exceeds OSHA safety standards when dead-ended.

#### FEATURES / BENEFITS

- · Unmatched blowing force
- Adjustable flow control
   Adjustable beam

Aujustable bealti	
SPECIFICATIONS	
Air flow	200 - 1200 l/min (7 - 42 CFM)
Fluid flow	5 – 25 l/min (1.1 – 5.5 GPM UK)
Air sound level	79 – 101 dBA
Max working pressure	16 bar (232 psi)
Min burst pressure	64 bar (928 psi)
Temperature range 16 bar	-20°C to +60°C (-4°F to +140°F)
Temperature range 10 bar	-20°C to +80°C (-4°F to +176°F)
Media	Air and non-explosive water based liquids
MATERIALS	
Body	POM, TPE, aluminium

NBR (nitrile)

#### APPLICABLE SAFETY STANDARDS



Seal

The products with the "OK" symbol are compliant with the OSHA directive STD1-13.1 (1910-242(b). When dead ending occurs, static pressure at the main orifice shall not exceed 30 psi (2 bar).



The products with the "EAR" symbol are compliant with the International Standard ISO 4414 - Pneumatic Fluid Power and OSHA 1910.95 - Occupational Noise Exposure. These products have a sound level below 85 db(A) and meet the EU Machine Directive §1.5.8. concerning noise reduction demands.





**MULTIFLOW BLOW GUN** 620 PART NUMBER CONNECTION PRICE C112100400 320 Nipple £54.54



PART NUMBER CONNECTION PRICE C112100450 1/4" Adaptor £54.54



**MULTIFLOW DISPLAY PACK EIGHT PACK** 

PART NUMBER CONNECTION PRICE C112109981 1/4" Adaptor £436.24

£57.21

#### **MULTIFLOW AIR AND FLUID GUN**





#### **MULTIFLOW BLOW GUN ACCESSORIES**



C112103152



1/4" BSPP

STAR TIP TUBE NUZZLE		620
PART NUMBER	DESCRIPTION	PRICE
C112100230	Star-Tip Nozzle	£19.71

#### **MULTIFLOW BLOW GUN ACCESSORIES**

C112100455

£60.93

£16.54


ADJUSTABLE FLUID NOZZLE



1/2" BSPP

#### **MULTIFLOW BLOW GUN ACCESSORIES**

C112100220



Straight Tube Nozzle

#### **MULTIFLOW BLOW GUN ACCESSORIES**



PART NUMBER	DESCRIPTION	PRICE
C112100200	Jet Nozzle	£14.09



#### DESCRIPTION

The Typhoon is Coilhose's most powerful standard blow gun, delivering up to 34 CFM (2500 series), 51 CFM (3800 series) and over three pounds of thrust at 125 psi. The Typhoon is ideal for heavy duty clean-up and blow-off, and its lightweight and sleek design make this gun a favourite.

#### FEATURES / BENEFITS

- Delivers up to 34 CFM at 125 psi
- · Lightweight and ergonomic
- · Variable flow trigger for control
- · Maximum flow for easy clean-up and blow-off
- · Integral hanging hook
- · Wide variety of tips and extensions available

SPECIFICATIONS	2500 Series	3800 Series
Sound level @ 125 psi	85 Db	80 Db
Flow rate @ 125 psi	34 CFM	51 CFM
Thrust	2.1 lbs	3.1 lbs





The products with the "OK" symbol are compliant with the OSHA directive STD1-13.1 (1910-242(b). When dead ending occurs, static pressure at the main orifice shall not exceed 30 psi (2 bar).



The products with the "EAR" symbol are compliant with the OSHA 1910.95 – Occupational Noise Exposure. These products have a sound level below 85 db(A).





PART NUMBER	DESCRIPTION	PRICE
CO-TYP2502	High flow tip blow gun	£23.80
CO-TYP2506	6" Extension & high flow tip blow gun	£28.86
CO-TYP2512	12" Extension & high flow tip blow gun	£31.76
CO-TYP2518	18" Extension & high flow tip blow gun	£33.21
CO-TYP2524	24" Extension & high flow tip blow gun	£34.05
CO-TYP2536	36" Extension & high flow tip blow gun	£38.99
CO-TYP2548	48" Extension & high flow tip blow gun	£40.34
CO-TYP2560	60" Extension & high flow tip blow gun	£43.37
CO-TYP2572	72" Extension & high flow tip blow gun	£46.22



3800 SERIES MULTI-JET TIP BLOW GUN KIT 3/8" NPT

PART NUMBER	DESCRIPTION	PRICE
CO-TYP3802	Multi-jet tip blow gun kit	£48.18



3800 SERIES
3/8" NPT
PART NUMBI

ок 🤊

PART NUMBER	DESCRIPTION	PRICE
CO-TYP3806	6" Extension & multi-jet tip blow gun	£52.15
CO-TYP3812	12" Extension & multi-jet tip blow gun	£54.52
CO-TYP3818	18" Extension & multi-jet tip blow gun	£55.62
CO-TYP3824	24" Extension & multi-jet tip blow gun	£56.73
CO-TYP3836	36" Extension & multi-jet tip blow gun	£62.60
CO-TYP3848	48" Extension & multi-jet tip blow gun	£66.38
CO-TYP3860	60" Extension & multi-jet tip blow gun	£69.48
CO-TYP3872	72" Extension & multi-jet tip blow gun	£70.24





I TPHOON PRO		2020
PART NUMBER	CONNECTION	PRICE
CO-TYP2502M	High flow safety blow gun	£39.82
CO-TYP2502M-06CN	6" Extension & high flow safety blow gun	£45.89
CO-TYP2502M-12CN	12" Extension & high flow safety blow gun	£46.25
CO-TYP2502M-24CN	24" Extension & high flow safety blow gun	£48.69
CO-TYP2502M-48CN	48" Extension & high flow safety blow gun	£58.01
CO-TYP2502M-60CN	60" Extension & high flow safety blow gun	£63.41
CO-TYP2502M-72CN	72" Extension & high flow safety blow gun	£65.85



#### **TYPHOON BLOW GUN ACCESSORIES**

#### **HIGH FLOW TIPS**

1/2" - 27 UNS THREAD



PART NUMBER	DESCRIPTION	PRICE
CO-HFN-00M	With male pipe thread	£5.02
CO-HFN-11M	Chrome plated – with male pipe thread	£10.95
CO-HFN-00F	With female pipe thread	£5.02
CO-EXT06CN	6" Extension high flow tip	£12.66
CO-EXT12CN	12" Extension high flow tip	£14.36
CO-EXT18CN	18" Extension high flow tip	£16.05
CO-EXT24CN	24" Extension high flow tip	£17.01
CO-EXT36CN	36" Extension high flow tip	£20.11
CO-EXT48CN	48" Extension high flow tip	£23.82
CO-EXT60CN	60" Extension high flow tip	£27.07
CO-EXT72CN	72" Extension high flow tip	£30.22

#### MULTI-JET TIPS 1/2" – 27 UNS THREAD



PART NUMBER	DESCRIPTION	PRICE
CO-MJN-O	Multi-jet tip	£21.23
CO-EXT06MJ	6" Extension multi-jet tip	£31.80
CO-EXT12MJ	12" Extension multi-jet tip	£33.00
CO-EXT18MJ	18" Extension multi-jet tip	£34.21
CO-EXT24MJ	24" Extension multi-jet tip	£35.76
CO-EXT36MJ	36" Extension multi-jet tip	£40.05
CO-EXT48MJ	48" Extension multi-jet tip	£43.92
CO-EXT60MJ	60" Extension multi-jet tip	£47.22
CO-EXT72MJ	72" Extension multi-iet tip	£50.29

Image shown is CO-EXR-1



	- 6.1	0.1	<b>~</b> • •	-
			ON	

1/2" – 27 UNS THREAD 20:		
PART NUMBER	DESCRIPTION	PRICE
CO-EXT-1	1" Extension & coupling	£4.64
CO-EXT-2	2" Extension only	£4.23
CO-EXT-6	6" Extension only	£6.91
CO-EXT-12	12" Extension only	£9.68
CO-EXT-18	18" Extension only	£11.02
CO-EXT-24	24" Extension only	£12.26
CO-EXT-36	36" Extension only	£15.32
CO-EXT-48	48" Extension only	£19.69
CO-EXT-60	60" Extension only	£23.58
CO-EXT-72	72" Extension only	£26.03

#### **CANNON EXTREME HIGH VOLUME BLOW GUNS**

#### FEATURES / BENEFITS

Suitable for anyone with an ample air supply (tow-behind compressor for mobile applications or large capacity compressor found in plants) and has a need to move heavy/stubborn debris. Also suitable for drying or cleaning several small orifices or indentations rapidly. Geared for, but not limited to, indoor use.

Operation/performance: Air consumption equals 120 CFM at 100 psi.



PART NUMBER	CONNECTION	PRICE
CO-9000-MJP	2" Extension model	£234.80
CO-9000-24MJP	24" Extension model	£264.96
CO-9000-48MJP	48" Extension model	£293.35

#### Materials

Die cast aluminium, machined brass and stainless steel body 3/4" NPT female thread port

Wear-points constructed of heat-treated and zinc plated steel tip



PART NUMBER	CONNECTION	PRICE
CO-9000-SP	2" Extension model	£243.51
CO-9000-24SP	24" Extension model	£219.22
CO-9000-48SP	48" Extension model	£224.29



#### **CEG 1 BLOW GUN RANGE**

#### DESCRIPTION

The CEG-1 is ergonomically designed to fit the natural contour of the user's hand, maximising comfort even during long term use. This gives the user a wider range of motion to direct the additional CEG-1 working capacity right where it's needed, resulting in increased blow-off efficiency.

#### FEATURES / BENEFITS

- The curve of the heavy duty steel lever and soft vinyl grip allows the thumb to rest in a natural position, allowing maximum comfort
- Full-size hanging hook makes the gun easy to store and use
- Unique thermoplastic wrap-around body cover maximises user comfort
- · OSHA compliant
- Maximum inlet 150 psi
- · Full size hanging hook makes the gun easy to store and use
- · Unique thermoplastic, wrap-around body cover maximises user comfort
- · OSHA compliant
- · Maximum inlet 150 psi

#### **MATERIALS**

- · Die cast zinc body
- 1/4" NPT female thread port
- Aluminium with black anodised sleeve tip
- · Nickel plated steel lever

#### APPLICABLE SAFETY STANDARDS



The products with the "OK" symbol are compliant with the OSHA directive STD1-13.1 (1910-242(b). When dead ending occurs, static pressure at the main orifice shall not exceed 30 psi (2 bar).



The products with the "EAR" symbol are compliant with the OSHA 1910.95 - Occupational Noise Exposure. These products have a sound level below 85 db(A).





**HIGH FLOW SAFETY NOZZLE** 



2020

PART NUMBER	CONNECTION	PRICE
CO-CEG-STH	Two stripe 1/4" BSPP	£3.78



PART NUMBER	CONNECTION	PRICE
CO-CEG-06-DPB	6" Extension	£6.15
CO-CEG-12-DPB	12" Extension	£8.04
CO-CEG-24-DPB	24" Extension	£10.26
CO-CEG-36-DPB	36" Extension	£12.76



PART NUMBER

CO-CEG-06SHP-DPB

CO-CEG-12SHP-DPB

CO-CEG-24SHP-DPB

CO-CEG-36SHP-DPR

CO-CEG-1HP



12" Extension

24" Extension

36" Extension

1/4" BSPP

PRICE £22 10 £24.18 £26.26 £28 58

£16.96

2020

#### **REDI-BURST POCKET BLOW GUN**

#### **FEATURES / BENEFITS**

- · Easily stored in pocket, tool belt or tool box
- · Designed for user comfort
- · Engineered to deliver the same performance as larger blow guns
- · Accepts standard 1/8" tips
- · Maximum inlet pressure of 150 psi

- · Die cast zinc (chrome plated) body
- 1/4" NPT female thread port



CO-RGB-S-11 Megaflow connector £12.91

#### **BLOW GUNS**



#### **BUTTON BLOW GUN FEATURES / BENEFITS**

- Compact design
- Economical alternative to lever operated and pistol grip types
- · Rugged construction withstands rough handling

#### IN-LINE BLOW GUN FEATURES / BENEFITS

- · Compact and durable with maximum flow
- Ideal for at-the-tool use
- · Chrome plated zinc body

#### APPLICABLE SAFETY STANDARDS



The products with the "OK" symbol are compliant with the OSHA directive STD1-13.1 (1910-242(b). When dead ending occurs, static pressure at the main orifice shall not exceed 30 psi (2 bar).



The products with the "EAR" symbol are compliant with the OSHA 1910.95 – Occupational Noise Exposure. These products have a sound level below 85 db(A).



PART NUMBER	DESCRIPTION	PRICE
CO-661	Rubber tip blow gun	£12.81



PART NUMBER	DESCRIPTION	PRICE
CO-641	In-line blow gun with rubber tip	£13.54



PART NUMBER	DESCRIPTION	PRICE
CO-665	Brass standard tip blow gun	£12.80





#### **600 SERIES METAL BLOW GUNS**

2020



#### **FEATURES / BENEFITS**

- · Durable zinc die cast body
- · Ergonomic design and large operating lever to reduce fatigue and discomfort
- · Chrome plated finish for superior corrosion resistance

#### **SPECIFICATIONS**

OK

**SAFETY BLOW GUN** 

Pressure rating 10 bar (150 psi)

Temperature range 0°C to 80°C (32°F to 180°F)

#### APPLICABLE SAFETY STANDARDS

OK

The products with the "OK" symbol are compliant with the OSHA directive STD1-13.1 (1910-242(b). When dead ending occurs, static pressure at the main orifice shall not exceed 30 psi (2 bar).



The products with the "EAR" symbol are compliant with the OSHA 1910.95 – Occupational Noise Exposure. These products have a sound level below 85 db(A).



1/4" BSPT INLET X 1/8" NPSM OUTLET

PART NUMBER DESCRIPTION PRICE CO-600SDL Standard safety gun £11.04



**SAFETY BLOW GUN** 

1/4" BSPT INLET X 1/8" NPSM OUTLET

DESCRIPTION PRICE PART NUMBER CO-600STDL Tamperproof gun £13.29




PART NUMBER PRICE DESCRIPTION CO-600SB Safety booster gun £14.78



PART NUMBER DESCRIPTION PRICE CO-600SS Safety shield gun £18.19



PART NUMBER	DESCRIPTION	PRICE
CO-603S	3" Safety extension gun	£20.34
CO-606S	6" Safety extension gun	£21.98
CO-608S	8" Safety extension gun	£22.54
CO-610S	10" Safety extension gun	£24.48
CO-612S	12" Safety extension gun	£26.18
CO-616S	16" Safety extension gun	£29.81





## **SAFETY BLOW GUN**

1/4" BSPT INLET X 1/8" NPSM OUTLET

PART NUMBER	DESCRIPTION	PRICE
CO-600FF06	6" Flexible safety extension gun	£27.65
CO-600FF12	12" Flexible safety extension gun	£28.02

2020

## Nineteer

#### SAFETY TIPS FOR USE WITH CO-600NT1W


















2020



2020

#### **FEATURES / BENEFITS**

- · Durable zinc, die cast body
- Ergonomic design and large operating lever to reduce fatigue and discomfort
- · Chrome plated finish for superior corrosion resistance

SPECIFICATIONS	
Pressure rating	10 bar (150 psi)
Temperature range	0°C to 80°C (32°F to 180°F)



#### **STANDARD BLOW GUN**

1/4" BSPT INLET X 1/8" NPSM OUTLET

PART NUMBER	DESCRIPTION	PRICE
CO-600NT1W	Basic gun	£10.73

Meets OSHA requirements when used with safety tips



1/4 DOPT INLET	A 1/6" NPSWI OUTLET	2020
PART NUMBER	DESCRIPTION	PRICE
CO-602	Siphon tip gun	£24.42



#### STANDARD BLOW GUN

1/4" BSPT INLET X 1/8" NPSM OUTLET

PART NUMBER	DESCRIPTION	PRICE
CO-601	Rubber tip gun	£13.25



1/4" BSPT INLET X 1/8" NPSM OUTLET

PART NUMBER	DESCRIPTION	PRICE
CO-801	Steel brush gun	£27.79
CO-802	Nylon brush gun	£27.26
CO-803	Horsehair brush gun	£27.26

#### REPLACEMENT TIPS



PART NUMBER	DESCRIPTION	PRICE
CO-SAT13	Rubber tip	£5.21
BRASS TIP	- minel	

BRASS TIP 1/8" NPSM		2020
PART NUMBER	DESCRIPTION	PRICE
CO-SAT15	Brass tip	£2.09







PART NUMBER	DESCRIPTION	PRICE
CO-811	Steel brush	£16.41
CO-822	Nylon brush	£15.73
CO-833	Horsehair brush	£15.11



## **PARKAIR®**

#### **FEATURES / BENEFITS**

- · Heavy duty, rubber cover
- · Instantly adjustable spray pattern
- Watertight can be used inside or outside
- · Caustic and fat resistant

#### **SPECIFICATIONS**

**LOW PRESSURE** 

SELF CLOSING

PART NUMBER

RWG2

WATER GUN

Water pressure rating Up to 215 psi

Temperature rating Up to 80°C (Up to 175°F)

#### **FEATURES / BENEFITS**

- · All metal, water hose gun
- · Sturdy construction

· Release of handle provides instant shut-off





RJET1

Part supplied with 3/4" & 1/2" hosetail adaptor

 BLOW GUN
 4630

 PART NUMBER
 DESCRIPTION PRICE

 ABG1-14
 1/4" BSP ports
 £8.05

#### **METAL BLOW GUN AND ACCESSORIES**



#### **FEATURES**

Manufactured from high quality die-cast alloy, giving the tool a long trouble free life.

#### **KEY PRODUCT BENEFITS**

- Robust and compact design
- · Supplied with a conical and safety nozzle
- · Display packed for convenience

#### PRODUCT SAFETY INFORMATION

Outlet pressure on blowguns should not exceed 2 bar/28lbf/in². It is therefore recommended that an in-line regulator is fitted to your air supply to ensure this.



OAI LIII NOLLI		0.
PART NUMBER	DESCRIPTION	PRICE
CO-BG605	Metal Blow Gun	£6.37

#### **FEATURES**

PCL's threaded (1/8" inlet) easy-to-fit nozzles are interchangeable, catering for all blow gun applications.



**SAFETY NOZZLE** 

PART NUMBER DESCRIPTION PRICE
CBGN461 Safety nozzle £2.97

8250



£1387.96

78

#### **AIR CURTAIN**

#### FEATURES AND BENEFITS

- 25:1 air amplification
- Up to 30 dBA noise reduction
- · Health and safety compliant
- · Low maintenance no moving parts
- · Ease of mounting flange running the entire length

- · Product drying
- · Product cooling
- · Swarf contamination removal
- · Air saving reduction of energy bills
- · Compressor demand reduction
- Noise reduction



**AIR CURTAIN** 

AIRM-A85071

**ALUMINIUM** 

PART NUMBER	LENGTH	THREAD SIZE	PRICE
AIRM-A85003	80 mm	1 x 1/4" BSPP	£157.19
AIRM-A85004	100 mm	1 x 1/4" BSPP	£214.38
AIRM-A85006	150 mm	1 x 1/4" BSPP	£217.45
AIRM-A85012	300 mm	1 x 1/4" BSPP	£277.61
AIRM-A85018	450 mm	1 x 1/4" BSPP	£339.30
AIRM-A85024	600 mm	2 x 1/4" BSPP	£404.05
AIRM-A85030	750 mm	2 x 1/4" BSPP	£493.50
AIRM-A85031	800 mm	2 x 1/4" BSPP	£524.39
AIRM-A85036	900 mm	2 x 1/4" BSPP	£542.86
AIRM-A85048	1200 mm	4 x 1/4" BSPP	£832.79
AIRM-A85055	1400 mm	4 x 1/4" BSPP	£953.06

1800 mm

6 x 1/4" BSPP

59 68 73 75

AIR AMPLIFIER																	
	041-4	Inlet Air				Aiı	r Cons	umptio	on					Sou	ind Lev	/el*	
Product Code Diameter (mm)	Pressure			cfm					l/min					dBA			
		psi	20	40	60	80	100	20	40	60	80	100	20	40	60	80	100
	(111111)	Bar	1.4	2.7	4.1	5.4	6.8	1.4	2.7	4.1	5.4	6.8	1.4	2.7	4.1	5.4	6.8
AIRM-A15004	9		3	5	8	10	11	85	142	227	283	311	73	82	86	88	90
AIRM-A15005	18		4	8	10	13	15	113	227	283	368	425	70	75	82	83	86
AIRM-A15008 & AIRM-A100008	32		8	11	13	15	17	227	311	368	425	481	59	73	76	79	83
AIRM-A15006	37		9	14	19	23	27	255	396	538	651	765	66	77	82	83	86
AIRM-A15015 & AIRM-A10015	51		13	18	22	25	28	368	510	623	708	793	59	69	75	78	83

30

15 21 26

## AIRM-A15030 & AIRM-A10030 **FEATURES AND BENEFITS**

• 4 to 25:1 air amplification - can cut compressed air demand by 70%

100

- Up to 30 dBA noise reduction
- · Health and safety compliant
- · Low maintenance no moving parts
- · Application specific set-up (no shims) fully adjustable

#### **APPLICATIONS**

- · Product redirection
- · Product drying
- · Air saving reduction of energy bills
- · Compressor demand reduction
- · Noise reduction
- · Product cooling
- · Blowing and vacuum applications

## **AIR AMPLIFIER**

34 425 595 736 850 963



#### STAINLESS STEEL

AIRM-A10008	32 mm	1/4" BSPP	£392.52
AIRM-A10015	51 mm	3/8" BSPP	£442.96
AIRM-A10030	100 mm	1/2" BSPP	POA

#### **HIGH THRUST JET**

#### **FEATURES AND BENEFITS**


- 4 to 6:1 air amplification
- Up to 30 dBA noise reduction
- · Health and Safety compliant
- · Low maintenance no moving parts
- · Application specific set-up
- · Cuts compressed air usage

#### **APPLICATIONS**

- · Air saving reduction of energy bills
- · Compressor demand reduction
- · Noise reduction
- · Swarf removal
- · Material conveying
- · Product drying
- · Product cooling

## **HIGH THRUST JET**





\* In-line high thrust jet





#### **SAFETY BLOW GUN**

#### DESCRIPTION

Meech Energy Saving Nozzles and Blow guns direct compressed air over a curved surface on the outside of the nozzle. This action entrains the ambient air and amplifies the total air flow. Meech Nozzles and Blow guns can save up to 70% of compressed air demand, whilst significantly reducing noise levels. They have hundreds of applications and will significantly reduce running costs.

#### **FEATURES AND BENEFITS**

- · 25:1 air amplification
- · Up to 30 dBA noise reduction
- Health and safety compliant
- · Low maintenance no moving parts
- · Application specific set-up
- Operator comfort ergonomic lightweight aluminium handle

#### **APPLICATIONS**

- · Air saving reduction of energy
- · Compressor demand reduction
- Swarf removal
- · Any blow gun task

#### SPECIFICATIONS

Inlet air pressure	Air consumption	Sound level
20 psi (1.4 bar)	5 cfm (142 lpm)	65 dBA
40 psi (2.7 bar)	9 cfm (255 lpm)	71 dBA
60 psi (4.1 bar)	12 cfm (340 lpm)	76 dBA
80 psi (5.4 bar)	15 cfm (425 lpm)	79 dBA
100 psi (6.8 bar)	18 cfm (510 lpm)	81 dBA



#### STAINLESS STEEL NOZZLE

PART NUMBER	THREAD SIZE	PRICE
AIRM-A45400-SS	1/4" BSPP	£60.98

#### 

ALUMINIUM NOZ	ZLE	
AIRM-A45400	1/4" BSPP	£25.69

**APPLICATIONS** 

· Noise reduction

· Parts ejection

· Swarf removal

· Cooling of parts

• Air saving - reduction of energy bills

· Compressor demand reduction

#### **ENERGY SAVING SAFETY NOZZLE**

#### **FEATURES AND BENEFITS**

- 25:1 air amplification
- Up to 30dBA noise reduction
- · Health and safety compliant
- · Low maintenance no moving parts
- · Application specific set-up
- · Fits two thread types

SPECIFICATIONS	ò	

Inlet air pressure	Air consumption	Sound level
20 psi (1.4 bar)	5 cfm (142 lpm)	65 dBA
40 psi (2.7 bar)	9 cfm (255 lpm)	71 dBA
60 psi (4.1 bar)	12 cfm (340 lpm)	76 dBA
80 psi (5.4 bar)	15 cfm (425 lpm)	79 dBA
100 psi (6.8 bar)	18 cfm (510 lpm)	81 dBA



#### **ADJUSTABLE PACK OF 5**

#### STAINLESS STEEL

PART NUMBER	THREAD SIZE	PRICE
AIRM-A40009-1/8	1/8" BSP Male	£214.99
AIRM-A40009-1/4	1/4" BSP Male	£214.99
A L LIBAINILIBA		

AIRM-A48009-1/8	1/8" BSP Male	£96.28
AIRM-A48009-1/4	1/4" BSP Male	£96.28

#### **COLDSTREAM AIR GUN**

#### DESCRIPTION

Coldstream Air Guns from Meech use compressed air to provide a cold air source commonly used for spot cooling. Available in adjustable and non-adjustable versions with a choice of knuckle trunking. The Coldstream Air Gun is capable of achieving temperatures that are over 40°C below the compressed air temperature.

#### **FEATURES AND BENEFITS**

- · Available in two sizes
- · Up to 30 dBA noise reduction Health and safety compliant
- · Low maintenance no moving parts
- Application specific set-up supplied with 4 generators
- Easy to install secure in place with a strong magnet

#### **APPLICATIONS**

- · Ultrasonic weld cooling
- Spot cooling
- · Component cooling
- Tool cooling



#### **ADJUSTABLE**

5700

PART NUMBER	SIZE	OUTLET	PRICE
AIRM-A60015A	280 mm x 54 mm	Single	£417.60
AIRM-A60015AY	280 mm x 54 mm	Double	£424.06

#### **NON-ADJUSTABLE**

AIRM-A60015	280 mm x 54 mm	Single	£391.81
AIRM-A60015Y	280 mm x 54 mm	Double	£406.30
AIRM-A60008	229 mm x 45 mm	Single	£414.14

#### **NEEDLE COOLER**

#### DESCRIPTION

Needle Coolers from Meech use compressed air to provide a cold air source. Combining a small vortex tube, hot-end silencer and flexible knuckle trunking that direct the cold air flow to the target. Typically used to cool sewing needles, a magnetic mounting bracket means the cooler can be fixed to virtually any metal surface. The Needle Cooler is capable of providing a cold air source up to 50°C below the compressed air temperature.

#### **FEATURES AND BENEFITS**

- · Stainless steel construction hard wearing
- Low maintenance no moving parts · Suitable for harsh environments
- · Easy direction of cold airflow
- · Quick and easy mounting magnetic base



#### **NEEDLE COOLER**

PART NUMBER	SIZE	OUTLET	PRICE
AIRM-A20503	148 mm x 45 mm	Single	£271.15
AIRM-A20504	148 mm x 45 mm	Double	£287.20

5700



#### **CABINET COOLER**

#### DESCRIPTION

Meech Air Technology Stainless Steel Cabinet Cooler Systems provide a cold air source to stop cabinets overheating and prevent ingress of contamination, such as dust or moisture. When compared to fans that are commonly found in cabinets, Meech Cabinet Cooling Systems provide the ideal cooling solution.

#### FEATURES AND BENEFITS

- · Alternative to traditional AC units
- Up to 30 dBA noise reduction
- · Health and safety compliant
- · Low maintenance no moving parts
- · Application specific set-up
- · Easy to install
- · Prevents dust entering the cabinet

#### **APPLICATIONS**

- · Industrial PC cooling
- · CCTV cooling
- · Cooling equipment on marine vessels
- Machine panel cooling
- · Cooling LCD touch screens



#### **CABINET COOLER UNIT**

PART NUMBER	INCLUDES	PRICE
AIRM-A70025	4 Generators	£487.75





#### **EX CABINET COOLER UNIT**

PART NUMBER	INCLUDES	PRICE
AIRM-A70025EX	4 Generators and 2.5 m of cooling tube	£612.15

#### **CABINET COOLER SYSTEM**

AIRM-A70325-24	24V Solenoid and thermostat	£677.10
AIRM-A70325-240	240V Solenoid and thermostat	£677.10
AIRM-A70325-110	110V Solenoid and thermostat	£677.60

#### **VORTEX TUBE**

#### DESCRIPTION

Meech Air Technology Stainless Steel Vortex Tubes convert compressed air into two airflows, one extremely cold and the other extremely hot. Vortex tubes have no moving parts and can produce a drop in temperature up to 50°C below the compressed air temperature, whilst hot air can be up to 50°C above compressed air temperature.

#### **FEATURES AND BENEFITS**

- Cold air to 50°C below compressed air temperature
- · Hot air to 50°C above compressed air temperature
- · Hard wearing manufactured from stainless steel
- · Maintenance free no moving parts
- · Accurate temperature control

#### **APPLICATIONS**

- · Spot cooling
- · Weld cooling · Plastic slitting
- · Product cooling
- · Foodstuffs cooling



#### **SMALL**

Р

PART NUMBER	AIR CONSUMPTION	DESCRIPTION	PRICE
AIRM-A20008	8 cfm	Refrig H	£246.70
AIRM-A21008	8 cfm	Cold L	£246.70

#### MEDIUM

AIRM-A20010	10 cfm	Refrig H	£293.81
AIRM-A21010	10 cfm	Cold L	£293.81
AIRM-A20015	15 cfm	Refrig H	£293.81
AIRM-A21015	15 cfm	Cold L	£293.81
AIRM-A20025	25 cfm	Refrig H	£293.81
AIRM-A21025	25 cfm	Cold L	£293.81
AIRM-A20035	35 cfm	Refrig H	£293.81
AIRM-A21035	35 cfm	Cold L	£293.81

#### **EXPERIMENTAL KITS**

#### DESCRIPTION

The Meech Experimental Kit incorporates a Meech Vortex Tube with a Cold End Silencer and a length of flexible knuckle trunking, which can be used to direct the air flow. The Experimental Kit also includes all 8 generators, that allows for the most flexible temperature and air consumption, perfect for applications that require changing cold air temperature

#### **FEATURES AND BENEFITS**

- · Low maintenance no moving parts
- · Suitable for a range of applications
- · No electricity costs
- Available in 2 sizes
- · Runs only on compressed air
- · Stainless steel construction hard wearing
- · Provided with full range of generators (temperature control)



#### **EXPERIMENTAL KITS**

#### HIGH AND LOW COLD FRACTION

`F		
`F		
`F		

PART NUMBER	AIR CONSUMPTION	SIZE	LENGTH	PRICE
AIRM-A20300	8 cfm	Small	239 mm	£338.58
AIRM-A20400	10 – 35 cfm	Medium	272 mm	£354.72

#### **FEATURES / BENEFITS**

- · Made from nylon 6 abrasive resistant material
- Low air consumption
- Hand held or static site
- · Blow or vacuum

PART NUMBER

LVM22D/H

• Use filtered air @ 60 - 115 psi / 10 mm bore air-line


SPECIFICATIONS	LVM 22	LVM AP 22
CFM @ 60 psi	9 in / 54 out	9 in / 54 out
CFM @ 100 psi	14.5 in / 101.5 out	14.5 in / 101.5 out
Air inlet size	1/4" BSPT male	1/4" compression fitting
Conveying hose ID bore	32 mm	32 mm

#### SAFETY

We recommend that dry filtered compressed air and appropriate safety equipment is used with this product.

For optimum performance, the air feed line should be at least 3/8" ID bore.



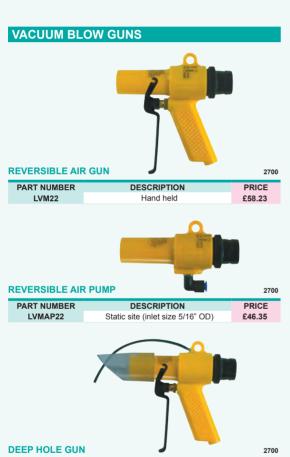

DESCRIPTION

For blind holes up to 450 mm deep

PRICE

£53.64



## **PARKAIR®**

#### **FEATURES**


- · Greatly reduces the incidence of repetitive strain injuries, such as carpal tunnel syndrome and back stress
- · Lightweight and streamlined design
- Two rotation points prevent kinking of the supply hose
- · Steel construction for maximum service life
- · Rotating joint is supplied with dust cover
- Full 7 mm flow

#### **APPLICATIONS**

- · Assembly operations in the automotive and electronic industries and spray painting
- · Mechanical joints for robotics

#### **SPECIFICATIONS**

Medium	Compressed air
Working temperature	-5°C to +60°C (+23°F to +140°F)
Max. working pressure	1Mpa (10.2 kgf/cm²) • 145 psi
Materials	Nickel plated steel, NBR seal



#### **NICKEL PLATED STEEL CENTRE COVER**

#### **NBR RUBBER CENTRE COVER**



#### **FEMALE THREAD**

X MALE THREAD PART NUMBER

CHNFAG2F-2M

DESCRIPTION PRICE 1/4" BSPT female x 1/4" BSPT male £23.52



X MALE THREAD

PART NUMBER CH3FA2M-2M

DESCRIPTION 1/4" BSPT male x 1/4" BSPT male

PRICE £28.71



#### **EURO STANDARD NIPPLE**

X MALE THREAD

PART NUMBER DESCRIPTION CHNFAP2M320 320 Nipple x 1/4" BSPT male 3450

3450

PRICE

£23.52

**EURO STANDARD NIPPLE** X MALE THREAD

PART NUMBER DESCRIPTION 3450

3450

PRICE

£34.16

£42.42

£44 89

PRICE CH3FAP3M320 320 Nipple x 3/8" BSPT male £28.70



#### **FREE ELBOW FITTING**

#### **FEMALE X FEMALE**

PART NUMBER	THREAD	PRICE
CH2HJ2F-2F	1/4" BSPT	£34.16
CH3HJ3F-3F	3/8" BSPT	£42.42
CH4HJ4F-4F	1/2" BSPT	£44.89

#### **FREE ELBOW FITTING**

#### MALE X FEMALE

PART NUMBER THREAD CH2HJ2M-2F 1/4" BSPT Male x 1/4" BSPT Female CH3HJ3M-3F 3/8" BSPT Male x 3/8" BSPT Female 1/2" BSPT Male x 1/2" BSPT Female CH4HJ4M-4F



#### FREE ANGLE FITTINGS



3450



X FEMALE THREAD



#### **EURO STANDARD NIPPLE**

X MALE THREAD

PART NUMBER	DESCRIPTION	PRICE
CO-11-04BS	320 Nipple x 1/4" BSPT	£23.22



#### **FLEX TYPE A FEATURES**

- High impact resistant composite housing 7 Models selected for a load range from 0 to 3.5 kg
- · Adjustable spring load throughout and ergonomic handgrip knob
- Adjustable rope stroke
- · Available with nylon braided rope or steel braided, nylon coated wire
- · Tools in conformity with CE directives



#### **FLEX TYPE A**

#### **NYLON BRAIDED ROPE**

PART NUMBER	LOADING CAPACITY	WEIGHT	CORD LENGTH	PRICE
SF0-05	0 – 0.5 kg	0.3 kg	2.3 m	£53.63
SF05-1	0.5 – 1 kg	0.35 kg	2.3 m	£53.63
SF1-2	1 – 2 kg	0.4 kg	2.3 m	£53.63
SF2-35	2 – 3.5 kg	0.4 kg	2.3 m	£53.63

#### FLEX TYPE B FEATURES

- Metal housing
   14 Models selected for a load range from 0.5 to 11 kg
- · Adjustable spring load throughout and safety removable handle
- Adjustable rope stroke
- · Available with nylon braided rope or steel braided, nylon coated wire
- · Tools in conformity with CE directives



4610

#### **FLEX TYPE B**

#### **NYLON ROPE**

4610

PART NUMBER	LOADING CAPACITY	WEIGHT	CORD LENGTH	PRICE
FLEX05-1	0.5 – 1 kg	0.6 kg	2.3 m	£55.18
FLEX05-15	0.5 – 1.5 kg	0.6 kg	2.3 m	£55.18
FLEX1-2	1 – 2 kg	0.65 kg	2.3 m	£55.18
FLEX2-35	2 – 3.5 kg	0.65 kg	2.3 m	£55.18

#### STEEL BRAIDED NYLON COATED WIRE

FLEX05-1A	0.5 – 1 kg	0.6 kg	2.3 m	£58.75
FLEX05-15A	0.5 - 1.5 kg	0.6 kg	2.3 m	£58.75
FLEX1-2A	1 - 2 kg	0.65 kg	2.3 m	£58.75
FLEX2-35A	2 - 3.5 kg	0.65 kg	2.3 m	£58.75
FLEX3-6A	3 - 6 kg	1.64 kg	2.3 m	£89.28
FLEX5-85A	5 - 8.5 kg	1.7 kg	2.3 m	£89.28
FLEX8-11A	8 - 11 kg	1.75 kg	2.3 m	£89.28

#### FLEX TYPE C FEATURES

- · Metal housing
- 10 Models selected for a load range from 1 to 70 kg
- · Adjustable spring load
- Adjustable rope stroke
- · Steel rope
- Safety device against spring break off
- Tools in conformity with CE directives



#### **FLEX TYPE C**

PART NUMBER	LOADING CAPACITY	WEIGHT	CORD LENGTH	PRICE
FLEX-3	1 – 3 kg	1.4 kg	1.5 m	£96.10
FLEX-5	3 – 5 kg	1.5 kg	1.5 m	£96.10
FLEX-9	5 – 9 kg	3.4 kg	1.5 m	£257.30
FLEX-15	9 – 15 kg	3.8 kg	1.5 m	£257.30
FLEX-22	15 – 22 kg	7.2 kg	1.5 m	£381.30
FLEX-30	22 – 30 kg	8.5 kg	1.5 m	£381.30
FLEX-40	30 – 40 kg	9.8 kg	1.5 m	£517.70
FLEX-50	40 – 50 kg	10.4 kg	1.5 m	£517.70
FLEX-60	50 – 60 kg	11.6 kg	1.5 m	£536.30
FLEX-70	60 – 70 kg	11.8 kg	1.5 m	£551.80

#### MATIC FEATURES

- · Composite housing
- 3 Models selected for a load range from 0.5 to 5 kg
- Adjustable spring load6.5 x 10 mm soft braided polyurethane hose
- · Adjustable hose stroke
- · Tools in conformity with CE directives



#### MATIC

4610

PART NUMBER	LOADING CAPACITY	WEIGHT	CORD LENGTH	PRICE
MATIC15	0.5 – 1.5 kg	1.6 kg	1.6 m	£168.95
MATIC30	1.5 – 3.0 kg	1.7 kg	1.6 m	£168.95
MATIC50	3.0 - 5.0 kg	1.8 kg	1.6 m	£168.95

Matic hose diameter internal 6.5 / external 10





#### **HIGH QUALITY**

CEJN's high quality hose and cable reels contain a CEJN polyurethane hose or rubber cable. The reels are easy to manoeuvre and can be ceiling or wall-mounted and offer full, 300 degree, movement. A robust exterior housing protects the hose or cable and reel mechanism and the feeding action works flawless and tangle free. A stop function can be activated if full continuous feeding is not necessary at the time.

#### **FEATURES AND BENEFITS**

- · Slow Retract
- · Hose Guide
- · Lowest Pressure Drop in the Market
- · Quicker Hose Change
- · New Hose Stopper

#### **SPECIFICATIONS**

PART NUMBER	MAX. WORKING PRESSURE	TEMPERATURE RANGE	MEDIA
C199112083	16 bar	-20°C - +60°C	Air
C199112183	16 bar	-20°C - +60°C	Air
C199112020	16 bar	-20°C - +60°C	Air
C199112022	16 bar	-20°C - +60°C	Air
C199112120	16 bar	-20°C - +60°C	Air
C199112130	16 bar	-20°C - +60°C	Air
C199112132	16 bar	-20°C - +60°C	Air
C199112140	12 bar	-20°C - +60°C	Air
C199112040	12 bar	-20°C - +60°C	Air
C199112150	12 bar	-20°C - +60°C	Air
C199112230	16 bar	5°C - +60°C	Water
	io par	5 0 - +60 0	
C199112240	12 bar	5°C - +60°C	Water

#### **COMPRESSED AIR HOSE REELS**



PART NUMBER	ID X OD	LENGTH	PRICE
C199112082	8 x 12 mm	10 m	£285.38
C199112182	8 x 12 mm	17 m	£331.17

#### 1/4" BSPT MALE CONNECTION

C199112020	8.0 x 12.0 mm	7 m	£235.81
C199112022	8.0 x 12.0 mm	10 m	£285.13
C199112120	8.0 x 12.0 mm	17 m	£330.90
C199112130	9.5 x 13.5 mm	14 m	£338.48

#### 1/4" BSPT ANTISPARK CONNECTION

C199112132

1/2" BSPT MALE CONNECTION						
C199112140	11 x 16 mm	12 m	£387.92			
C199112040	11 x 16 mm	5 m	£294.39			
C199112150	13 x 18 mm	10 m	£393.16			

14 m

£361.28

9.5 x 13.5 mm

#### **WATER HOSE REELS**



WATER HOSE REEL 1/4" BSPT CONNECTION



1/2" BSPT CONNECTION

C199112240	11 x 16 mm	12 m	£392.04

#### **ELECTRIC HOSE REELS**



610



**ELECTRIC HOSE REEL** 

SCHUKU PLUG			610
PART NUMBER	ID X OD	LENGTH	PRICE
C199112310	3 x 1.5 mm	17 m	£426.34
CH PLUG			
C199112311	3 x 1.5 mm	17 m	£426.34

#### **ELECTRIC REELS – PREMIUM SERIES**

#### **FEATURES / BENEFITS**

- IP 42 environment tested
- · Red LED power indicator
- Rubber / neoprene cable H07RN-F comfortable handling even at very low temperatures
- True rollable working length store the cable completely back to the reel
- Revolving hinge with 200° rotation easy to reach your application accurately

SPECIFICATIONS	360 Series	362 Series
Hose	Rubber	Rubber
Feeder cable length	1 m (3 ft)	1 m (3 ft)
Power capacity	2300W / 10A	3000W / 13A
Temperature range	-20°C to +60°C	-20°C to +60°C







PART NUMBER	DIMENSIONS	CABLE LENGTH	POWER	PRICE
ST360.1000	3 x 1.5 mm <sup>2</sup>	6 m	2300W	£212.00
MEDIUM - 362 SE	RIES			
ST362 1000	3 v 1 5 mm <sup>2</sup>	15 m	3000///	£200 40

#### AIR HOSE REELS - PREMIUM SERIES

#### **FEATURES / BENEFITS**

- · Casting made in shockproof PP/Polypropylene suitable for tough environments
- Ultra-lightweight & soft PU braided hose comfortable handling even at very low temperatures
- True rollable working length store the hose completely back to the reel Full-flow axle design
- Revolving hinge with 200° rotation easy to reach your application accurately

SPECIFICATIONS	314 Series	315 Series
Hose	100% PUR (soft Ester)	100% PUR (soft Ester)
Feeder hose length	1 m (3.3 ft)	1.5 m (5 ft)
Capacity (at $\Delta$ 0.5 bar)	290 l/min (4.8 l/sec)	<600 l/min (10 l/sec)
Thread in / out	1/4"-1/4" BSPT	1/4"-1/4" BSPT
Temperature range	-20°C to +60°C	-20°C to +60°C







IALL - 014 OLI	IILO		•	2010
PART NUMBER	SIZE ID X OD	HOSE LENGTH	WORKING PRESSURE	PRICE
ST314.1000	6.5 x 10.0 mm	6 m	16 bar	£219.20

#### **MEDIUM - 315 SERIES**

ST315.1001	8.0 x 12.0 mm	10 m	16 bar	£292.00
ST315.1101	9.5 x 13.0 mm	9 m	16 bar	£292.00

#### STEEL CASING AIR HOSE REELS - PREMIUM SERIES

#### **FEATURES / BENEFITS**

- All mechanical parts made in metal suitable for very tough environments
- Ultra-lightweight & soft PU braided hose comfortable handling even at very low temperatures
- True rollable working length store the hose completely back to the reel
- · Full-flow axle design
- Revolving hinge with 200° rotation easy to reach your application accurately

SPECIFICATIONS	320 Series
Hose	ST320.1000 - 100% PUR (soft Ester)
Feeder hose length	1.5 m (5 ft)
Capacity (at $\Delta$ 0.5 bar)	<600 l/min (10 l/sec)
Thread in / out	1/4" - 1/4" BSPT
Temperature range	-30°C to +60°C



STEEL CASING AIR HOSE REELS





PART NUMBER	SIZE ID X OD		PRESSURE	PRICE
ST320.1000	9.5 x 13.0 mm	12 m	20 bar	£473.60

#### SAFETY STEEL AIR HOSE REELS WITH HOSEGUARD

#### **FEATURES**

- · Hose reel, with integrated air fuse, mounted directly on the inlet side of the reel
- · Open reel design, in all steel and stainless steel/brass axle, suitable for tough environments
- · Full flow, ultra lightweight PU braided hose for industrial environments
- · High grade, heavy duty rubber hose for grinding or other spatter
- Full flow axle design, highly suitable for tools up to 25 l/sec

#### **SPECIFICATIONS**

Hose	ST320.3000 100% Ester PUR
Capacity (at $\Delta$ 0.5 bar)	<760 l/min (12 l/sec)
Temperature range	-20°C to +60°C
Thread in / out	1/4" - 1/4" BSPT



PA







SAFETY STEEL AIR HOSE REEL WITH HOSEGUARD

ART NUMBER	SIZE ID X OD	HOSE LENGTH	WORKING PRESSURE	PRICE
ST320.3000	9.5 x 13 m	12 m	20 bar	£516.40

#### STEEL OPEN REELS - PREMIUM SERIES

#### **FEATURES / BENEFITS**

- Open reel design in all steel with brass axle suitable for tough environments
- Ultra lightweight PU braided hose for industrial environments or high grade and lightweight, heavy duty rubber hose - for grinding or other spatter environments
- Full flow axle design
- True rollable working length
- Revolving hinge easy to reach your application accurately

#### **SPECIFICATIONS**

Capacity (at $\Delta$ 0.5 bar)	<1500 l/min (25 l/sec)
Thread in / out	3/8" - 3/8" BSPT
Temperature range	-30°C to +60°C





## STEEL OPEN REELS - ESTER-PUR HOSE

#### **MEDIUM - 334 SERIES**

PART NUMBER	SIZE ID X OD	HOSE LENGTH	WORKING PRESSURE	PRICE
ST334.1000	10 x 14 mm	15 m	20 bar	£583.60
1 A D O E	NEO.			

LARGE - 335 SERIES					
ST335.1000	13 x 18 mm	15 m	20 bar	£685.20	





STEEL OPEN REELS **RUBTECH RUBBER HOSE MEDIUM - 334 SERIES** 

PART NUMBER	SIZE ID X OD	HOSE LENGTH	WORKING PRESSURE	PRICE
ST334.1100	10 x 17 mm	15 m	20 bar	£593.20

LARGE - 335 SEF	RIES			
ST335.1100	13 x 20 mm	15 m	16 bar	£704.00

#### STEEL OPEN REELS - BARE REELS

MEDIUM - 334 SERIES

MEDIONI - 004 CEIVIEC			MARRANTY	201
PART NUMBER	SIZE	HOSE LENGTH	THREAD IN	PRICE
ST334.7000	10 / 13 / 16 mm	180 m	3/8" BSPP	£435.60

LARGE - 335 SE	RIES			
ST335.7000	10 / 13 / 16 mm	20 m	3/8" BSPP	£495.60

#### **SWIVEL BASE**

#### FOR PREMIUM OPEN REELS



2810

PART NUMBER	DESCRIPTION	PRICE
ST395.1065	For use with Series 334 and 335 reels	£65.20

#### 2 MTR LEAD HOSE - FLEXIBLE CUT

#### **ULTRAFLEX PUR HOSE**



#### **RUBTECH RUBBER HOSE**

ST395.1070	10 x 17 mm	334	£46.80
ST395.1072	13 x 20 mm	335	£51.60

#### PORTABLE HOSE REELS - PREMIUM SERIES

#### **FEATURES**

- · Lightweight design
- · Wide stand base with rubber buffers
- · Twice the airflow of comparable handreels
- · Wall mount adapter included

SPECIFICATIONS	ST301.1000
Hose	100% Ester - PUR
Feeder hose length	1.5 m (5 ft)
Capacity (at $\Delta$ 0.5 bar)	<500 l/min (8.3 l/sec)
Thread in / out	1/4" BSPP
Temperature range	-30°C to +60°C
LARGE .	



## PORTABLE HOSE REELS

STANDARD PRESSURE

PART NUMBER	SIZE ID X OD	HOSE LENGTH	WORKING PRESSURE	PRICE
ST301.1000	9.5 x 13.0 mm	25 m	16 bar	£277.20

#### **SAFETY OPEN HOSE REELS**

#### **FEATURES**

- Open reel design in all steel and stainless steel axle (AISI 304)
- · Suitable for tough environments
- · Full flow, ultra lightweight PU braided hose
- · For industrial environments
- · High grade, heavy duty rubber hose
- · For grinding or other spatter environments · Full flow swivel / axle design with PU Ether gasket
- · Highly suitable for tools up to 25 l/sec
- Up to 18 m true rollable working length

SPECIFICATIONS	Ester PU Airhose	Rubtech
Hose	ST334.3000 100% Ester-PUR	ST334.3100 100% Rubtech
Capacity (at $\Delta$ 0.5 bar)	<900 l/min (15 l/sec)	<900 l/min (15 l/sec)
Temperature range	-30°C to +70°C	-30°C to +60°C
Thread in / out	3/8" BSPT	3/8" RSPT



#### SAFETY OPEN HOSE REEL

#### WITH HOSEGUARD

PART NUMBER	SIZE ID X OD	HOSE LENGTH	WORKING PRESSURE	PRICE
ST334.3000	10 x 14 mm	15 m	20 bar	£668.80
ST334.3100	10 x 17 mm	15 m	20 bar	£669.20

SPECIFICATIONS	Ester PU Airhose	Rubtech
	ST335.3000	ST335.3100 / 3103
Hose	100% Ester PUR	100% Rubtech
Capacity (at $\Delta$ 0.5 bar)	<1500 l/min (25 l/sec)	<1500 l/min (25 l/sec)
Temperature range	-20°C to +60°C	-30°C to +70°C
Thread in / out	3/8" BSPT	3/8" BSPT
Feeder hose length	2 m	2 m





#### WITH HOSEGUARD

PART NUMBER	SIZE ID X OD	HOSE LENGTH	WORKING PRESSURE	PRICE
ST335.3000	13 x 18 mm	15 m	20 bar	£771.20
ST335.3100	13 x 20 mm	15 m	16 bar	£789.60
ST335.3103	10 x 17 mm	20 m	20 bar	£789.60

#### **PRO-SERIES AIR / WATER HOSE**

#### **FEATURES / BENEFITS**

- · High impact, UV stabilised polypropylene construction
- · All units come complete with fitted main hose assembly and 2 metre connecting / feedhose
- Fixed or 180° pivoting wall bracket
- All units, as standard, include the Helix Ultra Coil® technology self layering hose system
- · Lightweight material construction
- · Suitable for both compressed air and water
- Fold flat carry handle
- · Hose guard supplied
- · Swivel outlet fitting on all compressed air units
- · Solid brass main swivel shaft and hose fittings
- 2 Year manufacturer's warranty (excludes hose assemblies and seals)

SPECIFICATIONS	15 Series	20 Series	
Air / water hose	C/W 15 m x 12.5 mm	C/W 20 m x 10 mm	
Hose material	Reinforced PVC braided (red)		
Reel / case type	Polypropylene		
Weight	9 kg		
Max working pressure	300 psi (20 bar)		
Max working temperature	40°C / 140°F		



4040

#### **AIR / WATER HOSE REELS**

15 SERIES

2 YEAR

WARRANTY

HOSE HOSE PART NUMBER INI FT **OUTLET** PRICE 1/2" BSP 1/2" BSPT HR-PS15-12AW 12.5 mm 18.5 mm female male £159.00

brass swivel brass swivel

#### 20 SERIES

HR-PS20-10AW	9.5 mm	16 mm		3/8" BSPT male brass swivel	£163.00
			DIGGG SWIVE	DIGGG SWIVE	

#### **SERIES 20 WATER HOSE**

#### **FEATURES / BENEFITS**

- · High impact and weather resistant UV stabilised polypropylene construction
- Fully enclosed outer case protects hose and inner drum
- · Auto lock and auto rewind mechanism
- · Reinforced PVC braided hose with an additional 2 metre connecting hose
- · All units, as standard, include the Helix Ultra Coil® Technology self layering hose system
- Complete with fixed or 180° pivoting wall bracket
- · Quality brass hose connectors, tap fittings and water spray gun included
- · Lightweight material construction
- · Fold flat carry handle
- · Solid wall installation
- 2 Year manufacturer's warranty (excludes hose assemblies and seals)

SPECIFICATIONS	
Water hose	Nakoda Series C/W 20 m x 11.5 mm
Hose material	Heavy duty water hose
Reel / case type	Polypropylene
Weight	9 kg
Max working pressure	150 psi (10 bar)

Water Spray Gun included 2 YEAR

Max working temperature 60°C / 140°F



WATER HOSE REEL

WARRANTY

4040

PART NUMBER	HOSE ID	OD	INLET	OUTLET	PRICE
HR-PS20-12W	11.5 mm	16 mm	3/4" BSP male brass swivel		£99.00

#### **SLOW RETRACTION SAFETY HOSE REELS**

#### **FEATURES / BENEFITS**

- Reduced recoil speed can be adjusted on site to suit the operator / environment
- · Constructed in heavy duty, powder coated, mild steel or stainless steel
- · Twin pedestal design
- · Full width, roller guide assembly
- · Optional pivoting wall bracket
- 90°C working temperature
- · Durable nylon bearing assemblies

- 400 & 600 bar upgrades available
- · Supplied as bare reel (hose kits at extra cost)
- · Ribbed side arms for extra rigidity
- · Fully ported flow path for maximum product delivery
- · Externally mounted swivel assembly for easy service and maintenance
- · Long term spare parts availability
- · Latching of hose assembly at any desired length
- · 12 month manufacturer's warranty





PART NUMBER	HOSE ID	LENGTH	WORKING PRESSURE	PRICE
HR-AV1000FEBK	1/2"	15 m	200 bar	£718.27
HR-AV1100FEBK	1/2"	20 m	200 bar	£915.26
HR-AV3500FEBK	1/2"	30 m	200 bar	£1098.27
HR-AV6000FEBK	1/2"	50 m	200 bar	£1743.71
HR-AV1200FEBK	3/4"	10 m	80 bar	£839.88
HR-AV1300FEBK	3/4"	15 m	80 bar	£1052.67
HR-AV3501FEBK	3/4"	18 m	80 bar	£1128.67
HR-AV3502FEBK	3/4"	22 m	80 bar	£1350.52
HR-AV3503FEBK	3/4"	30 m	80 bar	£1432.67



4045





PART NUMBER	HOSE ID	LENGTH	WORKING PRESSURE	PRICE
HR-AV1000BK	1/2"	15 m	200 bar	£1057.41
HR-AV1100BK	1/2"	20 m	200 bar	£1137.68
HR-AV3500BK	1/2"	30 m	200 bar	£1396.40
HR-AV6000BK	1/2"	50 m	200 bar	£2040.66
HR-AV1200BK	3/4"	10 m	80 bar	£1098.27
HR-AV1300BK	3/4"	15 m	80 bar	£1402.26
HR-AV3501BK	3/4"	18 m	80 bar	£1387.07
HR-AV3502BK	3/4"	22 m	80 bar	£1495.30
HR-AV3503BK	3/4"	30 m	80 bar	£1615.07



4030

4030

#### **GEN III SERIES**

#### **FEATURES / BENEFITS**

- · Durable yet economical
- · Lightweight and easy to operate
- Manufactured from tough, corrosion proof, composite materials
- · Heavy duty swivel reduces possible cracking in freezing conditions
- · Multi position locking mechanism which, when released, provides a complete, positive retraction every time
- Hotwash reels for use in food preparation and food processing areas
- Garden hose complete with 2 m side connection hose and inlet fitting
- Barrier reels are the ideal way to quickly set up personnel safety barriers



#### **GARDEN REELS** 1/2" CONNECTION

WORKING PART NUMBER HOSE ID LENGTH

PRICE PRESSURE 18 m RC-G1218-001 12 mm / 1/2" 10 bar £242.19



#### **BARRIER REELS**

PART NUMBER	WEBBING WIDTH	WEBBING LENGTH	END FITTING	PRICE
RC-BAR5020-001	50 mm	20 m	Sewn loop	£884.52



LOW PRESSURE AIR **AND WATER REELS** 

3/8" CONNECTION

PART NUMBER	HOSE ID	LENGTH	WORKING PRESSURE	PRICE
RC-AW820-001	8 mm / 5/16"	20 m	17 bar	£562.31
RC-AW1020-001	10 mm / 3/8"	20 m	17 bar	£570.73

1/2" CONNECTION

RC-AW1218-001	12 mm / 1/2"	18 m	17 bar	£577.05



**HOTWASH REELS** 

1/2" CONNECTION

PART NUMBER	HOSE ID	LENGTH	WORKING PRESSURE	PRICE
RC-HW1215-001	12 mm / 1/2"	15 m	10 bar	£621.27

Hotwash Reel working temperature 80°C

#### **WELDING AND CUTTING REELS**

#### FEATURES / BENEFITS

- · Full flow swivel
- Viton seals
- · Powder coated for durability
- · High quality
- · Independent dual swivel
- · Heavy gauge steel



**WELDING / CUTTING REELS** 

PART NUMBER	HOSE ID X OD	LENGTH	WORKING PRESSURE	PRICE
RC-OA615-001	6 x 14 mm	15 m	14 bar	£703.41
RC-OA815-001	8 x 16 mm	15 m	14 bar	£732.89

#### **RETRACTA SERIES**

#### REDASHE WARRANTY DETAILS

All products supplied by Redashe are warranted from one to 10 years, depending on manufacturer. Hose supplied by Redashe carries the warranty as listed by the manufacturer. A flexible connection must be used between the hose reel and supply. Use of a solid connection will void the swivel warranty. Redashe meets the requirements of BS EN ISO 9001:2008. Certification of the system was obtained by BSI Quality Assurance on 9th December 1991, number 4601QM8001.

All warranties cover reel only and exclude any hose supplied.

#### REINFORCED PVC HOSE

#### FEATURES / BENEFITS

- Tough, corrosion free polypropylene construction
- · Supplied with fitted hose for specified application
- · Choice of lockable mounting brackets
- · Virtually maintenance free
- · Lightweight average just 10 kg, easy to install
- Full automatic hose rewind for neat and tidy storage
- · Low effort, easy-to-use rewind tension



#### **RED REEL COMPLETE WITH HOSE**

16 bar Working Pressure							
PART NUMBER	HOSE I	ENGTH	INLET SIZE	HOSE OUTLET	PRICE		
hAR100	3/8"	66 ft	3/8" BSPF	1/4" BSPM	£382.72		
hAR200	1/2"	50 ft	3/8" BSPF	3/8" BSPM	£404.90		

#### FOR BREATHING AIR

	12	bar Work	ing Pressure	9	
hBH100	3/8"	50 ft	3/8" BSPF	3/8" BSPM	£641.76





	10	bar Work	ing Pressure	9	
PART NUMBER	HOSE ID	LENGTH	INLET SIZE	HOSE OUTLET	PRICE
hCW400	1/2"	EO ft	2/0" DCDE	Para Haga	C4E0 00

#### **PVC HOSE**



PART N

4000

**GREEN REEL COMPLETE WITH HOSE** FOR GARDENS



4000

7 bar Working Pressure								
NUMBER	HOSE LENGTH		INLET SIZE	HOSE OUTLET	PRICE			
R100	1/2"	60 ft	3/8" BSPF	1/2" BSPM	£375.56			

#### **REINFORCED RUBBER HOSE**







10 bar Working Pressure							
PART NUMBER HOSE LENGTH			INLET SIZE	HOSE OUTLET	PRICE		
hHW100	1/2"	40 ft	3/8" BSPF	3/8" BSPM	£519.99		
FOR PROPANE							

	21 b	ar Work	ing Pressure	9			
hHW100P	3/8"	50 ft	3/8" BSPF	3/8" BSPM	£513.07		
EOD EOOD OHALITY WATER 95°C							

OK FOOD QUALITY WATER 95 C								
21 bar Working Pressure								
hFQ100	1/2"	40 ft	3/8" BSPF	1/2" BSPM	£549.11			

#### **REELWORKS 2752 / 2753 SERIES**

#### **FEATURES**

- Supplied with 15 m x 3/8" or 1/2" flexible, premium hybrid polymer hose Hose has no memory and lays flat when in use
- High quality, durable polypropylene housing
- · Fully automatic spring rewind
- Low effort, easy to use, rewind tension
- Integral pivoting wall bracket, swivels through 180°
- · Latching of hose at any length
- · Latching system can be set to free run if required
- Working pressure up to 300 psi (20 bar)



#### **COMPACT SPRING REWIND AIR REEL**



PART NUMBER	HOSE ID	LENGTH	INLET/ OUTLET	PRICE
hC2752	3/8"	15 m	3/8"	£148.17
hC2753	1/2"	15 m	1/2"	£158.71

#### **COXREEL HEAVY DUTY SPRING REWIND REELS**

#### FEATURES / BENEFITS

- · Heavy duty, steel construction with durable, blue powder finish
- Double supported, solid 1" steel axle
- Multi-position roller arm gives full range of mounting options
- Four direction, non-snag roller guides reduce hose wear
- 1/4" steel mounting base for maximum stability
- · Slotted and drilled mounting holes for easy installation



**REEL WITH HOSE** FOR AIR / WATER



4	0	(



WITHOUT HOSE



PART NUMBER	HOSE ID	HOSE OD	LENGTH	SWIVEL IN / OUT	PRICE
hPLPL350	3/8"	5/8"	50 ft	3/8" BSPF	£492.66
hSHL3100	3/8"	5/8"	100 ft	3/8" BSPF	£1043.41
hSHL450	1/2"	7/8"	50 ft	1/2" BSPF	£623.29
hSHL4100	1/2"	7/8"	100 ft	1/2" BSPF	£989.05
hSHL550	3/4"	1 1/8"	50 ft	3/4" BSPF	£1013.73
hSHL635	1"	1 7/16"	35 ft	1" NPTF	£1127.14

Supplied without hose

21 bar maximum pressure							
HOSE ID	HOSE OD	LENGTH	SWIVEL IN / OUT	PRICE			
3/8"	5/8"	50 ft	3/8" BSPF	£538.98			
3/8"	5/8"	100 ft	3/8" BSPF	£1127.67			
1/2"	7/8"	50 ft	1/2" BSPF	£686.68			
1/2"	7/8"	100 ft	1/2" BSPF	£1092.83			
3/4"	1 1/8"	50 ft	3/4" BSPF	£1132.21			
1"	1 7/16"	35 ft	1" NPTF	£1317.22			
	HOSE ID 3/8" 3/8" 1/2" 1/2" 3/4"	HOSE ID         HOSE OD           3/8"         5/8"           3/8"         5/8"           1/2"         7/8"           1/2"         7/8"           3/4"         1 1/8"	HOSE ID         HOSE OD         LENGTH           3/8"         5/8"         50 ft           3/8"         5/8"         100 ft           1/2"         7/8"         50 ft           1/2"         7/8"         100 ft           3/4"         1 1/8"         50 ft	HOSE ID         HOSE OD         LENGTH IN / OUT         SWIVEL IN / OUT           3/8"         5/8"         50 ft         3/8" BSPF           3/8"         5/8"         100 ft         3/8" BSPF           1/2"         7/8"         50 ft         1/2" BSPF           1/2"         7/8"         100 ft         1/2" BSPF           3/4"         1 1/8"         50 ft         3/4" BSPF			

#### FOR DIESEL

21 bar maximum pressure								
hSHL450D	1/2"	7/8"	50 ft	1/2" BSPF	£781.27			
hSHL4100D	1/2"	7/8"	100 ft	1/2" BSPF	£1303.21			
hSHL550D	3/4"	1 1/8"	50 ft	3/4" BSPF	£1268.65			
hSHL635D	1"	1 7/16"	35 ft	1" NPTF	£1364.10			

#### FOR FOOD INDUSTRY

21 bar maximum pressure							
hSHL450F	1/2"	7/8"	50 ft	1/2" BSPF	£876.06		
hSHL4100F	1/2"	7/8"	100 ft	1/2" BSPF	£1493.09		
hSHL550F	3/4"	1 1/8"	50 ft	3/4" BSPF	£1420.52		

#### FOR PRESSURE WASH

21 bar maximum pressure							
hMPL350P	3/8"	5/8"	50 ft	3/8" BSPF	£898.91		
hMPL3100P	3/8"	5/8"	100 ft	3/8" BSPF	£1353.42		

4000

#### FEATURES / BENEFITS

- Designed for industrial applications where longer lengths of hose are required
- · Heavy gauge, powder coated, steel construction
- · Ready for wall, floor or overhead installation
- · Direct crank action, combined with twin bearings, requires minimum rewind effort
- · Spring loaded locking pin prevents drum rotation when in use





PART NUMBER	HOSE ID	HOSE OD	LENGTH	SWIVEL IN / OUT	PRICE
h11254100	1/2"	7/8"	100 ft	1/2" BSPF	£519.84
h11254200	1/2"	7/8"	200 ft	1/2" BSPF	£532.32
h11255100	3/4"	1 1/4"	100 ft	3/4" BSPF	£643.81

Supplied without hose



_		-				
	PART NUMBER	HOSE ID	HOSE OD	LENGTH	SWIVEL IN / OUT	PRICE
	h11254100AW	1/2"	7/8"	100 ft	1/2" BSPF	£623.63
	h11254200AW	1/2"	7/8"	200 ft	1/2" BSPF	£755.03
	h11255100AW	3/4"	1 1/4"	100 ft	3/4" BSPF	£878.81



#### **1175 SERIES**

#### FEATURES / BENEFITS

- Designed for industrial applications where longer lengths of hose are required
- Heavy gauge, powder coated, steel construction
- · Ready for wall, floor or overhead installation
- · Direct crank action, combined with twin bearings, requires minimum rewind effort
- · Spring loaded locking pin prevents drum rotation when in use



**BARE REEL** WITHOUT HOSE

PART NUMBER	HOSE ID	HOSE OD	LENGTH	SWIVEL IN / OUT	PRICE
h11756100	1"	1 7/16"	100 ft	1" NPTF	£985.20

Supplied without hose





4000

21 bar maximum pressure								
PART NUMBER	HOSE ID	HOSE OD	LENGTH	SWIVEL IN / OUT	PRICE			
h11756100AW	1"	1 7/16"	100 ft	1" NPTF	£1372.61			
OD DIEGE!								

FOR	DI	IESE	ΞL
-----	----	------	----

4000

21 bar maximum pressure								
h11756100D	1"	1 7/16"	100 ft	1" NPTF	£1553.05			

Supplied without hose

#### 701 SERIES

#### **FEATURES / BENEFITS**

- · Lightweight and durable, just 12.5 kg
- Constructed in high-impact UV stabilised polypropylene
- Suitable for compressed air and water
- Integral wall/overhead mounting bracket
- · Fully automatic hose rewind for neat and tidy storage
- Complete with 15 m of PVC hose





PART NUMBER

hC705100

hC705200

hC701100

hC701200

**60°C MAXIMUM TEMPERATURE** 

HOSE ID

1/4"

5/16"

3/8"

1/2"



MAXIMUN

PRESSUR

12 har

12 bar

20 bar 20 bar

LENGTH

33 ft

25 ft

50 ft

50 ft

VI RE	PRICE
	£127.30
	£126.71
	£195.62
	£222.68

4000

#### **GARDEN HOSE REELS**

#### **FEATURES / BENEFITS**

- · Lightweight and durable just 12.5 kg
- Constructed in high impact UV stabilised polypropylene
- · Locking switch secures hose at any length
- · Spring fully encased and lubricated
- · Integral wall / overhead pivoting bracket
- · Non-snag rollers reduce hose wear
- · Complete with water gun





**60°C MAXIMUM TEMPERATURE** 



PART NUMBER	HOSE ID	LENGTH	MAXIMUM PRESSURE	PRICE
hC701-GAR	1/2"	65 ft	10 bar	£132.25

#### **808 SERIES**



#### **REEL WITH HOSE**

#### FOR LOW PRESSURE AIR / WATER



Black reel with red hose								
PART NUMBER	HOSE ID	LENGTH	MAX. PRESSURE	INLET / OUTLET	PRICE			
hC808350L	3/8"	50 ft	21 bar	3/8"	£305.94			
hC808450L	1/2"	50 ft	21 bar	1/2"	£406.92			

#### FOR MEDIUM PRESSURE AIR / WATER

Black reel with black hose					
hC808350M	3/8"	50 ft	155 bar	3/8"	£415.66
Light grey reel with red hose					
hC808450M	1/2"	50 ft	138 bar	3/8"	£462.00



#### **REEL WITHOUT HOSE**

#### SUITABLE FOR WELDING



Supplied without hose

#### **FEATURES / BENEFITS**

- · Corrosion resistant powder coating
- · Guide arm, adjustable handling, up to 9 positions
- · Multi-position ratchet lock



### **MOUNTING BRACKET**

#### 180° SWIVEL

PART NUMBER	DESCRIPTION	PRICE
hT15720	Heavy duty steel. For use with P & SH Series	£106.37
hT15725	Heavy duty steel. For size index 4 SH & size index 3 MP Series	£207.13
	hT15720	hT15720  Heavy duty steel. For use with P & SH Series Heavy duty steel. For size index

## MOUNTING BRACKET

4000



IVOTING		4000
PART NUMBER	DESCRIPTION	PRICE
hCP/B2 140	Steel wall bracket. For use with 809 Series	£41.21
hCP/B3 340	Heavy duty steel base unit. For use with 808, 809 and 820 Series	£50.07
hCP/B4 140	Steel wall bracket. For use with 808 Series	£44.17



#### FEATURES / BENEFITS

- · Heavy duty steel construction with corrosion resistant powder coating
- Multi position ratchet lock
- Spring fully enclosed and lubricated
  6 1/2" wide L-shaped base ensures stable support
- · Guide arm adjustable for handling up to 9 positions
- · Wall, ceiling or floor mounted



**REEL WITH HOSE** FOR LOW PRESSURE AIR / WATER



4000

PRICE

£236.42

PART NUMBER	HOSE ID	LENGTH	MAX. PRESSURE	INLET / OUTLET
hC809325L	3/8"	25 ft	21 bar	3/8"

#### 880 SERIES

#### FEATURES / BENEFITS

- · Non-snag roller guides reduce hose wear
- · Latching of hose at any length
- Corrosion resistant, powder coated finish, black as standard
- · Full flow, internal swivel assembly ensures maximum flow
- · Suitable for floor, wall, ceiling or vehicle mount
- · Fully automatic hose rewind for neat and tidy storage



**REEL WITH HOSE** FOR LOW PRESSURE AIR / WATER



4000

PART NUMBER	HOSE ID	LENGTH	MAX. PRESSURE	INLET / OUTLET	PRICE
hC8804100L	1/2"	100 ft	21 bar	1/2"	£678.33
hC880550L	3/4"	65 ft	21 bar	3/4"	£733.15
hC880650L	1"	50 ft	21 bar	1"	£751.85

#### 208 SERIES

#### FEATURES / BENEFITS

- · Constructed from tubular & formed steel for superior strength & durability
- Corrosion resistant, powder coated finish, black as standard
- Full flow, brass swivel assembly ensures maximum flow
- Suitable for floor, wall, workbench mounting, ideal for mobile applications
- · Spring loaded lock pin prevents hose from de-reeling



BARE REEL WITHOUT HOSE FOR LOW / MEDIUM PRESSURE AIR / WATER



4000

PART NUMBER	HOSE I	LENGTH	MAX. PRESSURE	INLET / OUTLET	PRICE
hC2083100H	3/8"	100 ft	207 bar	3/8"	£156.14
hC208465H	1/2"	65 ft	207 bar	1/2"	£152.97

#### **460 SERIES**

#### **FEATURES / BENEFITS**

- · Designed for applications where longer lengths of hose are required
- · Constructed in heavy, gauge powder coated steel
- · Full flow swivel joint
- · Open hose slot drum design, Oil-lite self lubricating bearings
- · Spring loaded lock pin prevents hose from de-reeling



**BARE REEL WITHOUT HOSE** 

FOR LOW / MEDIUM PRESSURE AIR / WATER

PART NUMBER

hC4603350H

hC4604270H

HOSE

ID

3/8

1/2"

350 ft

270 ft

207 bar



		400
MAX. SSURE	INLET / OUTLET	PRICE
07 bar	3/8"	£218.28

1/2" £215.10



- · Constructed in high impact UV stabilised polypropylene
- · Lightweight design, just 8.2 kg and 12.0 kg
- · Powder coated, integral wall/ceiling bracket
- · Latching of cable at any length or a free run option
- · Manually restorable circuit breaker
- · Fully automatic spring rewind

**FEATURES AND BENEFITS** 

- · Low effort, easy to use rewind tension
- · Virtually maintenance free
- · Supplied with 1.3 m inlet cable, 3 pin UK plug and socket



#### **COMPACT SPRING REWIND CABLE REEL**

PART NUMBER	LENGTH	CORE	MAX VOLTAGE	PRICE
hYRC2500	35 m	3 x 1.5 mm	240 v	£397.02
hYRC3500	20 m	3 x 1.5 mm	240 v	£501.47

#### **FEATURES AND BENEFITS**

- · Lightweight and durable, just 11 kg
- · Constructed in high impact UV stabilised polypropylene
- Supplied with 25 m x 3 core 1.5 mm cable
- 1.3 mm fitted inlet cable
- · Supplied with fitted pivoting wall bracket
- · Latching of cable at any length
- · Fully automatic spring rewind action
- · Fitted circuit breaker
- · Supplied with fitted UK plug and sockets
- 12 month manufacturer's warranty (excluding cable)



#### **POLYPROPYLENE SPRING REWIND CABLE REELS**

PART NUMBER	LENGTH	CORE	MAX VOLTAGE	PRICE
hC625-2500	25 m	3 x 1.5 mm	240 v	£176.33

#### 12/24/240 VOLT

#### **FEATURES AND BENEFITS**

- · Constructed in high impact UV stabilised polypropylene
- · Lightweight design, just 1.8 kg 2.0 kg
- Supplied with fitted H05VV-F cable
- · Powder coated, integral wall/ceiling bracket
- · Latching of cable at any length, or a free run option
- · Manually restorable circuit breaker
- · Fully automatic spring rewind
- · Low effort, easy to use rewind tension
- · Virtually maintenance free
- · Supplied with 1.3 m inlet cable, 3 pin UK plug and socket

#### **FEATURES AND BENEFITS**

- · Constructed in high impact UV stabilised polypropylene
- Lightweight design, just 3.5 kg 3.8 kg
- Supplied with fitted H05VV-F cable
- Powder coated, integral wall/ceiling bracket
- · Latching of cable at any length, or a free run option
- · Manually restorable circuit breaker
- Fully automatic spring rewind
- · Low effort, easy to use rewind tension
- · Virtually maintenance free
- · Supplied with 1.3 m inlet cable, 3 pin UK plug and socket



#### **SPRING REWIND CABLE REEL** 5 M

PART NUMBER	LENGTH	CORE	MAX VOLTAGE	PRICE
hYRC25	5 m	3 x 1.5 mm	240 v	£153.25



U IVI		•		₩ 400
PART NUMBER	LENGTH	CORE	MAX VOLTAGE	PRICE
hYRC100	10 m	3 x 1.5 mm	240 v	£200.50

#### **605 SERIES**

#### **FEATURES**

- · Compact, lightweight design
- · Supplied with 15 m of 3 core, 1.5 mm cable
- · Fitted inlet cable for connection to supply
- · Integral wall mounting swivel bracket
- · Latching of cable at any length
- · Fully automatic spring rewind
- · Low effort, easy to use rewind tension
- · Virtually maintenance free







PART NUMBER	CABLE LENGTH	VOLTAGE	AMPS IN / OUT	PRICE
hC605100	50 ft	240 V	3 / 10	£113.66

#### **CABLE / CORD REELS**

#### **FEATURES AND BENEFITS**

- Heavy gauge, powder coated, steel construction
- · Auto rewind easily wraps, stores & protects the cable
- Factory machined, cartridge style spring canister
  1" Solid steel milled axle with 1" oil-lite bronze bearings
- · Guide arm adjusts to wall, floor and overhead payout directions
- · Multi position latching assembly secures cable at any length
- · Non-corrosive, stainless steel spring pawl and zinc plated latching plate
- Supplied with 15 m x 3 core 2.5 mm artic cable · Supplied with 16A Male and Female plug and socket
- · All units tested prior to despatch
- UL & CE marked

#### **FEATURES AND BENEFITS**

- · Heavy duty, powder coated, steel construction provides a high quality chip resistant surface
- · Auto rewind easily wraps, stores and protects the cable
- · Multi position latching assembly secures cable at any length
- · Overloading protect function with circuit breaker built into rear housing
- · Guide arm adjusts to wall, floor and overhead payout directions
- 4 Roller non-snag cable guide
- 2 m Lead-in cable included
- CE approved



#### CABLE / CORD REEL

110 V

PART NUMBER	LENGTH	CORE	MAX VOLTAGE	PRICE
hSPC13L-110V	15 m	3 x 2.5 mm	110 v	£615.83



PART NUMBER	LENGTH	CORE	MAX VOLTAGE	PRICE
hC6888-380V-50	15 m	5 x 2.5 mm	380 v	£533.17

#### **CABLE REELS**

#### FEATURES AND BENEFITS

- · Constructed in ABS plastic
- · Latching of cable at any length
- · Fully automatic spring rewind
- · Low effort, easy to use rewind tension
- · Supplied with fitted cable
- · Virtually maintenance free
- Integral wall mounting swivel bracket



#### **CABLE / CORD REEL**

**ABS PLASTIC** 

PART NUMBER	LENGTH	CORE	MAX VOLTAGE	PRICE
hCPER-120	20 m	3 x 1.5 mm	240 v	£232.32



1366

#### **HOSE STORAGE**

#### **INCLUDES**

1 x Freestanding hose reel, 25 m of 12.5 mm hose, 1 x nozzle, 2 x hose connectors, 1 x waterstop, 1 x 3/4" / 1/2" tap connector.



#### **WALL MOUNTED**

**HOSE HANGER** 1366 PART NUMBER DESCRIPTION PRICE HZ2360 For 30 m of 12.5 mm hose £5.80

#### 30 M HOSE REEL WITH 25 M HOSE FREESTANDING

PART NUMBER	DESCRIPTION	PRICE
HZ2412	Freestanding hose reel	£66.09

#### **HOSE STORAGE PRO**

#### INCLUDES

Wheeled hose reel, 30 m of 12.5 mm Maxi Plus hose, 1 x nozzle, 2 x hose connectors, 1 x waterstop, 1 x 1" / 3/4" / 1/2" tap connector.



- Incomment

#### **60 M ASSEMBLED PLASTIC HOSE CART**

WITH 30 M HOSE

PART NUMBER DESCRIPTION PRICE HZ2434 Wheeled hose reel £89.82

#### **INCLUDES**

Enclosed freestanding or wall mounted hose reel with hose layering, 25 m of 12.5 mm Maxi Plus hose, 1 x nozzle, 2 x hose connectors, 1 x waterstop, 1 x 3/4" / 1/2" tap connector, wall fixings.



#### **COMPACT MANUAL REEL** 1366

WITH 25 M HOSE HZ2415

INCLUDES

PART NUMBER DESCRIPTION PRICE Enclosed hose reel £80.42

Wall mounted hose reel with automatic rewind. 20 m of 12.5 mm Maxi Pro hose and 2 m feeder hose. 1 x nozzle, 1 x hose connector, 1 x waterstop,

#### **HOSE STORAGE PLUS**

#### INCLUDES

Wheeled hose reel. 2 x PLUS hose end connectors.



#### **60 M ASSEMBLED METAL HOSE CART**

WITHOUT HOSE

ART NUMBER	DESCRIPTION	PRICE
HZ2437	Wheeled hose reel	£64.09

## **AUTO REEL**

1366

1366

WITH 20 M HOSE



PART NUMBER	INCLUDES
HZ2490	Wall mounted hose reel, automatic rewind

1 x 1" / 3/4" / 1/2" tap connector. With wall fixings.

PRICE £155.10

1366

#### **INCLUDES**

Wall mounted hose reel with geared, easy rewind and automatic hose layering, 40 m of 12.5 mm Maxi Pro hose and 2 m feeder hose. 1 x nozzle, 2 x hose connectors, 1 x waterstop, 1 x 3/4" / 1/2" tap connector. With wall fixings and corner hose guide



#### **WALL MOUNTED FAST REEL**

WITH 40 M HOSE

PART NUMBER	INCLUDES	PRICE
HZ2496	Wall mounted hose reel, geared, easy rewind	£136.93

#### **HOSE – WATERING RANGE**

# SUITABILITY • General purpose garden use • 10 year guarantee • Hard wearing SPECIFICATIONS Construction Four layer design: a smooth PVC inner layer to allow maximum flow, a thick PVC layer to add strength, a braided polyester layer to stop expansion of the hose and a tough PVC outer layer.

#### MAXI PLUS STARTER SET CONTAINS

- 1 x 30 m Maxi Plus general purpose braided hose
- 1 x 3/4" and 1/2" Tap connector to attach to an outside tap
- 1 x Hose end connector to attach the hose to the tap
- 1 x Aquastop connector to connect the end of the hose to the nozzle
- 1 x Spray nozzle





#### MAXI PLUS STARTER SET

12.5 mm DIA

PART NUMBER	DESCRIPTION	PRICE
HOZ-72309000	Hose and fitting starter set	£48.06



#### **HOSE END CONNECTORS**





LOCKABLE ON /	OFF TRIGGER	1300
PART NUMBER	DESCRIPTION	PRICE
HZ2676	5 Spray patterns: jet, cone, fast fill, flat spray and fine rose	£16.80



1366

#### **HOSE FITTINGS**



#### **OUTDOOR TAP CONNECTOR** 1" BSP

PART NUMBER DESCRIP HZ2158 For outdoor threaded taps

TION	PRICE
	1366

£5.37

1366



#### **OUTDOOR TAP CONNECTOR**

3/4" BSP / 1/2" BSP

ART NUMBER	DESCRIPTION	PRICE
HZ2175	For outdoor threaded taps	£5.01



#### Y CONNECTOR

PART NUMBER	DESCRIPTION	PRICE
HZ2293	Allows three hoses to be joined using 3 hose connectors	£5.63



#### HOSE REPAIR CONNECTOR

12.5 mm

P

PART NUMBER	DESCRIPTION	PRICE
HZ2100	For repairing damaged hose	£4.16



#### **DOUBLE MALE CONNECTOR**

PART NUMBER DESCRIPTION PRICE Allows two hoses to be joined H72291 £4.16 using 2 hose connectors

#### **HOSE FITTINGS - PLUS**

#### **HOSE END CONNECTOR**

HZ2050



1366 PRICE Soft touch filling £5.88 Flexible tail prevents kinking

#### **AQUASTOP CONNECTOR**

12.5 mm & 15 mm





PRICE

1366

1366 PRICE £7.71

1366

1366

PART NUMBER Valve shuts off water HZ2055 £7.01 when accessory is disconnected

#### **METAL HOSE FITTINGS - PRO**



#### **OUTDOOR TAP CONNECTOR**

3/4" BSP / 1/2" BSP

ART NUMBER	DESCRIPTION	PRICE
HZ2041	For outdoor threaded taps	£6.52



1366

#### **OUTDOOR TAP CONNECTOR**

1" BSP

PART NUMBER	DESCRIPTION	
HZ2042	For outdoor threaded taps	



**DOUBLE MALE CONNECTOR** 

PART NUMBER	DESCRIPTION	PRICE
HZ2044	Allows two hoses to be joined	£6.93





PART NUMBER DESCRIPTION PRICE HZ2043 For repairing damaged hose £8.57



12.5 MM & 15 MM



## AQ

12.5

UASTOP CONNECTOR 5 MM & 15 MM		AGEN TYPE IMP	3
ART NUMBER		DESCRIPTION	PRI





#### SPRAYERS PLUS

#### DESCRIPTION

- · Small, heavy duty pressure sprayer
- · Lockable on/off flow control for continuous spraying
- · Nozzle adjustment from fine jet to mist
- 3 Years guarantee



#### 1.25 LITRE SPRAYER

1366

PART NUMBER	CAPACITY	PRICE
HZ4122P	1.25 litres	£23.07

#### DESCRIPTION

- Specifically designed for spraying larger areas
   Contoured container, shaped to comfortably fit the operator's back
   Covers up to 480 m²
- 3 Years guarantee



#### **16 LITRE SPRAYER**

PART NUMBER	CAPACITY	PRICE
HZ4716	16 litres	£121.32

#### DESCRIPTION

- · Lockable on/off flow control for continuous spraying
- · Wide ergonomic pump handle for easy filling and emptying
- Covers up to 210 m<sup>2</sup>
- 3 Years guarantee



#### **7 LITRE SPRAYER**

PART NUMBER	CAPACITY	PRICE
HZ4507	7 litres	£51.56

#### **SPRAYERS PRO**

#### DESCRIPTION

- Small, heavy duty pressure sprayer for the application of aggressive chemicals
- · Equipped with Viton fluoroelastomer seals
- 2 Years guarantee



#### **VITON®**

#### 1.25 LITRE SPRAYER

PART NUMBER	CAPACITY	PRICE
HZ5102	1.25 litres	£25.99

#### DESCRIPTION

- · Lockable on/off flow control for continuous spraying
- · Equipped with Viton fluoroelastomer seals
- Covers up to 210 m<sup>2</sup>
- 2 Years guarantee



1366

#### **VITON®**

7 LITRE SPRAYER

ART NUMBER	CAPACITY	PRICE
HZ5107	7 litres	£65.51