

Specifications


Model	EIW2000	EIW3000	EIW4000	EIW5000
Guaranteed pressure resistance(MPa)	1.5			
Max. working pressure(MPa)	1.0			
Working temperature(°C)	5-60			
Filter precision	40µm (5 µm is optional)			
Bowl material	Polycarbonate			
Bowl guard	None	Available		
Pressure adjusting range(MPa)	0.15-0.85			
Valve type	With overflow			

Model	Specifications		Drain function	Auto drain model
	Rated flow (L/min)	Port size(G)		
EIW2000-01	1078	1/8	Manual drain	EIW2000-01D
EIW2000-02	1165	1/4		EIW2000-02D
EIW3000-02	1998	1/4	a. Zero pressure drain b. Manual drain	EIW3000-02D
EIW3000-03	2177	3/8		EIW3000-03D
EIW4000-03	5108	3/8		EIW4000-03D
EIW4000-04	5211	1/2		EIW4000-04D
EIW5000-06	6200	3/4		EIW5000-06D
EIW5000-10	6400	1		EIW5000-10D

* The above information is based on 8.0 Bar supply pressure and 6.3 Bar set pressure

* NPT,PT port size is optional

Main Dimensions (mm)

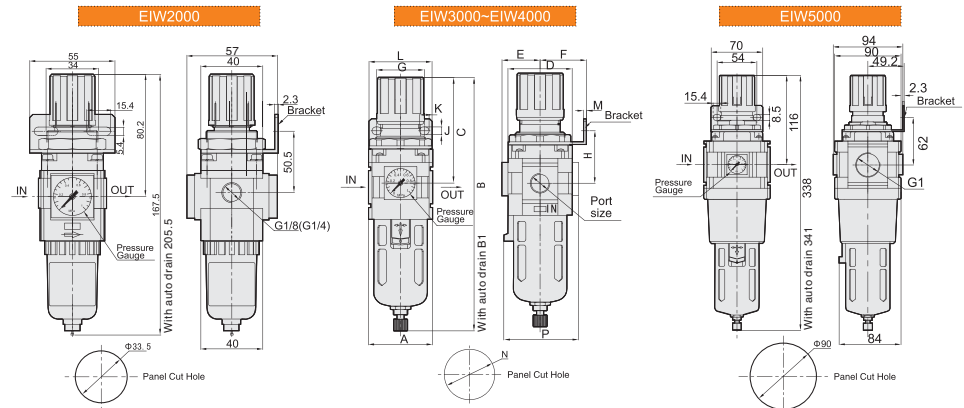

Model	Port Size (G)	A	B	B1	C	D	E	F	G	H	J	K	L	M	N	P
EIW3000	1/4"-3/8"	54	211	224.5	92.5	54	32	39	40	45	6.5	8	53	2.3	42.5	63
EIW4000	3/8"-1/2"	70	262	265	112	70	42	49.2	54	53.5	8.5	10.5	70	2.3	52.5	74