


BLOW & WATER GUNS, HOSE REELS & BALANCERS



Z 7

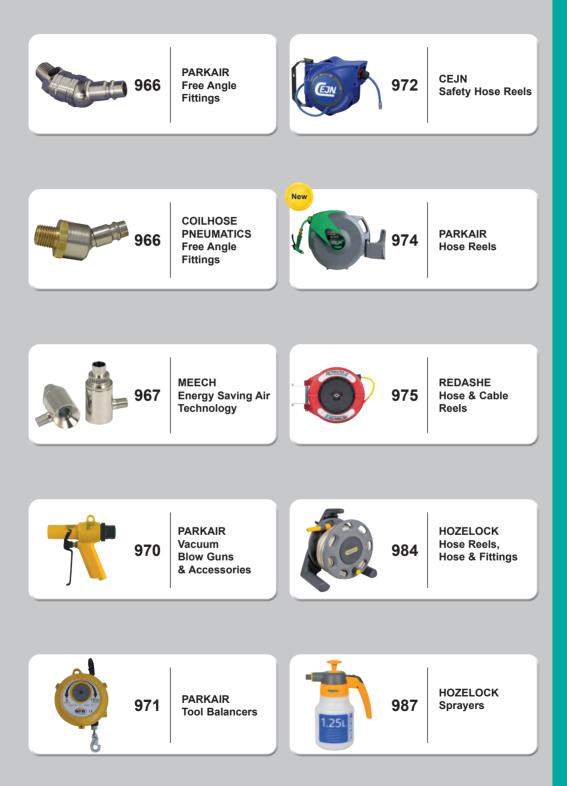

BLOW GUNS & DISPLAY CASES – SERIES 208



620

BLOW GUNS – SERIES 208

FEATURES

- · Easy connection
- · Ergonomically designed for comfortable handling
- · Suspension possible by both the built-in hook and the handle
- The normal grip is adjusted to fit the hand during normal usage · Extremely durable acetal plastic that also isolates against cold media
- . Infinitely variable airflow with high volume flow for efficient cleaning

SPECIFICATIONS

Max working pressure

Airflow at inlet pressure of	500 l/m (18 CFM)
6 bar (87 psi)	500 min (10 01 m)

Standard blow guns: 16 bar (232 psi) 8 bar (116 psi) blow gun with regulator

Temperature range -20°C to +60°C (-4°F to +140°F) APPLICABLE SAFETY STANDARDS



The products with the "OK" symbol are compliant with the OSHA directive STD1-13.1 (1910-242(b). When dead ending occurs, static pressure at the main orifice shall not exceed 30 psi (2 bar)

The products with the "EAR" symbol are compliant with the International Standard ISO 4414 - Pneumatic Fluid Power and OSHA 1910.95 - Occupational Noise Exposure. These products have a sound level below 85 db(A) and meet the EU Machine Directive §1.5.8. concerning noise reduction demands



620

RI WI

1/4

F

BLOW GUN WITHOUT NOZZLE 1/4" BSPT

PART NUMBER	DESCRIPTION	PRICE
C112080000	Blow gun, no nozzle supplied	£15.42



OK BLOW GUN WITH REGULATO 1/4" BSPT	R	620
PART NUMBER	DESCRIPTION	PRICE
C112080300	Blow gun 90 mm, automatic shut-off	£38.28



BLOW GUN WITH 90 MM TUBE 1/4" BSPT

1/4" BSPT	/	620
PART NUMBER	DESCRIPTION	PRICE
C112080100	Blow gun, non-removable nozzle	£17.33
C112080200	Blow gun, removable nozzle	£18.21

OW GUN TH STAR-TIP " BSPT		62
PART NUMBER	DESCRIPTION	PRICE
C112083100	Blow gun 90 mm, non-removable nozzle	£19.12
C112083200	Blow gun 90 mm, removable nozzle	£20.08

BLOW GUN DISPLAY CASE

FEATURES

- · Blow gun display and contents
- 208 Series
- · Easy connection
- · Suitable for air and fluids
- · Ergonomically designed for comfortable handling





EXTENSION TUBE

PART NUMBER

C112080219

C112080220

RL

620

PRICE

£16.68

£16.99



NOZZLES FOR USE WITH C112080000 / C112080200



<mark>OK</mark> 90 MM TUBE REG	GULATOR	620
PART NUMBER	DESCRIPTION	PRICE
C112080216	90 mm Tube regulator	£25.65

OK AIR CURTAIN NO		620
PART NUMBER	DESCRIPTION	PRICE
C112089954	Air curtain nozzle	£11.26

OK BYPASS NOZZLE		620
PART NUMBER	DESCRIPTION	PRICE
C112089961	Bypass nozzle	£6.87

OK SILENCER		620
PART NUMBER	DESCRIPTION	PRICE
C112089962	Silencer	£10.23
C112089965	Silencer nozzle	£2.48

2 400 MM FLEXIBL	E TUBE	620
PART NUMBER	DESCRIPTION	PRICE
C112080222	400 mm Flexible tube	£20.57

DESCRIPTION

300 mm Tube

500 mm Tube

JBBER TIP NO		620
PART NUMBER	DESCRIPTION	PRICE
C112089956	14 mm Rubber tip	£6.99
C112089957	25 mm Rubber tip	£8.78
C112089958	35 mm Rubber tip	£13.82
C112089960	3 Piece rubber tip kit	£25.27

	Colorado a	620
PART NUMBER	DESCRIPTION	PRICE
C112089963	Venturi nozzle	£8.51



C112109000 Magnet, screw, bolt and 2 x fixing plates £20.88

NOZZLES FOR USE WITH C112080000 / C112083200

2 90 MM STAR-TIP TUBE		620
PART NUMBER	DESCRIPTION	PRICE
C112083215	90 mm Star-tip tube	£8.32

2 STAR-TIP EXTEN	SION TUBE	620
PART NUMBER	DESCRIPTION	PRICE
C112083219	300 mm Star-tip tube	£23.32



MULTIFLOW AIR AND FLUID GUN



DESCRIPTION

CEJN's new MultiFLOW blow gun effectively cleans surfaces with air or water with unparallelled blowing force. Precise flow is achieved by adjustable flow settings. Nozzle adjusts from narrow jet to wide beam. The MultiFLOW meets and exceeds OSHA safety standards when dead-ended.

FEATURES / BENEFITS

Unmatched blowing force

Adjustable flow control
 Adjustable beam

SPECIFICATIONS

SPECIFICATIONS	
Air flow	200 - 1200 l/min (7 - 42 CFM)
Fluid flow	5 - 25 l/min (1.1 - 5.5 GPM UK)
Air sound level	79 – 101 dBA
Max working pressure	16 bar (232 psi)
Min burst pressure	64 bar (928 psi)
Temperature range 16 bar	-20°C to +60°C (-4°F to +140°F)
Temperature range 10 bar	-20°C to +80°C (-4°F to +176°F)
Media	Air and non-explosive water based liquids
MATERIALS	
Body	POM, TPE, aluminium
Seal	NBR (nitrile)

APPLICABLE SAFETY STANDARDS



2

OK

MULTIFLOW BLOW GUN

PART NUMBER

C112100400

The products with the "OK" symbol are compliant with the OSHA directive STD1-13.1 (1910-242(b). When dead ending occurs, static pressure at the main orifice shall not exceed 30 psi (2 bar).

The products with the "EAR" symbol are compliant with the International Standard ISO 4414 – Pneumatic Fluid Power and OSHA 1910.95 – Occupational Noise Exposure. These products have a sound level below 85 db(A) and meet the EU Machine Directive §1.5.8. concerning noise reduction demands.

CONNECTION

320 Nipple

PRICE

£61.34







7	
3	
Η.	
P.	
Ξ.	
2	
D	



MULTIFLOW AIR AND FLUID GUN & ACCESSORIES



				0	
NULTIFLOW BLOW GUN)	620	MULTIFLOW BLOW G STAR-TIP NOZZLE	•	620
PART NUMBER	CONNECTION	PRICE	PART NUMBER	CONNECTION	PRICE
C112100355	1/2" BSPP	£81.45	C112103100	320 Nipple	£67.64
NULTIFLOW BLOW GUN		620	MULTIFLOW BLOW G STRAIGHT 90 MM NO		620
PART NUMBER	CONNECTION	PRICE	PART NUMBER	CONNECTION	PRICE
C112100340	417 Nipple	£68.13	C112100152	1/4" BSPP Adaptor	£64.97
				0	
AULTIFLOW BLOW GUN) \	620	MULTIFLOW BLOW G STRAIGHT 90 MM NO		620
	CONNECTION 1/4" BSPP	620 PRICE £79.85			620 PRICE £64.13
ADJUSTABLE NOZZLE PART NUMBER C112100352		PRICE £79.85	STRAIGHT 90 MM NO. PART NUMBER C112100100	ZZLE CONNECTION 320 Nipple	PRICE £64.13
ADJUSTABLE NOZZLE	1/4" BSPP	PRICE £79.85	STRAIGHT 90 MM NO. PART NUMBER C112100100	ZZLE CONNECTION 320 Nipple	PRICE £64.13
ADJUSTABLE NOZZLE PART NUMBER C112100352		PRICE £79.85	STRAIGHT 90 MM NO. PART NUMBER C112100100	ZZLE CONNECTION 320 Nipple	PRICE

MULTIFLOW BLOW GUN ACCESSORIES

MULTIFLOW BLC ACCESSORIES STAR-TIP TUBE N		
PART NUMBER	DESCRIPTION	PRICE
C112100230	Star-Tip nozzle	£22.14

ACC	LTIFLOW BLC CESSORIES IUSTABLE FL		620
PA	ART NUMBER	DESCRIPTION	PRICE
	C112100210	Fluid nozzle	£35.77

MULTIFLOW BLOW GUN ACCESSORIES STRAIGHT TUBE NOZZLE 620 PART NUMBER C112100220 DESCRIPTION Straight tube nozzle PRICE £18.59

MULTIFLOW BLO ACCESSORIES ADJUSTABLE JE		620
PART NUMBER	DESCRIPTION	PRICE
C112100200	Jet nozzle	£15.80



TYPHOON HIGH VOLUME BLOW GUNS



DESCRIPTION

The Typhoon is Coilhose's most powerful standard blow gun, delivering up to 34 CFM (2500 series), 51 CFM (3800 series) and over three pounds of thrust at 125 psi. The Typhoon is ideal for heavy duty clean-up and blow-off, and its lightweight and sleek design make this gun a favourite.

FEATURES / BENEFITS

- Delivers up to 34 CFM at 125 psi
- · Lightweight and ergonomic
- · Variable flow trigger for control
- · Maximum flow for easy clean-up and blow-off
- · Integral hanging hook Wide variety of tins and extensions available

• While variety of tips and extensions available			
SPECIFICATIONS	2500 Series	3800 Series	
Sound level @ 125 psi	85 Db	80 Db	
Flow rate @ 125 psi	34 CFM	51 CFM	
Thrust	2.1 lbs	3.1 lbs	



OK 2500 SERIES 1/A" BSDD INI ET

1/4 DOFF INLET		2020
PART NUMBER	DESCRIPTION	PRICE
CO-TYP2502	High flow tip blow gun	£27.04
CO-TYP2506	6" Extension & high flow tip blow gun	£33.81
CO-TYP2512	12" Extension & high flow tip blow gun	£36.11
CO-TYP2518	18" Extension & high flow tip blow gun	£37.78
CO-TYP2524	24" Extension & high flow tip blow gun	£38.72
CO-TYP2536	36" Extension & high flow tip blow gun	£44.35
CO-TYP2548	48" Extension & high flow tip blow gun	£51.53
CO-TYP2560	60" Extension & high flow tip blow gun	£54.10
CO-TYP2572	72" Extension & high flow tip blow gun	£57.14



CO-

CO-

co-

CO-

coco-

OK **3800 SERIES** 3/8" BSPP INLET PART coco-

NUMBER	DESCRIPTION	PRICE
TYP3806	6" Extension & multi-jet tip blow gun	£61.09
TYP3812	12" Extension & multi-jet tip blow gun	£63.86
TYP3818	18" Extension & multi-jet tip blow gun	£65.75
TYP3824	24" Extension & multi-jet tip blow gun	£66.45
TYP3836	36" Extension & multi-jet tip blow gun	£77.42
TYP3848	48" Extension & multi-jet tip blow gun	£75.48
TYP3860	60" Extension & multi-jet tip blow gun	£79.02
TYP3872	72" Extension & multi-jet tip blow gun	£82.29
TYP3860	60" Extension & multi-jet tip blow gun	£79.02

APPLICABLE SAFETY STANDARDS



3800 SERIES

2020

2020

MULTI-JET TIP

BLOW GUN KIT

The products with the "OK" symbol are compliant with the OSHA directive STD1-13.1 (1910-242(b). When dead ending occurs, static pressure at the main orifice shall not exceed 30 psi (2 bar).

The products with the "EAR" symbol are compliant with the OSHA 1910.95 - Occupational Noise Exposure. These products have a sound level below 85 db(A).



PART NUMBER	DESCRIPTION	PRICE
CO-TYP3802	Multi-jet tip blow gun kit	£56.44



MULTI-JET TIPS

PART NUMBER

CO-EXT06MJ

CO-EXT12MJ

CO-MJN-O

1/2" - 27 UNS THREAD OTLET

TYPHOON BLOW GUN ACCESSORIES

HIGH FLOW TIPS 1/2" – 27 UNS THREAD OUTLET



12" - 27 UNS THREAD OUTLET		2020
PART NUMBER	DESCRIPTION	PRICE
CO-HFN-00M	With male pipe thread	£7.43
CO-HFN-11M	Chrome plated - with male pipe thread	£12.53
CO-HFN-00F	With female pipe thread	£5.74
CO-EXT06CN	6" Extension high flow tip	£14.50
CO-EXT12CN	12" Extension high flow tip	£16.45
CO-EXT18CN	18" Extension high flow tip	£18.39
CO-EXT24CN	24" Extension high flow tip	£19.49
CO-EXT36CN	36" Extension high flow tip	£23.04
CO-EXT48CN	48" Extension high flow tip	£27.28
CO-EXT60CN	60" Extension high flow tip	£31.02
CO-EXT72CN	72" Extension high flow tip	£34.63



2020

Image shown is CO-EXT-1



PART NUMBER	DESCRIPTION	PRICE
CO-EXT-1	1" Extension coupling	£5.28
CO-EXT-2DL	2" Extension only	£4.32
CO-EXT-6	6" Extension only	£7.87
CO-EXT-12	12" Extension only	£11.03
CO-EXT-18	18" Extension only	£12.56
CO-EXT-24	24" Extension only	£13.98
CO-EXT-36	36" Extension only	£17.46
CO-EXT-48	48" Extension only	£22.56
CO-EXT-60	60" Extension only	£26.87
CO-EXT-72	72" Extension only	£29.67

TYPHOON PLUS BLOW GUN

FEATURES / BENEFITS

- The Typhoon $^{\otimes}$ Plus delivers maximum power with precise flow control Durable and ergonomic high performance blow gun with built-in flow
- control • Non-marking material perfect for working near delicate or polished surfaces

· Tough construction suitable for use in harsh environments

SPECIFICATIONS

Max. operating pressure	10 bar (145 psi)
Max. operating temperaure	60°C (150°F)
Nozzle thread	1/2-27 UNF 2A
Air consumption	765 l/min @ 7 bar (27 CFM @ 100 psi)
Noise level	82 dBa @ 7 bar (100 psi)
MATERIALS	
Body and trigger	POM-C
Inlet adaptor	Aluminium

APPLICABLE SAFETY STANDARDS



The products with the "OK" symbol are compliant with the OSHA directive STD1-13.1 (1910-242(b). When dead ending occurs, static pressure at the main orifice shall not exceed 30 psi (2 bar). The products with the "EAR" symbol are compliant with

the OSHA 1910.95 – Occupational Noise Exposure. These products have a sound level below 85 db(A).



 CO-EXT18MJ
 18" Extension multi-jet tip

 CO-EXT24MJ
 24" Extension multi-jet tip

 CO-EXT36MJ
 36" Extension multi-jet tip

 CO-EXT48MJ
 48" Extension multi-jet tip

 CO-EXT60MJ
 60" Extension multi-jet tip

 CO-EXT60MJ
 60" Extension multi-jet tip

 CO-EXT60MJ
 72" Extension multi-jet tip

DESCRIPTION

Multi-jet tip

6" Extension multi-jet tip

12" Extension multi-jet tip

All Typhoon blow gun accessories are interchangeable with Typhoon high volume blow guns



2020

PRICE

£24.32

£36.43

£37.80

£39.19

£40.97

£45.89

£50.31

£54.10

£57.62





CANNON EXTREME HIGH VOLUME BLOW GUNS

FEATURES / BENEFITS

Suitable for anyone with an ample air supply (tow-behind compressor for mobile applications or large capacity compressor found in plants) and has a need to move heavy/stubborn debris. Also suitable for drying or cleaning several small orifices or indentations rapidly. Geared for, but not limited to, indoor use

Operation/performance: Air consumption equals 120 CFM at 100 psi.



MULTI-JET NOZZLE BLOW GUN EXTENSION MODEL

		2020
PART NUMBER	CONNECTION	PRICE
CO-9000-MJP	2" Extension model	£272.29
CO-9000-24MJP	24" Extension model	£307.29
CO-9000-48MJP	48" Extension model	£340.20

STANDARD VOLUME BLOW GUNS

BUTTON BLOW GUN FEATURES / BENEFITS

Compact design

- · Economical alternative to lever operated and pistol grip types
- · Rugged construction withstands rough handling

IN-LINE BLOW GUN FEATURES / BENEFITS

- · Compact and durable with maximum flow
- · Ideal for at-the-tool use
- · Chrome plated zinc body

MATERIAL S

Die cast aluminium, machined brass and stainless steel body 3/4" BSPP female thread port Wear-points constructed of heat-treated and zinc plated steel tip



EXTENSION MODEL

PART NUMBER	CONNECTION	PRICE
CO-9000-SP	2" Extension model	£282.39
CO-9000-24SP	24" Extension model	£254.23
CO-9000-48SP	48" Extension model	£260.11

APPLICABLE SAFETY STANDARDS



The products with the "OK" symbol are compliant with the OSHA directive STD1-13.1 (1910-242(b). When dead ending occurs, static pressure at the main orifice shall not exceed 30 psi (2 bar).



The products with the "EAR" symbol are compliant with the OSHA 1910.95 - Occupational Noise Exposure. These products have a sound level below 85 db(A).





2020

IN-LINE BLOW GUN

PART NUMBER	DESCRIPTION	PRICE
CO-641	In-line blow gun with rubber tip	£15.66











CEG 1 BLOW GUN RANGE

DESCRIPTION

The CEG-1 is ergonomically designed to fit the natural contour of the user's hand, maximising comfort even during long term use. This gives the user a wider range of motion to direct the additional CEG-1 working capacity right where it's needed, resulting in increased blow-off efficiency.

FEATURES / BENEFITS

- . The curve of the heavy duty steel lever and soft vinyl grip allows the
- thumb to rest in a natural position, allowing maximum comfort
- · Full-size hanging hook makes the gun easy to store and use
- Unique thermoplastic wrap-around body cover maximises user comfort
- OSHA compliant
- Maximum inlet 150 psi
- · Full size hanging hook makes the gun easy to store and use
- · Unique thermoplastic, wrap-around body cover maximises user comfort OSHA compliant

CONNECTION

1/4" BSPP

- Maximum inlet 150 psi
- MATERIALS

OK

OK

- · Die cast zinc body
- 1/4" BSPP female thread port
- · Aluminium with black anodised sleeve tip

HIGH FLOW SAFETY BLOW GUN COMPLETE WITH SAFETY NOZZLE

PART NUMBER

CO-CEG-1HP

AND SAFETY NOZZLE

PART NUMBER

CO-CEG-06SHP-DPB

CO-CEG-12SHP-DPB

CO-CEG-24SHP-DPB

CO-CEG-36SHP-DPB

· Nickel plated steel lever



APPLICABLE SAFETY STANDARDS

The products with the "OK" symbol are compliant with the OSHA directive STD1-13.1 (1910-242(b)). When dead ending occurs, static pressure at the main orifice shall not exceed 30 psi (2 bar).



The products with the "EAR" symbol are compliant with the OSHA 1910.95 – Occupational Noise Exposure. These products have a sound level below 85 db(A).





2020

PART NUMBER	CONNECTION	PRICE
CO-CEG-STH	1/8" – 27 NPSM	£5.13

HIGH FLOW SAFETY BLOW GUNS COMPLETE WITH EXTENSION

1/4" BSPP

1/4" BSPP

1/4" BSPP



£29.09

£31.64

£34.42

2020

PRICE

£20.42

EXTENSION ONL	Y	2020
PART NUMBER	EXTENSION SIZE	PRICE
CO-CEG-06-DPB	6" Extension	£6.85
CO-CEG-12-DPB	12" Extension	£8.97
CO-CEG-24-DPB	24" Extension	£11.44
CO-CEG-36-DPB	36" Extension	£14.23



12'

24'

36'



600 SERIES METAL BLOW GUNS

2020



2020

2020

FEATURES / BENEFITS

- · Durable zinc, die cast body
- Ergonomic design and large operating lever to reduce fatigue and discomfort

Chrome plated finish for superior corrosion resistance
 SPECIFICATIONS

Pressure rating

Temperature range

10 bar (150 psi) 0°C to 80°C (32°F to 180°F)

APPLICABLE SAFETY STANDARDS



The products with the "OK" symbol are compliant with the OSHA directive STD1-13.1 (1910-242(b). When dead ending occurs, static pressure at the main orifice shall not exceed 30 psi (2 bar).

2

The products with the "EAR" symbol are compliant with the OSHA 1910.95 – Occupational Noise Exposure. These products have a sound level below 85 db(A).



SAFETY BLOW GUN 1/4" BSPT INLET

N4 DOI I INCEI		2020
PART NUMBER	DESCRIPTION	PRICE
CO-600SDL	Standard safety gun	£12.67



PART NUMBER	DESCRIPTION	PRICE
CO-600STDL	Tamperproof gun	£15.24





OK 2 SAFETY BLOW GUN

1/4" BSPT INLET X 1/8" NPSM OUTLET

PART NUMBER	DESCRIPTION	PRICE
CO-603S	3" Safety extension gun	£23.35
CO-606S	6" Safety extension gun	£24.83
CO-608S	8" Safety extension gun	£25.89
CO-610S	10" Safety extension gun	£28.12
CO-612S	12" Safety extension gun	£30.06
CO-616S	16" Safety extension gun	£34.24
CO-618S	18" Safety extension gun	£36.34
CO-624S	24" Safety extension gun	£45.27
CO-630S	30" Safety extension gun	£53.43
CO-636S	36" Safety extension gun	£57.59



SAFETY BLOW GUN

1/4" BSPT INLET X 1/8" NPSM OUTLET

PART NUMBER	DESCRIPTION	PRICE
CO-600FF06	6" Flexible safety extension gun	£31.37
CO-600FF12	12" Flexible safety extension gun	£32.18





£44.10

SAFETY TIPS FOR USE WITH CO-600NT1W

OK SAFETY STANDARD 1/8" NPSM		RD
	PART NUMBER	DESCRIPTION
	CO-ST10	Safety standard tin



2020

PRICE

£10.75

£4.05

OK 7 SAFETY BOOSTE 1/8" NPSM		2020
PART NUMBER	DESCRIPTION	PRICE
CO-ST11	Safety booster tip	£7.43

DESCRIPTION

Safety shield

OK 7 STRAIGHT SAFETY EXTENSION 1/8" NPSM 2020				
PART NUMBER	DESCRIPTION	PRICE		
CO-ST203	3" Straight safety extension	£8.85		
CO-ST206	6" Straight safety extension	£11.05		
CO-ST208	8" Straight safety extension	£11.83		
CO-ST210	10" Straight safety extension	£13.41		
CO-ST212	12" Straight safety extension	£15.43		
CO-ST216	16" Straight safety extension	£19.72		
CO-ST218	18" Straight safety extension	£21.58		
CO-ST224	24" Straight safety extension	£28.89		

36" Straight safety extension



1/8" NPSM			
PART NUMBER	DESCRIPTION		

CO-ST236

PART NUMBER	DESCRIPTION	PRICE
CO-STFF06	6" Flexible safety extension	£17.85
CO-STFF12	12" Flexible safety extension	£19.20

NEEDLE TIPS

OK

SAFETY SHIELD

PART NUMBER

CO-ST12

1/8" NPSM

1/8" NPSM	
PART NUMBER SIZE PRI	CE
CO-SNT1 0.042 x 1.5/16" £5.	95
CO-SNT2 0.050 x 1.3/16" £5.	95
CO-SNT3 0.072 x 1.3/4" £5.	95
CO-SNT4 0.095 x 2.15/32" £5.	95
CO-SNT5 0.134 x 2.3/4" £5.	95





600 SERIES METAL BLOW GUNS

2020



2020

FEATURES / BENEFITS

- Durable zinc, die cast body
- Ergonomic design and large operating lever to reduce fatigue and discomfort
- · Chrome plated finish for superior corrosion resistance



STANDARD BLOW GUN

1/4" BSPT INLET X 1/8" NPSM OUTLET			2020
	PART NUMBER	DESCRIPTION	PRICE
	CO-600NT1W	Basic gun	£11.72

Meets OSHA requirements when used with safety tips



STANDARD BLOW GUN

1/4 DOFTINLET X 1/6 NFOM OUTLET		2020
PART NUMBER	DESCRIPTION	PRICE
CO-601	Rubber tip gun	£15.21

SPECIFICATIONS

Pressure rating Temperature range 10 bar (150 psi) 0°C to 80°C (32°F to 180°F)



STANDARD BLOW GUN

1/4" BSPT INLET	2020	
PART NUMBER	DESCRIPTION	PRICE
CO-602	Siphon tip gun	£28.05



STANDARD BLOW GUN 1/4" BSPT INLET X 1/8" NPSM OUTLET

PART NUMBER	DESCRIPTION	PRICE
CO-801	Steel brush gun	£31.92
CO-802	Nylon brush gun	£31.31
CO-803	Horsehair brush gun	£31.31

REPLACEMENT TIPS

RUBBER TIP		
1/8" NPSM		2020
PART NUMBER	DESCRIPTION	PRICE
CO-SAT13	Rubber tip	£6.02

SIPHON TIP 1/8" NPSM		2020
PART NUMBER	DESCRIPTION	PRICE
CO-SAT14	Siphon tip	£14.60

BRASS TIP 1/8" NPSM		2020
PART NUMBER	DESCRIPTION	PRICE
CO-SAT15	Brass tip	£2.41



BRUSH TIP 1/8" NPSM		2020
PART NUMBER	DESCRIPTION	PRICE
CO-811	Steel brush	£21.39
CO-822	Nylon brush	£18.19

TIP 1/8" NPSM		2020
PART NUMBER CO-STT32	DESCRIPTION	PRICE £39.72
0-51132	Telescoping (8" – 36")	239.72



WATER GUNS, BLOW GUNS & ACCESSORIES

PARKAIR[®]


WATER GUNS AND BLOW GUNS

FEATURES / BENEFITS FEATURES / BENEFITS · Heavy duty, rubber cover · All metal, water hose gun · Instantly adjustable spray pattern · Sturdy construction · Watertight - can be used inside or outside · Release of handle provides instant shut-off · Caustic and fat resistant SPECIFICATIONS SPECIFICATIONS Water pressure rating Up to 25 bar (363 psi) Up to 24 bar (350 psi) Water pressure rating Flow rate Temperature rating Up to 80°C (up to 175°F) Temperature rating Up to 50°C (up to 122°F) LOW PRESSURE WATER GUN **RI-JAC** SELF CLOSING WATER 4050 PART NUMBER ----

RINUMBER	DESCRIPTION	PRICE	PARTI
RWG2	1/2" BSPP	£82.68	RJ

IN	2700
INLET CONNECTION	PRICE
1/2" - 3/4" step-down hosetail adaptor	£46.06

65 l/min



Temperature range	0°C to 0°C (+32°F to +°F)
Working pressure	Up to 10 bar (145 psi)

SPECIFICATIONS







FREE ANGLE FITTINGS

PARKAIR[®]

FEATURES


- · Greatly reduces the incidence of repetitive strain injuries, such as carpal tunnel syndrome and back stress
- · Lightweight and streamlined design
- . Two rotation points prevent kinking of the supply hose
- · Steel construction for maximum service life
- · Rotating joint is supplied with dust cover

• Full 7 mm flow APPLICATIONS

- · Assembly operations in the automotive and electronic industries and spray painting
- · Mechanical joints for robotics

SPECIFICATIONS

Medium	Compressed air
Working temperature	-5°C to +60°C (+23°F to +140°F)
Max. working pressure	1Mpa (10.2 kgf/cm ²) • 145 psi
Materials	Nickel plated steel, NBR seal



NICKEL PLATED STEEL CENTRE COVER

FEMALE THREAD X MALE THREAD		3450
PART NUMBER	DESCRIPTION	PRICE
CHNFAG2F-2M	1/4" BSPT female x 1/4" BSPT male	£26.85

FREE ELBOW FIT FEMALE X FEMA	 F	
PART NUMBER		

PART NUMBER	THREAD	PRICE
CH2HJ2F-2F	1/4" BSPT	£36.90
CH3HJ3F-3F	3/8" BSPT	£45.84
CH4HJ4F-4F	1/2" BSPT	£48.48



EURO STANDARD NIPPLE

X FEMALE THREAD

PART NUMBER

CO-11-04BSF

X MALE IHREAD		3450
PART NUMBER	DESCRIPTION	PRICE
CHNFAP2M320	320 Nipple x 1/4" BSPT male	£26.85

FREE ELBOW FITTING MALE X FEMALE



PART NUMBER	THREAD	PRICE
CH2HJ2M-2F	1/4" BSPT Male x 1/4" BSPT Female	£72.11
CH3HJ3M-3F	3/8" BSPT Male x 3/8" BSPT Female	£45.84
CH4HJ4M-4F	1/2" BSPT Male x 1/2" BSPT Female	£48.48



FREE ANGLE FITTINGS



3450

3450

NICKEL PLATED STEEL CENTRE COVER



EURO STANDARI X MALE THREAD			3450
PART NUMBER	DESCR	IPTION	PRICE
CO-11-04BS	000 Niles also	x 1/4" BSPT	£39.89



ENERGY SAVING AIR TECHNOLOGY



AIR CURTAIN

FEATURES AND BENEFITS

- 25:1 air amplification
- · Up to 30 dBA noise reduction
- · Health and safety compliant
- Low maintenance no moving parts
- · Ease of mounting flange running the entire length

APPLICATIONS

- Product drying
- Product coolingSwarf contamination removal
- Air saving reduction of energy bills
- Compressor demand reduction
- Noise reduction

AIR CURTAIN ALUMINIUM			5700
PART NUMBER	LENGTH	THREAD SIZE	PRICE
AIRM-A85003	80 mm	1 x 1/4" BSPP	£169.40
AIRM-A85004	100 mm	1 x 1/4" BSPP	£231.00
AIRM-A85006	150 mm	1 x 1/4" BSPP	£235.40
AIRM-A85012	300 mm	1 x 1/4" BSPP	£301.40
AIRM-A85018	450 mm	1 x 1/4" BSPP	£367.40
AIRM-A85024	600 mm	2 x 1/4" BSPP	£437.80
AIRM-A85030	750 mm	2 x 1/4" BSPP	£534.60
AIRM-A85031	800 mm	2 x 1/4" BSPP	£596.20
AIRM-A85036	900 mm	2 x 1/4" BSPP	£646.80
AIRM-A85048	1200 mm	4 x 1/4" BSPP	£902.00
AIRM-A85055	1400 mm	4 x 1/4" BSPP	£1031.80
AIRM-A85071	1800 mm	6 x 1/4" BSPP	£1500.40

@ @ @

AIR AMPLIFIER

	Outlat	Inlet Air				Ai	r Cons	umptio	on				Sound Level*				
Product Code	Outlet Diameter	Pressure			cfm					l/min					dBA		
Floduct Code	(mm)	psi	20	40	60	80	100	20	40	60	80	100	20	40	60	80	100
(1111)	Bar	1.4	2.7	4.1	5.4	6.8	1.4	2.7	4.1	5.4	6.8	1.4	2.7	4.1	5.4	6.8	
AIRM-A15005	18		4	8	10	13	15	113	227	283	368	425	70	75	82	83	86
AIRM-A15008 & AIRM-A100008	32		8	11	13	15	17	227	311	368	425	481	59	73	76	79	83
AIRM-A15006	37		9	14	19	23	27	255	396	538	651	765	66	77	82	83	86
AIRM-A15015 & AIRM-A10015	51		13	18	22	25	28	368	510	623	708	793	59	69	75	78	83
AIRM-A15030 & AIRM-A10030	100		15	21	26	30	34	425	595	736	850	963	59	68	73	75	78

AIR AMPLIFIER

ALUMINIUM

FEATURES AND BENEFITS

- 4 to 25:1 air amplification can cut compressed air demand by 70%
- · Up to 30 dBA noise reduction
- · Health and safety compliant
- · Low maintenance no moving parts
- · Application specific set-up (no shims) fully adjustable

APPLICATIONS

- Product redirection
- Product drying
- Air saving reduction of energy bills
- Compressor demand reduction
- Noise reduction
- Product coolingBlowing and vacuum applications

OUTLET DIA THREAD SIZE

FARTNONDER	OUTLET DIA	THREAD SIZE	FRICE
AIRM-A15005	18 mm	M5 x 6 mm	£158.40
AIRM-A15006	37 mm	G1 x 6 mm	£193.60
AIRM-A15008	32 mm	1/4" BSPP	£160.60
AIRM-A15015	51 mm	3/8" BSPP	£209.00
AIRM-A15030	100 mm	1/2" BSPP	£585.20
STAINLESS STEE	EL		
AIRM-A10008	32 mm	1/4" BSPP	£424.60
AIRM-A10015	51 mm	3/8" BSPP	£479.60
AIRM-A10030	100 mm	1/2" BSPP	POA

HIGH THRUST JET

FEATURES AND BENEFITS

- 4 to 6:1 air amplification
- Up to 30 dBA noise reduction
- · Health and Safety compliant
- · Low maintenance no moving parts
- Application specific set-up
- Cuts compressed air usage

APPLICATIONS

- · Air saving reduction of energy bills
- · Compressor demand reduction
- Noise reduction
- · Swarf removal
- · Material conveying
- Product drying
- Product cooling



* In-line high thrust jet.

5700

DDICE



ENERGY SAVING AIR TECHNOLOGY



SAFETY BLOW GUN

DESCRIPTION

Meech energy saving nozzles and blow guns direct compressed air over a curved surface on the outside of the nozzle. This action entrains the ambient air and amplifies the total air flow. Meech nozzles and blow guns can save up to 70% of compressed air demand, whilst significantly reducing noise levels. They have hundreds of applications and will significantly reduce running costs.

FEATURES AND BENE	FITS	APPLICA	TIONS			
 25:1 air amplification Up to 30 dBA noise reduction Health and safety compliant Low maintenance – no moving parts Application specific set-up Operator comfort – ergonomic lightweight aluminium handle 		 Air saving - reduction of energy bills Compressor demand reduction Swarf removal Any blow gun task 				
SPECIFICATIONS						
Inlet air pressure	Air consu	mption	Sound level			
20 psi (1.4 bar) 5 cfm (14		12 lpm)	65 dBA			
40 psi (2.7 bar)	9 cfm (25	55 lpm)	71 dBA			
60 psi (4.1 bar)	12 cfm (34	40 lpm)	76 dBA			
80 psi (5.4 bar)	15 cfm (42	25 lpm)	79 dBA			



STAINLESS STEE	5700				
PART NUMBER	THREAD SIZE	PRICE			
AIRM-A45400-SS	1/4" BSPP	£66.00			
ALUMINIUM NOZZLE					

1/4" BSPP

APPLICATIONS

Noise reduction

· Parts ejection

AIRM-A45400

100 psi (6.8 bar)

· Air saving - reduction of energy bills

Compressor demand reduction

£28.60

81 dBA

ENERGY SAVING SAFETY NOZZLE

FEATURES AND BENEFITS

- 25:1 air amplification
- Up to 30dBA noise reduction
- Health and safety compliant
- · Low maintenance no moving
- parts
 - Swarf removal
 Cooling of parts

Application specific set-upFits two thread types

SPECIFICATIONS

LON IOANO		
Inlet air pressure	Air consumption	Sound level
20 psi (1.4 bar)	5 cfm (142 lpm)	65 dBA
40 psi (2.7 bar)	9 cfm (255 lpm)	71 dBA
60 psi (4.1 bar)	12 cfm (340 lpm)	76 dBA
80 psi (5.4 bar)	15 cfm (425 lpm)	79 dBA
100 psi (6.8 bar)	18 cfm (510 lpm)	81 dBA
,		



ADJUSTABLE PACK OF 5

STAINLESS STEE	L	5700
PART NUMBER	THREAD SIZE	PRICE
AIRM-A40009-1/8	1/8" BSP Male	£233.20
AIRM-A40009-1/4	1/4" BSP Male	£233.20
ALUMINIUM		
AIRM-A48009-1/8	1/8" BSP Male	£105.60
AIRM-A48009-1/4	1/4" BSP Male	£105.60

COLDSTREAM AIR GUN

DESCRIPTION

Coldstream air guns, from Meech, use compressed air to provide a cold air source commonly used for spot cooling. Available in adjustable and non-adjustable versions with a choice of knuckle trunking. The Coldstream air gun is capable of achieving temperatures that are over 40°C below the compressed air temperature.

FEATURES AND BENEFITS

- Available in two sizes
- Up to 30 dBA noise reduction
 Health and safety compliant
- Low maintenance no moving parts
- Application specific set-up supplied with 4 generators
- Easy to install secure in place with a strong magnet

APPLICATIONS

- Ultrasonic weld cooling
- Spot cooling
- Component cooling
- Tool cooling



ADJUSTABLE			5700
PART NUMBER	SIZE	OUTLET	PRICE
AIRM-A60015A	280 mm x 54 mm	Single	£453.20
AIRM-A60015AY	280 mm x 54 mm	Double	£459.80
NON-ADJUSTABI			
AIRM-A60015	280 mm x 54 mm	Single	£424.60
AIRM-A60015Y	280 mm x 54 mm	Double	£440.00
AIRM-A60008	229 mm x 45 mm	Single	£448.80

NEEDLE COOLER

DESCRIPTION

Needle Coolers, from Meech, use compressed air to provide a cold air source. Combining a small vortex tube, hot-end silencer and flexible knuckle trunking that direct the cold air flow to the target. Typically used to cool sewing needles, a magnetic mounting bracket means the cooler can be fixed to virtually any metal surface. The Needle Cooler is capable of providing a cold air source up to 50°C below the compressed air temperature.

FEATURES AND BENEFITS

- · Stainless steel construction hard wearing
- Low maintenance no moving parts
- · Suitable for harsh environments
- · Easy direction of cold airflow
- · Quick and easy mounting magnetic base



NEEDEE 000EE			5700
PART NUMBER	SIZE	OUTLET	PRICE
AIRM-A20503	148 mm x 45 mm	Single	£319.00
AIRM-A20504	148 mm x 45 mm	Double	£336.60

Nineteen



ENERGY SAVING AIR TECHNOLOGY



5700

CABINET COOLER

DESCRIPTION

Meech Air Technology Stainless Steel Cabinet Cooler Systems provide a cold air source to stop cabinets overheating and prevent ingress of contamination, such as dust or moisture. When compared to fans that are commonly found in cabinets, Meech Cabinet Cooling Systems provide the ideal cooling solution.

FEATURES AND BENEFITS

- · Alternative to traditional AC units
- · Up to 30 dBA noise reduction
- Health and safety compliant
- Low maintenance no moving parts
- Application specific set-up
- · Easy to install
- · Prevents dust entering the cabinet

APPLICATIONS

- Industrial PC cooling
- CCTV cooling
- · Cooling equipment on marine vessels
- Machine panel cooling
- Cooling LCD touch screens





EX CABINET COOLER UNIT

PART NUMBER	INCLUDES	PRICE
AIRM-A70025EX	4 Generators and 2.5 m of cooling tube	£662.20
CABINET COOLE	RSYSTEM	
AIRM-A70325-24	24 V Solenoid and thermostat	£745.80
AIRM-A70325-240	240 V Solenoid and thermostat	£745.80
AIRM-A70325-110	110 V Solenoid and thermostat	£745.80

VORTEX TUBE

DESCRIPTION

Meech Air Technology Stainless Steel Vortex Tubes convert compressed air into two airflows, one extremely cold and the other extremely hot. Vortex tubes have no moving parts and can produce a drop in temperature up to 50°C below the compressed air temperature, whilst hot air can be up to 50°C above compressed air temperature.

FEATURES AND BENEFITS

- · Cold air to 50°C below compressed air temperature
- · Hot air to 50°C above compressed air temperature
- · Hard wearing manufactured from stainless steel
- Maintenance free no moving parts
- Accurate temperature control

APPLICATIONS

- · Spot cooling
- · Weld cooling
- · Plastic slitting
- Product cooling
- · Foodstuffs cooling



SMALL			5700
PART NUMBER	AIR CONSUMPTION	DESCRIPTION	PRICE
AIRM-A20008	8 cfm	Refrig H	£266.20
AIRM-A21008	8 cfm	Cold L	£266.20
MEDIUM			
AIRM-A20010	10 cfm	Refrig H	£319.00
AIRM-A21010	10 cfm	Cold L	£319.00
AIRM-A20015	15 cfm	Refrig H	£319.00
AIRM-A21015	15 cfm	Cold L	£319.00
AIRM-A20025	25 cfm	Refrig H	£319.00
AIRM-A21025	25 cfm	Cold L	£319.00
AIRM-A20035	35 cfm	Refrig H	£319.00
AIRM-A21035	35 cfm	Cold L	£319.00

EXPERIMENTAL KITS

DESCRIPTION

The Meech Experimental Kit incorporates a Meech Vortex Tube with a Cold End Silencer and a length of flexible knuckle trunking, which can be used to direct the air flow. The Experimental Kit also includes all 8 generators, that allows for the most flexible temperature and air consumption, perfect for applications that require changing cold air temperature.

FEATURES AND BENEFITS

- · Low maintenance no moving parts
- · Suitable for a range of applications
- No electricity costs
- · Available in 2 sizes
- Runs only on compressed air
- · Stainless steel construction hard wearing
- · Provided with full range of generators (temperature control)



EXPERIMENTAL KITS HIGH AND LOW COLD FRACTION

PART NUMBER	AIR CONSUMPTION	SIZE	LENGTH	PRICE
AIRM-A20300	8 – 10 cfm	Small	239 mm	£365.20
AIRM-A20400	10 – 35 cfm	Medium	272 mm	£382.80

Nineteen

5700



VACUUM BLOW GUNS

PARKAIR[®]

FEATURES / BENEFITS

- Made from nylon 6 abrasive resistant material
- Low air consumption
- Hand held or static site
- Blow or vacuum

Use filtered air @ 60 - 115 psi / 10 mm bore air-line

SPECIFICATIONS	LVM 22	LVM AP 22
CFM @ 60 psi	9 in / 54 out	9 in / 54 out
CFM @ 100 psi	14.5 in / 101.5 out	14.5 in / 101.5 out
Air inlet size	1/4" BSPT male	1/4" compression fitting
Conveying hose ID bore	32 mm	32 mm
CAFETY		

SAFETY

We recommend that dry filtered compressed air and appropriate safety equipment is used with this product.

For optimum performance, the air feed line should be at least 3/8" ID bore.



ACCESSORIES

	DUST BAG		2700
	PART NUMBER	DESCRIPTION	PRICE
	LVM22-1	Complete with clip	£53.37
2700			
PRICE			
£71.42			
	EXTENSION TUB	E	2700
	PART NUMBER	DESCRIPTION	PRICE
1	LVM22-3	Extension tube	£12.34
2700 PRICE £56.84	CREVICE NOZZL	E	2700
	PART NUMBER	DESCRIPTION	PRICE
	LVM22-5	Crevice nozzle	£7.02
	ROUND BRUSH		2700
	PART NUMBER	DESCRIPTION	PRICE
2700	LVM22-6	60 mm diameter	£6.86
PRICE £65.79			
p £65.79 Personal uipment	CONVEYING HOS	SE O	2700
	PART NUMBER	DESCRIPTION	PRICE
	LVM22-4	1 metre length	£10.12

VACUUM BLOW GUNS







TOOL BALANCERS

PARKAIR[®]

FLEX TYPE A FEATURES

- · High impact resistant composite housing
- 7 models selected for a load range from 0 to 3.5 kg
- · Adjustable spring load throughout and ergonomic handgrip knob
- · Adjustable rope stroke

SF05-1

SF1-2

SE2-35

- · Available with nylon braided rope or steel braided, nylon coated wire
- · Tools in conformity with CE directives

FLEX TYPE B FEATURES

- Metal housing
- 14 models selected for a load range from 0.5 to 11 kg
- · Adjustable spring load throughout and safety removable handle
- · Adjustable rope stroke
- · Available with nylon braided rope or steel braided, nylon coated wire
- · Tools in conformity with CE directives

FLEX TYPE A NYLON BRAIDED) ROPE			4610
PART NUMBER	LOADING CAPACITY	WEIGHT	CORD LENGTH	PRICE
SF0-05	0 – 0.5 kg	0.3 kg	2.3 m	£66.61

0.35 kg

0.4 kg

0.4 kg

2.3 m

2.3 m

2.3 m

£66.61

£66.61

£66.61

FLEX
0

n

CORD

LENGTH

4610

PRICE

FLEX TYPE B NYLON ROPE

P/

ART NUMBER	LOADING CAPACITY	WEIGHT	

	OALAGITT		LENGIN	
FLEX05-1	0.5 – 1 kg	0.6 kg	2.3 m	£68.39
FLEX05-15	0.5 – 1.5 kg	0.6 kg	2.3 m	£68.39
FLEX1-2	1 – 2 kg	0.65 kg	2.3 m	£68.39
FLEX2-35	2 – 3.5 kg	0.65 kg	2.3 m	£68.39

STEEL BRAIDED NYLON COATED WIRE

FLEX05-1A	0.5 – 1 kg	0.6 kg	2.3 m	£72.66
FLEX05-15A	0.5 - 1.5 kg	0.6 kg	2.3 m	£72.66
FLEX1-2A	1 - 2 kg	0.65 kg	2.3 m	£72.66
FLEX2-35A	2 - 3.5 kg	0.65 kg	2.3 m	£72.66
FLEX3-6A	3 - 6 kg	1.64 kg	2.3 m	£110.78
FLEX5-85A	5 - 8.5 kg	1.7 kg	2.3 m	£110.78
FLEX8-11A	8 - 11 kg	1.75 kg	2.3 m	£110.78

FLEX TYPE C FEATURES

- · Metal housing
- 10 models selected for a load range from 1 to 70 kg

0.5 – 1 kg

2 – 3.5 kg

1 – 2 kg

- · Adjustable spring load
- Adjustable rope stroke
- Steel rope
- Safety device against spring break off • Tools in conformity with CE directives



6.5 x 10 mm soft braided polyurethane hose

· Adjustable hose stroke

MATIC FEATURES

· Composite housing

Adjustable spring load

· Tools in conformity with CE directives

• 3 models selected for a load range from 0.5 to 5 kg



MATIC	

4610

MATIC				4610
PART NUMBER	LOADING CAPACITY	WEIGHT	CORD LENGTH	PRICE
MATIC15	0.5 – 1.5 kg	1.6 kg	1.6 m	£203.03
MATIC30	1.5 – 3.0 kg	1.7 kg	1.6 m	£203.03
MATIC50	3.0 – 5.0 kg	1.8 kg	1.6 m	£203.03
Matic hose diameter internal 6.5 mm / external 10 mm				

Maximum working pressure 10 bar

FLEX TYPE C

PART NUMBER	LOADING CAPACITY	WEIGHT	CORD LENGTH	PRICE
FLEX-3	1 – 3 kg	1.4 kg	1.5 m	£117.55
FLEX-5	3 – 5 kg	1.5 kg	1.5 m	£117.55
FLEX-9	5 – 9 kg	3.4 kg	1.5 m	£313.45
FLEX-15	9 – 15 kg	3.8 kg	1.5 m	£313.45
FLEX-22	15 – 22 kg	7.2 kg	1.5 m	£463.05
FLEX-30	22 – 30 kg	8.5 kg	1.5 m	£463.05
FLEX-40	30 – 40 kg	9.8 kg	1.5 m	£623.34
FLEX-50	40 – 50 kg	10.4 kg	1.5 m	£623.34
FLEX-60	50 – 60 kg	11.6 kg	1.5 m	£651.84
FLEX-70	60 – 70 kg	11.8 kg	1.5 m	£666.09



EJN



HIGH QUALITY

CEJN's high quality hose and cable reels contain a CEJN polyurethane hose or rubber cable. The reels are easy to manoeuvre and can be ceiling or wall-mounted and offer full, 300 degree movement. A robust exterior housing protects the hose or cable and reel mechanism, and the feeding action works flawless and tangle free. A stop function can be activated if full continuous feeding is not necessary at the time.

FEATURES AND BENEFITS

- · High flow and low pressure drop
- · Strong, slow retraction
- Quicker hose change
- Hose guide
- Soft stop-ball prevents tripping
- · Lowest pressure drop on the market

SPECIFICATIONS

PART NUMBER	MAX. WORKING PRESSURE	TEMPERATURE RANGE	MEDIA
C199112082	16 bar	-20°C to +60°C	Air
C199112182	16 bar	-20°C to +60°C	Air
C199112020	16 bar	-20°C to +60°C	Air
C199112022	16 bar	-20°C to +60°C	Air
C199112120	16 bar	-20°C to +60°C	Air
C199112130	16 bar	-20°C to +60°C	Air
C199112132	16 bar	-20°C to +60°C	Air
C199112140	12 bar	-20°C to +60°C	Air
C199112040	12 bar	-20°C to +60°C	Air
C199112150	10 bar	-20°C to +60°C	Air
C199112088	16 bar	-20°C to +60°C	Air
C199112168	16 bar	-20°C to +60°C	Air
C199112028	16 bar	-20°C to +60°C	Air
C199112128	16 bar	-20°C to +60°C	Air
C199112138	16 bar	-20°C to +60°C	Air
C199112230	9 bar	5°C to +60°C	Water
C199112240	9 bar	5°C to +60°C	Water

PART NUMBER	POWER (FULLY UNWOUND	DUTPUT FULLY WOUND	TEMPERATURE RANGE	MEDIA
C199112310	2400 W	1600 W	-10°C to +50°C	Electric
C199112311	2400 W	1600 W	-10°C to +50°C	Electric

STANDARDS

CE Marked in compliance with 2006/42/EC





972



SAFETY HOSE REELS



610

COMPRESSED AIR HOSE REELS



COMPRESSED AIR HOSE REE 320 ESAFE CONNECTION

320 ESAFE CONNECTION 610		
ID X OD	LENGTH	PRICE
8 x 12 mm	10 m	£316.43
8 x 12 mm	17 m	£376.28
	ID X OD 8 x 12 mm	ID X OD LENGTH 8 x 12 mm 10 m

1/4" BSPT STANDARD MALE CONNECTION

C199112020	8.0 x 12.0 mm	7 m	£285.97
C199112022	8.0 x 12.0 mm	10 m	£312.35
C199112120	8.0 x 12.0 mm	17 m	£372.20

3/8" BSPT STANDARD MALE CONNECTION

C199112130	9.5 x 13.5 mm	14 m	£378.91

3/8" BSPT STANDARD ANTI-SPARK CONNECTION

C199112132	9.5 x 13.5 mm	14 m	£402.27

1/2" BSPT STANDARD MALE CONNECTION

C199112040	11 x 16 mm	5 m	£330.86
C199112140	11 x 16 mm	10 m	£414.11
C199112150	13 x 18 mm	8 m	£423.69

HOSE REELS WITH HI-VIS HOSE



HOSE REEL WITH HI-VIS HOSE 320 ESAFE CONNECTION

020 20/11 2 0011	Eenen		010
PART NUMBER	ID X OD	LENGTH	PRICE
C199112088	8.0 x 12.0 mm	10 m	£328.53
C199112168	9.5 x 13.5 mm	14 m	£402.31


1/4" BSPT STANDARD MALE CONNECTION

C199112028	8.0 x 12 mm	10 m	£324.48
C199112128	8.0 x 12 mm	17 m	£390.37

3/8" BSPT STANDARD MALE CONNECTION

C199112138	9.5 x 13.5 mm	14 m	£398.27

ELECTRIC HOSE REELS





PART NUMBER C199112310 CABLE 3 x 1.5 mm LENGTH 17 m PRICE £479.57 CH PLUG 3 x 1.5 mm 17 m £479.57	ELECTRIC HOSE SCHUKO PLUG	REEL		610
CH PLUG	PART NUMBER	CABLE	LENGTH	PRICE
	C199112310	3 x 1.5 mm	17 m	£479.57
C199112311 3 x 1.5 mm 17 m £479.57	CH PLUG			
	C199112311	3 x 1.5 mm	17 m	£479.57



PRO-SERIES EXTREME AIR / WATER HOSE

FEATURES / BENEFITS

- Auto lock / auto rewind
- Hose layering system
- Solid brass internal spindle
- High impact touch and durable polypropylene construction with a UV stabilised case
- 180° swivel wall mount bracket
- Leader hose 2 m with brass fittings
 Adjustable hose stop

SPECIFICATIONS	15 Series	20 Series
Air / water hose	15 m x 11 mm ID	20 m x 9.2 mm ID
Hose material	Extreme ultraflex reinfo	prced pvc (blue)
Reel / case type	Polypropylene	
Weight	10 kg	
Max working pressure	300 psi (20 bar)	
Max working temperature	40°C / 140°F	

SERIES 20 WATER HOSE

FEATURES / BENEFITS

- Auto lock/ auto rewind
- Stop anywhere function
 Controlled hose return
- Adjustable tension control
- Adjustable hose stop
- Hose layering system
- · Internal brass fittings
- Replaceable hose
- · High impact weather resistant UV stabilised polypropylene case
- Leader hose 2 m with brass fittings
- Heavy duty mounting bracket with the 180°
 Includes trigger gun (water hose only)
- Photos angel gun (watch hose on

SPECIFICATIONS	
Water hose	20 m x 11.5 mm
Hose material	Heavy duty water hose
Reel / case type	Polypropylene
Weight	11.8 kg
Max working pressure	150 psi (10 bar)
Max working temperature	60°C / 140°F



New WATER HOSE	REEL	Y			4040
PART NUMBER	HOSE ID	HOSE OD	INLET	OUTLET	PRICE
			0/47 000	0/48 000	

FART NOWBER	ID	OD		OUILLI	FRICE
HR-5810450S	11.5 mm	16.5 mm	3/4" BSP male brass swivel	3/4" BSP tap quick connect	£187.50

20 SERIES

HR-5840560S

mm

mm

mm mm brass swivel brass swivel

female

male

brass swivel brass swivel

£187.50





974

Nineteen





RETRACTA R3 SERIES

REDASHE WARRANTY DETAILS

All products supplied by Redashe are warranted from one to 10 years, depending on manufacturer. Hose supplied by Redashe carries the warranty as listed by the manufacturer. A flexible connection must be used between the hose reel and supply. Use of a solid connection will void the swivel warranty. Redashe meets the requirements of BS EN ISO 9001:2008. Certification of the system was obtained by BSI Quality Assurance on 9th December 1991, number 4601QM8001.

All warranties cover reel only and exclude any hose supplied

REINFORCED PVC HOSE

FEATURES / BENEFITS

- · Tough, corrosion free polypropylene construction
- Supplied with fitted hose for specified application
- Choice of lockable mounting brackets
- Virtually maintenance free
- Lightweight average just 10 kg, easy to install
- Full automatic hose rewind for neat and tidy storage
- Low effort, easy-to-use rewind tension



PART NUMBER	HOSE ID	LENGTH	INLET SIZE	HOSE OUTLET	PRICE	
hAR320R	3/8"	20 m	3/8" BSPF	1/4" BSPM	£443.60	
hAR415R	1/2"	15 m	3/8" BSPF	3/8" BSPM	£469.32	

FOR BREATHING AIR

hBH100R3	3/8"	15 m	3/8" BSPF	3/8" BSPM	£743.85



PART NUMBER	ID ID	ENGTH	INLET SIZE	HOSE OUTLET	PRICE
hCW415B	1/2"	15 m	3/8" BSPF	1/2" BSPM	£532.00

PVC HOSE



PART NUMBER	HOSE I	LENGTH	INLET SIZE	HOSE OUTLET	PRICE	
hDR418G	1/2"	18 m	3/8" BSPF	1/2" BSPM	£435.30	

Supplied with spray gun

REINFORCED RUBBER HOSE

RED REEL COMPLETE WITH FOR HOT WASH		۱ ۳		RETRACTA			
	10 bar Working Pressure						
PART NUMBER	HOSE ID	LENGTH	INLET SIZE		PRICE		
hHW415R	1/2"	12 m	3/8" BSPF	3/8" BSPM	£602.71		
FOR PROPANE							
21 bar Working Pressure							
hHW100R3	3/8"	15 m	3/8" BSPF	3/8" BSPM	£594.69		
FOR FOOD QUALITY WATER 95°C							
	21	bar Work	ing Pressure)			
hFQ200R3	1/2"	1.0	3/8" BSPF		£636.47		



4000



REELWORKS SERIES

POLYPROPYLENE 60°C MAX

FEATURES / BENEFITS

- · Lightweight and durable, just 5.7 kg
- · Constructed in high-impact UV stabilised polypropylene
- Supplied with fitted PVC hose for immediate installation
- Fully assembled, includes 3ft connecting hose
- Suitable for compressed air and water
- Integral wall/overhead mounting bracket
- Latching of hose at any length
- · Fully automatic hose rewind for neat and tidy storage
- Virtually maintenance free



REEL WITH HOSE 60°C MAXIMUM TEMPERATURE 12 BAR MAX, WORKING PRESSURE

PART NUMBER	HOSE ID	LENGTH	INLET/ OUTLET	PRICE
hC705100	1/4"	10 m	1/4"	£148.99
hC705200	5/16"	8 m	1/4"	£148.31

POLYMER HOSE COMPACT

FEATURES

- Supplied with 15 m x 3/8" or 1/2" flexible, premium hybrid polymer hose
- · Hose has no memory and lays flat when in use
- High quality, durable polypropylene housing
- Fully automatic spring rewind
- Low effort, easy to use, rewind tension
- Integral pivoting wall bracket, swivels through 180°
- Latching of hose at any length
- Latching system can be set to free run if required
- Working pressure up to 300 psi (20 bar)



4000

С	ON	IPA	СТ	SI	PRI	NG
R	EW	/INC) A	IR	RE	EL

PART NUMBER	HOSE ID	LENGTH	INLET/ OUTLET	PRICE
hC2752	3/8"	15 m	3/8"	£173.43
hC2753	1/2"	15 m	1/2"	£185.76
hC2753	1/2"	15 m	1/2"	£185.76

POLYMER HIGH VISIBILITY HOSE

FEATURES AND BENEFITS

- Automatic guide system no bunching of hose, layers hose from side to side, neat and tidy every time
- \bullet Slow retraction system prevents hose from speeding back to the reel if the hose is let go safe operation
- · Low tension spring
- · Latching of hose at any length

POLYPROPYLENE GARDEN HOSE

FEATURES AND BENEFITS

- · Lightweight and durable, just 10.6 kg
- · Constructed in high impact UV stabilised polypropylene
- Supplied and fitted with PVC hose for immediate and trouble free installation
- Fully assembled, includes 36"/0.9m connecting hose
- · Complete with water gun & convenient handle for portable use
- Fitted with speed, control to help automatic hose rewinding constant & at a safe speed keeping it under control at all times
- Hose layering system ensures neat & trouble free storage of hose
- Spring fully enclosed & lubricated
- · Integral wall/overhead pivoting bracket
- · Non-snag rollers reduce hose wear





4000

HIGH VISIBILITY SAFETY REELS

PART NUMBER	HOSE CAPACITY	HOSE ID	INLET/ OUTLET	PRICE
hC2782	15 m	3/8"	3/8"	£148.06
hC2783	15 m	1/2"	1/2"	£190.55



PART NUMBER	HOSE CAPACITY	HOSE ID	MAX. WORKING PRESSURE	PRICE
hC2766	20 m	1/2"	10 bar	£189.26





COXREEL SERIES

HEAVY DUTY SPRING REWIND REELS

FEATURES / BENEFITS

BARE REEL WITHOUT HOSE

PART NUMBER

hPLPL350

hSHL3100

hSHL450

hSHL4100

hSHI 550

hSHL635

- · Heavy duty, steel construction with durable, blue powder finish
- . Double supported, solid 1" steel axle
- . Multi-position roller arm gives full range of mounting options
- Four direction, non-snag roller guides reduce hose wear .
- 1/4" steel mounting base for maximum stability • .

HOSE

ID

3/8'

3/8'

1/2'

1/2"

3/4'

1"

HOSE

OD

5/8"

5/8

7/8

7/8"

Supplied without hose

1 1/8"

1 7/16"

LENGTH

15 m

30 m

15 m

30 m

15 m

10.5 m

Slotted and drilled mounting holes for easy installation





REEL WITH HOSE FOR AIR / WATER

	~	400
ssur	е	
STH	SWIVEL	PRICE

21 bai maximum pressure								
PART NUMBER	HOSE ID	HOSE OD	LENGTH	SWIVEL IN / OUT	PRICE			
hPLPL350AW	3/8"	5/8"	15 m	3/8" BSPF	£642.90			
hSHL3100AW	3/8"	5/8"	30 m	3/8" BSPF	£1345.11			
hSHL450AW	1/2"	7/8"	15 m	1/2" BSPF	£819.09			
hSHL4100AW	1/2"	7/8"	30 m	1/2" BSPF	£1303.55			
hSHL550AW	3/4"	1 1/8"	15 m	3/4" BSPF	£1350.52			
hSHL635AW	1"	1 7/16"	10.5 m	1" NPTF	£1571.21			

FOR DIESEL

4000

PRICE

£587.83

£1244.97

£743.69

£1180.11

£1209.56

£1344.88

SWIVEL

IN / OUT

3/8" BSPF

3/8" BSPF

1/2" BSPF

1/2" BSPF

3/4" BSPF

1" NPTF

21 bar maximum pressure								
hSHL450D	1/2"	7/8"	15 m	1/2" BSPF	£931.91			
hSHL4100D	1/2"	7/8"	30 m	1/2" BSPF	£1554.49			
hSHL550D	3/4"	1 1/8"	15 m	3/4" BSPF	£1513.27			
hSHL635D	1"	1 7/16"	10.5 m	1" NPTF	£1627.12			

FOR FOOD INDUSTRY

21 bar maximum pressure							
hSHL450F	1/2"	7/8"	15 m	1/2" BSPF	£1044.98		
hSHL4100F	1/2"	7/8"	30 m	1/2" BSPF	£1780.98		
hSHL550F	3/4"	1 1/8"	15 m	3/4" BSPF	£1694.42		

FOR PRESSURE WASH

REEL WITH HOSE

21 bar maximum pressure							
hMPL350P	3/8"	5/8"	15 m	3/8" BSPF	£1072.56		
hMPL3100P	3/8"	5/8"	30 m	3/8" BSPF	£1614.87		

MANUAL REWIND STEEL REELS

FEATURES / BENEFITS

- · Designed for industrial applications where longer lengths of hose are required
- · Heavy gauge, powder coated, steel construction
- · Ready for wall, floor or overhead installation
- · Direct crank action, combined with twin bearings, requires minimum rewind effort
- · Spring loaded locking pin prevents drum rotation when in use





PART NUMBER	HOSE ID	HOSE OD	LENGTH	SWIVEL IN / OUT	PRICE		
h11254100	1/2"	7/8"	30 m	1/2" BSPF	£620.26		
h11254200	1/2"	7/8"	60 m	1/2" BSPF	£635.15		
h11255100	3/4"	1 1/4"	30 m	3/4" BSPF	£768.18		
Supplied without hose							

FOR AIR / WATER HOSE HOSE SWIVEL PART NUMBER LENGTH ID OD IN / OUT h11254100AW 1/2' 7/8 30 m 1/2" BSPF h11254200AW 1/2" 7/8" 60 m 1/2" BSPF h11255100AW 3/4" BSPF 3/4" 1 1/4' 30 m



4000

PRICE

£743.87

£900.61

£1048.26





4000

COXREEL SERIES

MANUAL REWIND WITHOUT HOSE

FEATURES / BENEFITS

- Designed for industrial applications where longer lengths of hose are required
- Heavy gauge, powder coated, steel construction
- Ready for wall, floor or overhead installation
- Direct crank action, combined with twin bearings, requires minimum rewind effort
- · Spring loaded locking pin prevents drum rotation when in use



PART NUMBER	HOSE ID	HOSE OD	LENGTH	SWIVEL IN / OUT	PRICE
h11756100	1"	1 7/16"	30 m	1" NPTF	£1175.51

Supplied without hose

MANUAL SPRING REWIND WITHOUT HOSE

65 – 100 FT

FEATURES / BENEFITS

- · Constructed from tubular & formed steel for superior strength & durability
- · Corrosion resistant, powder coated finish, black as standard
- · Full flow, brass swivel assembly ensures maximum flow
- · Suitable for floor, wall, workbench mounting, ideal for mobile applications
- · Spring loaded lock pin prevents hose from de-reeling





BARE REEL WITHOUT HOSE FOR LOW / MEDIUM PRESSURE AIR / WATER

PART NUMBER	HOSE ID	LENGTH	MAX. PRESSURE	INLET / OUTLET	PRICE
hC2083100H	3/8"	30 m	207 bar	3/8"	£182.75
hC208465H	1/2"	20 m	207 bar	1/2"	£179.04

270 – 350 FT

FEATURES / BENEFITS

- · Designed for applications where longer lengths of hose are required
- · Constructed in heavy, gauge powder coated steel
- Full flow swivel joint
- · Open hose slot drum design, Oil-lite self lubricating bearings
- · Spring loaded lock pin prevents hose from de-reeling





FOR LOW / MEDIUM PRESSURE AIR / WATER

4000

PART NUMBER	HOSE ID	LENGTH	MAX. PRESSURE	INLET / OUTLET	PRICE
hC4603350H	3/8"	105 m	207 bar	3/8"	£255.48
hC4604270H	1/2"	80 m	207 bar	1/2"	£251.76



SPRING REWIND HOSE REELS



REELWORKS SERIES

50 FT

FEATURES / BENEFITS

- · Corrosion resistant powder coating
- · Guide arm, adjustable handling, up to 9 positions
- Multi-position ratchet lock









REEL WITH HOSE FOR LOW PRESSURE AIR / WATER

Black reel with black hose								
PART NUMBER	HOSE LENGTH MAX. INLET / PRICE							
hC808350L	3/8"	15 m	21 bar	3/8"	£358.08			
hC808450L	1/2"	15 m	21 bar	1/2"	£476.27			
FOR MEDIUM PRESSURE AIR / WATER								

Black reel with black hose									
hC808350M	3/8"	15 m	155 bar	3/8"	£486.51				
Light grey reel with red hose									
hC808450M	1/2"	15 m	138 bar	3/8"	£540.75				

25 FT

FEATURES / BENEFITS

- · Heavy duty steel construction with corrosion resistant powder coating
- · Multi position ratchet lock

REEL WITH HOSE

AIR / WATER

- Spring fully enclosed and lubricated
 6 1/2" wide L-shaped base ensures stable support
- Guide arm adjustable for handling up to 9 positions
- · Wall, ceiling or floor mounted



PART NUMBER	HOSE ID	LENGTH	MAX. PRESSURE	INLET / OUTLET	PRICE
hC809325L	3/8"	8 m	21 bar	3/8"	£276.71

50 – 100 FT

FEATURES / BENEFITS

- · Non-snag roller guides reduce hose wear
- · Latching of hose at any length
- · Corrosion resistant, powder coated finish, black as standard
- Full flow, internal swivel assembly ensures maximum flow
- Suitable for floor, wall, ceiling or vehicle mount

3/4"

1"

20 m

15 m

· Fully automatic hose rewind for neat and tidy storage



PART NUMBER

hC88041001

hC880550L

hC880650L

4000



3/4"

1"

£858.12

£880.01

FOR LOW PRESS AIR / WATER

URE			4000	
HOSE ID	LENGTH	MAX. PRESSURE	INLET / OUTLET	PRICE
1/2"	30 m	21 bar	1/2"	£793.95

21 bar

21 bar

neteen



SPRING REWIND HOSE REELS

Redashe

STAINLESS STEEL

FEATURES AND BENEFITS

- · Heavy duty stainless steel construction
- · Double supported, solid 1" stainless steel axle
- · Fully automatic hose rewind for neat and tidy storage Slotted and drilled mounting holes for easy installation
- · Latching of hose at any length
- Non-snag roller guides reduce hose wear
 Externally mounted, full flow, stainless steel swivel assembly
- · Supplied as a bare reel (hose supplied at an extra cost)



STAINLESS STEEL SPRING REWIND HOSE REEL SUPPLIED AS BARE REEL



4000

You may also need	Rubber alloy air hose
on	page 507, section 10

PART NUMBER	HOSE CAPACITY	HOSE ID	MAX. WORKING PRESSURE	PRICE
hCSS808-350L	15 m	3/8"	20 bar	£777.65
hCSS808-450L	15 m	1/2"	20 bar	£777.65
hCSS808-465L	20 m	1/2"	20 bar	£851.58
hCSS808-350M	15 m	3/8"	200 bar	£833.99
hCSS808-450M	15 m	1/2"	200 bar	£833.99

Supplied as bare reel

please contact your distributor if you require a suitable hose

SPRING REWIND REEL ACCESSORIES

MOUNTING BRACKET 180° SWIVEL	4000
---------------------------------	------

PART NUMBER	DESCRIPTION	PRICE
hT15720	Heavy duty steel. For use with P & SH Series	£126.92
hT15725	Heavy duty steel. For size index 4 SH & size index 3 MP Series	£247.14

MOUNTING BRACKET DIVOTING

FIVOTING	4 4	4000
PART NUMBER	DESCRIPTION	PRICE
hCP/B2 140	Steel wall bracket. For use with 809 Series	£48.23
hCP/B3 340	Heavy duty steel base unit. For use with 808, 809 and 820 Series	£58.59
hCP/B4 140	Steel wall bracket. For use with 808 Series	£51.69

You may also need ...

Hydraulic hose





SPRING REWIND CABLE REELS



240 VOLT REEL

FEATURES

- · Compact, lightweight design
- · Supplied with 15 m of 3 core, 1.5 mm cable
- Fitted inlet cable for connection to supply
- · Integral wall mounting swivel bracket
- · Latching of cable at any length
- · Fully automatic spring rewind
- · Low effort, easy to use rewind tension
- · Virtually maintenance free

REEL WITH CAB				4000
PART NUMBER	CABLE LENGTH	VOLTAGE	AMPS IN / OUT	PRICE
hC605100	15 m	240 V	3 / 10	£133.02

n Con

240 VOLT POLYPROPYLENE REEL

FEATURES AND BENEFITS

- Lightweight and durable, just 11 kg
- Constructed in high impact UV stabilised polypropylene
- · Supplied with 25 m x 3 core 1.5 mm cable
- · 1.3 mm fitted inlet cable
- · Supplied with fitted pivoting wall bracket
- · Latching of cable at any length · Fully automatic spring rewind action
- · Fitted circuit breaker
- · Supplied with fitted UK plug and sockets 12 month manufacturer's warranty (excluding cable)



230 VOLT REEL

FEATURES AND BENEFITS

- · Slow retraction system prevents hose from speeding back to the reel if
- the hose is let go safe operation
- · Lightweight and durable, from just 7 kg
- · Supplied with 15 m of 3 core, 1.5 mm cable
- · Integral wall mounting swivel bracket
- · Latching of cable at any length
- · Fitted circuit breaker
- · Electricity indicator LED light
- 1.5 m fitted inlet cable
- Supplied with fitted UK plug and sockets
- · For indoor use only · 2 Year limited warranty

SAFETY CABLE REEL 230 V 4000 CABLE MAX PART NUMBER CORE PRICE LENGTH VOLTAGE hC2681 15 m 3 x 1.5 mm 230 V £200.85



SPRING REWIND CABLE REELS



240 VOLT REELS

FEATURES AND BENEFITS

- · Constructed in high impact UV stabilised polypropylene
- Lightweight design, just 1.8 kg 2.0 kg
- Supplied with fitted H05VV-F cable
- · Powder coated, integral wall/ceiling bracket
- · Latching of cable at any length, or a free run option
- Manually restorable circuit breaker
- Fully automatic spring rewind
- · Low effort, easy to use rewind tension
- Virtually maintenance free
- Supplied with 1.3 m inlet cable, 3 pin UK plug and socket

SPRING REWIND CABLE REEL

5 M				4000
PART NUMBER	LENGTH	CORE	MAX VOLTAGE	PRICE
hYRC25	5 m	3 x 1.5 mm	240 V	£182.84

FEATURES AND BENEFITS

- · Constructed in high impact UV stabilised polypropylene
- · Lightweight design, just 3.5 kg 3.8 kg
- Supplied with fitted H05VV-F cable
- · Powder coated, integral wall/ceiling bracket
- Latching of cable at any length, or a free run option
- Manually restorable circuit breaker
- Fully automatic spring rewind
- Low effort, easy to use rewind tension
- Virtually maintenance free
- · Supplied with 1.3 m inlet cable, 3 pin UK plug and socket



10 M



PART NUMBER	LENGTH	CORE	MAX VOLTAGE	PRICE
hYRC100	10 m	3 x 1.5 mm	240 V	£239.23

COMPACT

FEATURES AND BENEFITS

- · Constructed in high impact UV stabilised polypropylene
- · Lightweight design, just 8.2 kg and 12 kg
- · Powder coated, integral wall/ceiling bracket
- · Latching of cable at any length or a free run option
- · Manually restorable circuit breaker
- · Fully automatic spring rewind
- Low effort, easy to use rewind tension
- · Virtually maintenance free
- · Supplied with 1.3 m inlet cable, 3 pin UK plug and socket





PART NUMBER	LENGTH	CORE	MAX VOLTAGE	PRICE
hYRC2500	20 m	3 x 1.5 mm	240 V	£473.71
hYRC3500	35 m	3 x 1.5 mm	240 V	£598.34

KOREEL CABLE REELS

FEATURES AND BENEFITS

- Constructed in ABS plastic
- · Latching of cable at any length
- Fully automatic spring rewind
- · Low effort, easy to use rewind tension
- · Supplied with fitted cable
- Virtually maintenance free
- · Integral wall mounting swivel bracket



Nineteen



SPRING REWIND CABLE REELS



SPRING REWIND CABLE REELS

FEATURES AND BENEFITS

- · Impact resistant polypropylene construction
- · Latching of cable at any length
- Fully automatic spring rewind
- · Low effort, easy to use, rewind tension · Supplied with fitted cable plus standard 16A plug & socket
- · Virtually maintenance free
- Wall mounted swivel bracket
- IP42 rated
- Max amperage cable in 8 amp / cable out 16 amp




FEATURES AND BENEFITS

- Aluminium construction
- · Latching of cable at any length
- Fully automatic spring rewind
- · Low effort, easy to use, rewind tension

SPRING REWIND CABLE REEL

- · Supplied with fitted cable plus standard 16A plug & socket
- · Virtually maintenance free
- Wall mounted swivel bracket
- IP65 rated
- Max amperage cable in 8 amp / cable out 16 amp





15 M



PART NUMBER	LENGTH	CORE	MAX VOLTAGE	PRICE
hYZ6185/IP65	15 m	3 x 2.5 mm	110 V	£766.37

CABLE / CORD REELS

FEATURES AND BENEFITS

- · Heavy duty, powder coated, steel construction provides a high quality chip resistant surface
- Auto rewind easily wraps, stores and protects the cable
- · Multi position latching assembly secures cable at any length
- · Overloading protect function with circuit breaker built into rear housing
- · Guide arm adjusts to wall, floor and overhead payout directions
- · 4 Roller non-snag cable guide
- · 2 m Lead-in cable included
- · CE approved



WARNING TAPE BARRIER REELS

FEATURES AND BENEFITS

- · Constructed in high impact UV stabilised polypropylene
- · Ideal for preventing people entering an unsafe or restricted area . The tape is manufactured from a strong durable woven textile
- (width 48 mm)
- · Equipped with slow retraction system, prevents tape from speeding back to the reel if the tape is let go - Safe Operation



RED / WHITE

PART NUMBER	LENGTH	TAPE COLOUR	PRICE
hSR100-06	16 m	Red / White	£222.50

FEATURES AND BENEFITS

- · Constructed in high impact UV stabilised polypropylene
- · Ideal for preventing people entering an unsafe or restricted area . The tape is manufactured from a strong durable woven textile
- (width 48 mm)
- · Equipped with slow retraction system, prevents tape from speeding back to the reel if the tape is let go - Safe Operation



PART NUMBER	LENGTH	TAPE COLOUR	PRICE
hSR100-05	16 m	Yellow / Black	£222.50





OPEN REELS

INCLUDES

1 x Freestanding hose reel, 25 m of 12.5 mm hose, 1 x nozzle, 2 x hose connectors, 1 x waterstop, 1 x 3/4" / 1/2" tap connector.



FREESTANDING

PART NUMBER	DESCRIPTION	PRICE
HZ2412	Freestanding hose reel	£57.85

INCLUDES

Wheeled hose reel, 30 m of 12.5 mm Maxi Plus hose, 1 x nozzle, 2 x hose connectors, 1 x waterstop, 1 x 1" / 3/4" / 1/2" tap connector.



CLOSED REELS

INCLUDES

Enclosed freestanding or wall mounted hose reel with hose layering, 25 m of 12.5 mm Maxi Plus hose, 1 x nozzle, 2 x hose connectors, 1 x waterstop, 1 x 3/4" / 1/2" tap connector, wall fixings.



INCLUDES

Wall mounted hose reel with geared, easy rewind and automatic hose layering, 40 m of 12.5 mm Maxi Pro hose and 2 m feeder hose. 1 x nozzle, 2 x hose connectors, 1 x waterstop, 1 x 3/4" / 1/2" tap connector. With wall fixings and corner hose guide.



WALL MOUNTED FAST REEL

WITH 40 M HOSE	•	1366
PART NUMBER	INCLUDES	PRICE
HZ2496	Wall mounted hose reel, geared, easy rewind	£179.37

OPEN CART

INCLUDES

Wheeled hose reel, 2 x PLUS hose end connectors,







HOSE & HOSE CONNECTORS



HOSE – WATERING RANGE

SUITABILITY

FEATURES / BENEFITS • 10 year guarantee

· Hard wearing

SPECIFICATIONS

Construction Four layer design: a smooth PVC inner layer to allow maximum flow, a thick PVC layer to add strength, a braided polyester layer to stop expansion of the hose and a tough PVC outer layer.

MAXI PLUS STARTER SET CONTAINS

- 1 x 30 m Maxi Plus general purpose braided hose
- 1 x 3/4" and 1/2" Tap connector to attach to an outside tap
- 1 x Hose end connector to attach the hose to the tap
- 1 x Aquastop connector to connect the end of the hose to the nozzle
- 1 x Spray nozzle



MAXI PLUS STARTER SET

12	.5 MM DIA	ALL AND ALL AND A	1366
	PART NUMBER	DESCRIPTION	PRICE
	HOZ-72309000	Hose and fitting starter set	£52.05



MAXI PLUS YELLOW WITH G 30 metre coils		E		1366
PART NUMBER	mm	ins	ins.	PRICE
HOZ-7230	12.5	1/2	3/4	£41.22

HOSE END CONNECTORS

HOSE NOZZLE	e(1366
PART NUMBER	DESCRIPTION	PRICE
HZ2292	Adjustable from jet to fine spray	£13.86







PART NUMBER

HZ2676



HOSE FITTINGS



4000

1366

£12.82

HOSE FITTINGS

Y CONNECTOR

OUTDOOR TAP O 1" BSP		1366
PART NUMBER	DESCRIPTION	PRICE
HZ2158	For outdoor threaded taps	£8.09



PART NUMBER	DESCRIPTION	PRICE
HZ2293	Allows 3 hoses to be joined using 3 hose connectors	£7.70



DOUBLE MALE C	UNNECTOR

PART NUMBER	DESCRIPTION	PRICE
HZ2291	Allows 2 hoses to be joined using 2 hose connectors	£6.05

OUTDOOR TAP CONNECTOR 3/4" BSP / 1/2" BSP

	01	1500
PART NUMBER	DESCRIPTION	PRICE
HZ2175	For outdoor threaded taps	£7.92

HOSE REPAIR CONNECTOR 12.5 mm

PA

1366

-

5 mm		1366
ART NUMBER	DESCRIPTION	PRICE
HZ2100	For repairing damaged hose	£7.00



HOSE FITTINGS – PLUS

HOSE END CONN 12.5 mm & 15 mm		1366
PART NUMBER	DESCRIPTION	PRICE
HZ2050	Soft touch filling Flexible tail prevents kinking	£9.91

AQUASTOP CONNECTOR 12.5 mm & 15 mm

ADUA STOP INTO	
	≤ 11
1000	

HOZHOCK

PART NUMBER	DESCRIPTION	PRICE
HZ2055	Valve shuts off water when accessory is disconnected	£11.31

METAL HOSE FITTINGS – PRO

OUTDOOR TAP 0 3/4" BSP / 1/2" B3		1366
PART NUMBER	DESCRIPTION	PRICE
HZ2041	For outdoor threaded taps	£10.50
DOUBLE MALE CONNECTOR 1366 PART NUMBER DESCRIPTION PRICE		
PART NUMBER	DESCRIPTION Allows two hoses to be joined	PRICE
PART NUMBER HZ2044	DESCRIPTION Allows two hoses to be joined	PRICE £10.50

OUTDOOR TAP C 1" BSP		1366	
PART NUMBER	DESCRIPTION	PRICE	
HZ2042	For outdoor threaded taps	£12.85	
HOSE REPAIR CONNECTOR 12.5 MM			
PART NUMBER	DESCRIPTION	PRICE	
HZ2043	For repairing damaged hose	£11.65	
AQUASTOP CONNECTOR 12.5 MM & 15 MM 1366			
		1366	

Valve shuts off water

when accessory is disconnected

HZ2035



SPRAYERS



SPRAYERS PLUS

DESCRIPTION


- · Small, heavy duty pressure sprayer
- · Lockable on/off flow control for
- continuous spraving

1.25 LITRE SPRAYER

PART NUMBER

HZ4122P

 Nozzle adjustment from fine jet to mist • 3 Years guarantee



1366

PRICE

£25.90

DESCRIPTION

filling and emptying Covers up to 210 m² · 3 Years guarantee **7 LITRE SPRAYER** 1366

PART NUMBER	CAPACITY	PRICE
HZ4231	7 litres	£45.33

DESCRIPTION

- · Specifically designed for spraying larger areas
- · Contoured container, shaped to
- comfortably fit the operator's back
- Covers up to 480 m² · 3 Years guarantee



25

CAPACITY

1.25 litres



16 LITRE SPRAYER


PART NUMBER

HZ4716

SPRAYERS PRO

DESCRIPTION

- · Small, heavy duty pressure sprayer for
- the application of aggressive chemicals
- Equipped with Viton[™] fluoroelastomer seals
- 2 Years guarantee



DESCRIPTION

- · Lockable on/off flow control for continuous spraying
- Equipped with Viton[™] fluoroelastomer seals
- 2 Years guarantee

