














Bright Mild Steel Infill Panels		Suits	Length	Height	Weight	RRP PER PAIR
FB 33 33 Inch Infill Panel		SR 1333	838 mm 33 Inches	419 mm 16.5 Inches	6.5 Kg	\$80
FB 36 36 Inch Infill Panel		DR 1136, SR 10.75 36, SR 1336	914 mm 36 Inches	419 mm 16.5 Inches	7 Kg	\$85
FB 60 60 Inch Infill Panel		TTSR 960, TTSR 1060	1524 mm 60 Inches	306 mm 12 Inches	10 Kg	\$70
FB 64 64 Inch Infill Panel		TSDR 964RT, TSDR 1064RT	1626 mm 64 Inches	306 mm 12 Inches	11 Kg	\$70
FB 66 66 Inch Infill Panel		TTSR 966, TTSR 1066, TTSR 1166, TTSR 1266	1676 mm 66 Inches	306 mm 12 Inches	12 Kg	\$80
FB 72 72 Inch Infill Panel		TTSR 1072	1829 mm 72 Inches	306 mm 12 Inches	13 Kg	\$90
Galvanized Coated Infill Panels		Material	Length	Height	Weight	RRP PER PAIR
FB 30G		SR 930G, SR 1030G	762 mm 30 Inches	369 mm 14.5 Inches	5 Kg	\$90
FB 32G		SR 1032G	813 mm 32 Inches	381 mm 15 Inches	6 Kg	\$100
FB 60G		TTSR 960G	1524 mm 60 Inches	306 mm 12 Inches	10 Kg	\$95
FB 66G		TTSR 966G, TTSR 1066G	1676 mm 66 Inches	306 mm 12 Inches	12 Kg	\$105
Smooth Aluminum Infill Panels		Material	Length	Height	Weight	RRP PER PAIR
FB 30A		DR 17.5 30A	762 mm 30 Inches	366 mm 14.4 Inches	2 Kg	\$120
FB 33A		DR 17.5 33A	838 mm 33 Inches	419 mm 16.5 Inches	2 Kg	\$120






Fender Steps / Brackets						
Size	Material	Width	Length	Height	Weight	RRP
Large	Mild Steel	11 inch / 279 mm	11.75 inch / 299 mm	3.38 inch / 86 mm	9.0 kg	\$325*
Part Numbers: FSLRFLR / FSLLFRR		Will suit 7.5", 9", 10", 11", 12" and 13" wide fenders				
Small	Mild Steel	11 inch / 279 mm	3.88 inch / 99 mm	2.5 inch / 64 mm	4.6 kg	\$265*
Part Numbers: FSLRFLR / FSLLFRR		Will suit 7.5", 9", 10", 11", 12" and 13" wide fenders.				
*Price is for set of four steps						

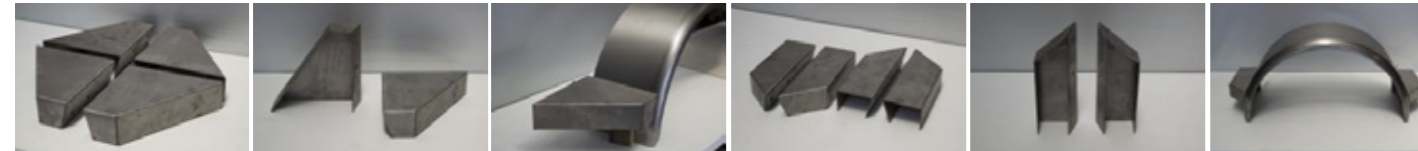








Aluminum Scissor Steps					
Steps	Step Size	Extended Height Min - Max	Weight	Price - Part No	
3	8.75 inch x 24 inch (223 mm x 610 mm)	24 inch / 610 mm 30 inch / 762 mm	10.5 kg	\$475.00 SSA 2430-3	
	Optional Hand Rail		3.2 kg	\$152.00 - HR 3	
4	8.75 inch x 24 inch (223 mm x 610 mm)	31 inch / 788 mm 39 inch / 991 mm	12.5 kg	\$560.00 SSA 3139-4	
	Optional Hand Rail		3.4 kg	\$175.00 - HR 4	
5	8.75 inch x 24 inch (223 mm x 610 mm)	40 inch / 1016 mm 48 inch / 1220 mm	15 kg	\$710.00 SSA 4048-5	
	Optional Hand Rail		3.7 kg	\$195.00 - HR 5	




Large One Tonner | Custom Street | 350 Duallys | 150-750 Light Trucks
Classic Full Size Duallys | Big Rig | Tubs | 379 Peterbilt

Accessories	Mounting	Height	Width	Depth	Load Rating	Weight	Price
GRR11 Recessed Rope Ring with pan	 Bolt On	100 mm 4 Inch	70 mm 2.75 Inch	13 mm .5 Inch	770 lbs	0.2 Kg	\$3.60
GRR10 360 Degree Tie-Down	 Bolt-On		89 mm 3.5 Inches	13 mm 0.5 Inch	1800 lbs	0.2 Kg	\$7.00
GRR06 360 Degree Tie-Down	 Bolt-On		159 mm 6.25 Inches	25 mm 1 Inch	6,000 lbs	1.0 Kg	\$25.00
GRRS6 360 Degree Stainless Steel Tie Down	 Bolt-On		159 mm 6.25 Inches	25 mm 1 Inch	6,000 lbs	1.0 Kg	\$65.00
GBP06 Tie-Down Backing Plate	 Bolt-On		159 mm 6.25 Inches			0.3 Kg	\$10.00

Accessories	Mounting	Ring Thickness	Outside Width	Inside Width	Load Rating	Weight	Price
GSR 10	 Bolt -On Surface Rope Ring	9 mm .375 Inch	46 mm 1.78 Inches	38 mm 1.5 Inches	1000 lbs	60 gm	\$2.00
GWR15	 Weld-On Surface Rope Ring	9 mm .375 Inch	54 mm 2.125 Inches	35 mm 1.375 Inches	5,000 lbs	0.25 Kg	\$3.60
GLRW5	 Weld-On Surface Rope Ring	9 mm .375 Inch	63 mm 2.5 Inches	51 mm 2 Inches	6,000 lbs	0.30 Kg	\$10.00
GLRW0	 Weld-On Surface Rope Ring	13 mm .5 Inch	86 mm 3.375 Inches	60 mm 2.375 Inches	11,700 lbs	.4 Kg	\$15.00
GLRW1	 Weld-On Surface Rope Ring	16 mm .625 Inch	108 mm 4.25 Inches	76 mm 3 Inches	18,000 lbs	0.75 Kg	\$20.00

Accessories	Mounting	Dimensions	Weight	Price
GSL78SPC	 Clear Oval Reflector (Adhesive back and screw holes)	110 x 47 mm, 4.25 x 1.75 Inches	0.021 Kg	\$5
GSL78SPA	 Amber Oval Reflector (Adhesive back and screw holes)	110 x 47 mm, 4.25 x 1.75 Inches	0.021 Kg	\$5
GSL78SPR	 Red Oval Reflector (Adhesive back and screw holes)	110 x 47 mm, 4.25 x 1.75 Inches	0.021 Kg	\$5

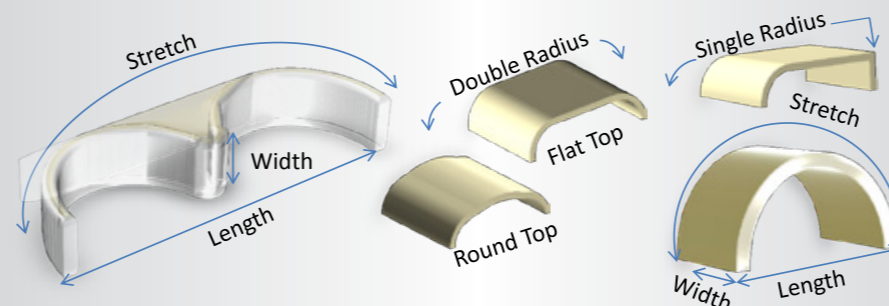

Round Style Mudguards for
Trailers, Hot Rods, Bikes and Custom Street

Retail Price List

Bright Mild Steel Fenders	Material	Width	Length	Stretch	Height	Weight	RRP PER PAIR
DR 5 26 RT-Round Top Single Axle Double Radius	 14 Gauge Mild Steel	127 mm 5 Inches	661 mm 26 Inches	1029 mm 40.5 Inches	324 mm 12.75 Inches	5 Kg	\$120
DR 5 28 RT-Round Top Single Axle Double Radius	 14 Gauge Mild Steel	127 mm 5 Inches	711 mm 28 Inches	1118 mm 44 Inches	368 mm 14.5 Inches	5.5 Kg	\$130
DR 5 30 RT-Round Top Single Axle Double Radius	 14 Gauge Mild Steel	127 mm 5 Inches	762 mm 30 Inches	1238 mm 48.75 Inches	394 mm 15.5 Inches	6 Kg	\$140
DR 6 26 RT-Round Top Single Axle Double Radius	 14 Gauge Mild Steel	153 mm 6 Inches	661 mm 26 Inches	1029 mm 40.5 Inches	324 mm 12.75 Inches	6 Kg	\$130
DR 6 28 RT-Round Top Single Axle Double Radius	 14 Gauge Mild Steel	153 mm 6 Inches	711 mm 28 Inches	1118 mm 44 Inches	368 mm 14.5 Inches	7 kg	\$140
DR 6 30 RT-Round Top Single Axle Double Radius	 14 Gauge Mild Steel	153 mm 6 Inches	762 mm 30 Inches	1238 mm 48.75 Inches	394 mm 15.5 Inches	8 Kg	\$150
DR 6 31RT-Round Top Single Axle Double Radius	 14 Gauge Mild Steel	153 mm 6 Inches	787 mm 31 Inches	1118 mm 44 Inches	368 mm 14.5 Inches	7 kg	\$160
DR 7 7 26 RT-Round Top Single Axle Double Radius	 14 Gauge Mild Steel	196 mm 7.7 Inches	661 mm 26 Inches	1029 mm 40.5 Inches	324 mm 12.75 Inches	7 Kg	\$140
DR 7 7 28 RT-Round Top Single Axle Double Radius	 14 Gauge Mild Steel	196 mm 7.7 Inches	711 mm 28 Inches	1118 mm 44 Inches	368 mm 14.5 Inches	7 kg	\$150
DR 7 6 30 RT-Round Top Single Axle Double Radius	 16 Gauge Mild Steel	193 mm 7.6 Inches	762 mm 30 Inches	1232 mm 48.5 Inches	394 mm 15.5 Inches	7 Kg	\$160
DR 8 5 22.25RT-Round Top Single Axle Double Radius	 14 Gauge Mild Steel	216 mm 8.5 Inches	565 mm 22.25 Inch	889 mm 35 Inches	306 mm 12 Inches	5 Kg	\$120
DR 8 5 26 RT-Round Top Single Axle Double Radius	 14 Gauge Mild Steel	216 mm 8.5 Inches	661 mm 26 Inches	1041 mm 41 Inches	337 mm 13.25 Inches	8 Kg	\$150
DR 8 5 28 RT-Round Top Single Axle Double Radius	 14 Gauge Mild Steel	216 mm 8.5 Inches	711 mm 28 Inches	1118 mm 44 Inches	368 mm 14.5 Inches	7.5 kg	\$160
DR 8 5 30 RT-Round Top Single Axle Double Radius	 14 Gauge Mild Steel	216 mm 8.5 Inches	762 mm 30 Inches	1238 mm 48.75 Inches	400 mm 15.75 Inches	8 Kg	\$170
DR 10 22.25 RT-Round Top Single Axle Double Radius	 14 Gauge Mild Steel	254 mm 10 Inches	711 mm 28 Inches	1118 mm 44 Inches	368 mm 14.5 Inches	7.6 Kg	\$140
DR 10 26 RT-Round Top Single Axle Double Radius	 14 Gauge Mild Steel	254 mm 10 Inches	661 mm 26 Inches	1086 mm 42.75 Inches	349 mm 13.75 Inches	9 Kg	\$160
DR 10 28 RT-Round Top Single Axle Double Radius	 14 Gauge Mild Steel	254 mm 10 Inches	711 mm 28 Inches	1118 mm 44 Inches	368 mm 14.5 Inches	8 kg	\$170
DR 10 30 RT-Round Top Single Axle Double Radius	 14 Gauge Mild Steel	254 mm 10 Inches	762 mm 30 Inches	1232 mm 48.5 Inches	394 mm 15.5 Inches	9 Kg	\$180

