
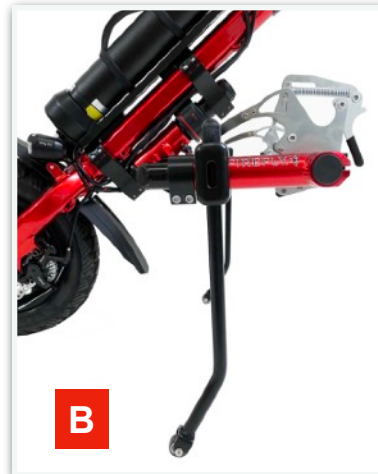



How to install the kickstands for the Firefly™ 2.5

There are 2 possible ways to mount the kickstand. The most common is to position the rounded faceplate out, screws on the inside with the bend facing back “A”.

The alternative position is the same clamping method as above but if the kickstand touches your front casters, change the bend direction to face away from your chair “B”.

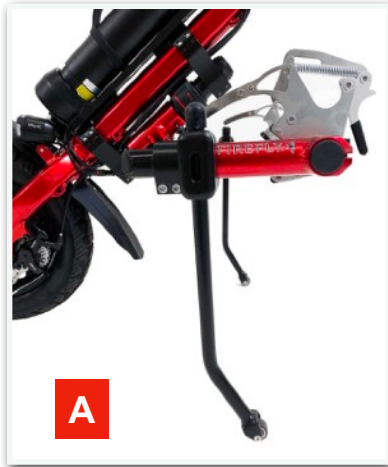

Push the kickstand clamp up against the coupler clamp “C”. Tighten the screws loosely at first using your 4mm hex wrench. Fully tighten down the screws in a diagonal configuration. If the clamp pulls too close on one side, back off that screw and cinch down the remaining screws with more tension.

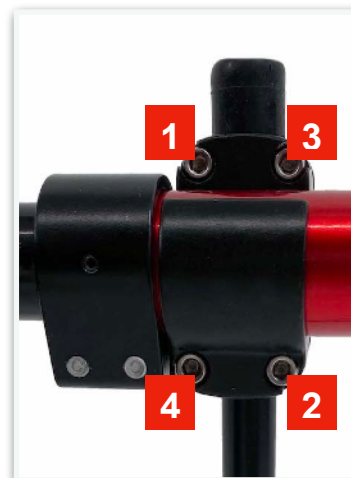

(Tighten down the screws in a diagonal configuration, do not over tighten the screws to avoid damaging them.)



(Make sure the wheels are straight so they easily roll forward and backwards)