

## AIR LASSO

SPECIFICATIONS AND TECHNICAL DATA

### FEATURES:

- Industrial Strength Construction
- Hood Mounted Controls
- Versatile Design
- Smooth Tube Construction
- Air Diverter in the Hood
- Hood and Tube Grab Handles
- External Joints and Supports

### TYPICAL APPLICATIONS:

- WELDING SMOKE AND FUMES
- GRINDING DUST
- POWDERS
- OTHER DRY DUSTS

### BENEFITS:

- WITHSTANDS RIGORS OF INDUSTRIAL USE
- USER-FRIENDLY CONTROLS
- EASE OF OPERATION
- HIGHER AIRFLOW PERFORMANCE
- INCREASED CAPTURE VELOCITY
- EASY MOVEMENT AND POSITIONING
- LESS RESTRICTION, HOLDS POSITION



DAMN INDUSTRIES' AIR LASSOS ARE AVAILABLE IN 4", 6" OR 8" DIAMETER, PROVIDE VERSATILITY, DURABILITY, AND AN ECONOMICAL METHOD OF COLLECTING PARTICULATE AT THE SOURCE.


AIR LASSOS ARE EXTERNALLY SUPPORTED, WITH NO INTERNAL WORKING PARTS OTHER THAN THE DAMPER, OFFERING INCREASED AIRFLOW, EASE OF MOVEMENT, AND EXACT POSITIONING.

### SPECIFICATIONS:

- DI 405 4" DIA. X 5' L
- DI 407 4" DIA. X 7' L
- DI 607 6" DIA. X 7' L
- DI 609 6" DIA. X 9' L
- DI 612 6" DIA. X 12' L
- DI 807 8" DIA. X 7' L
- DI 809 8" DIA. X 9' L
- DI 812 8" DIA. X 12' L

### OPTIONS:

- EXHAUSTERS
- HOOD MOUNTED 12V HALOGEN LAMP
- BOOM ARM EXTENSIONS 10' OR 14'

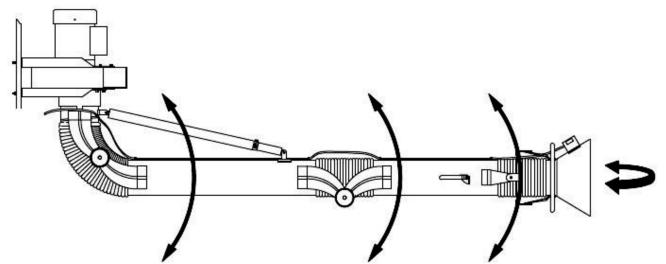

HP	VOLTAGE	PHASE	ARM DIA.	ARM LENGTH	CFM	DBA @ 5'
1	120	1	4"	5', 7'	1275	79
1	120	1	6"	7', 9', 12'	1825	84
1	230/460	1	6"	7', 9', 12'	1825	83
3	230/460	3	6"	7', 9', 12'	2000	94
3	230/460	3	8"	7', 9', 12'	2000	94